


SIM8051-6-0-14-00-A Datasheet

www.digi-electronics.com

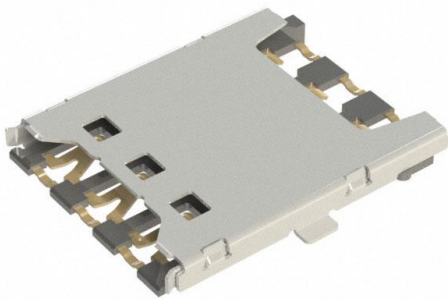

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	SIM8051-6-0-14-00-A-DG
Manufacturer	GCT
Manufacturer Product Number	SIM8051-6-0-14-00-A
Description	NANO SIM PUSH PULL, 6P,SMT, 1.35
Detailed Description	6 Position Card Connector NANO SIM Surface Mount, Right Angle Gold

This model SIM8051-6-0-14-00-A is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

SIM8051-6-0-14-00-A

Series:

SIM8051

Card Type:

NANO SIM

Connector Type:

Connector

Ejector Side:

-

Features:

-

Mounting Feature:

Normal, Standard - Top

Contact Finish Thickness:

3.00µin (0.076µm)

Manufacturer:

GCT

Product Status:

Active

Number of Positions:

6

Insertion, Removal Method:

Push In, Pull Out

Mounting Type:

Surface Mount, Right Angle

Height Above Board:

0.053" (1.35mm)

Contact Finish:

Gold

Base Product Number:

SIM8051

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8536.69.4040

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

PRODUCT SPECIFICATION

Part Number	SIM8051	Rev	A	Date	28/04/15		
Product Description	Nano SIM Card Connector, Push-Pull Type, 6 Pin, SMT, 1.35mm Profile			Page	2		
Doc Number	SIM8051	Prepared	AO	Checked	VJ	Approved	ST

1.0 SCOPE.

This specification covers performance, tests and quality requirements for the Nano SIM Card Connector SIM 8051 (Push-Pull Type, 6-Pin, SMT, 1.35mm Profile).

2.0 PRODUCT NAME AND PART NUMBER.

Nano SIM Card Connector, 6 Pin, Push-Pull Type: SIM8051.

3.0 PRODUCT SHAPE, DIMENSIONS AND MATERIAL.

Please refer to drawings.

4.0 RATINGS.

Current rating 0.5 Amp Max
 Voltage rating 30 Volts AC (rms.) Max.
 Operating Temperature Range -40°C to +85°C
 Storage Temperature -25°C to +85°C
 Storage Humidity..... Relative Humidity: ≤80%

5.0 TEST AND MEASUREMENT CONDITIONS.

Product is designed to meet electrical, mechanical and environmental performance requirements specified in Paragraph 6.0. All tests are performed at ambient environmental conditions unless otherwise specified.

21M8051-A-0-0-14-00-A GCT ИЛИО 21M 5У2Н 5ИЛГГ' 6Б'2МТ' 1'32

6.0 PERFORMANCE.

Item	Test Condition	Requirement
Examination of Product	Visual, dimensional and functional inspection as per quality plan.	Product shall meet requirements of product drawing and specification.

PRODUCT SPECIFICATION

Part Number	SIM8051	Rev	A	Date	28/04/15
Product Description	Nano SIM Card Connector, Push-Pull Type, 6 Pin, SMT, 1.35mm Profile			Page	3
Doc Number	SIM8051	Prepared	AO	Checked	VJ
				Approved	ST

6.1 Electrical Performance.

Item	Test Condition	Requirement
Contact Resistance	Measure and record contact resistance of mated connector using test current of 10mA max and 20 mV open circuit voltage in accordance with EIA-364-23.	100 mΩ max initial 100 mΩ max after test.
Insulation Resistance	Measure by applying test potential between the adjacent contacts, and between the contacts and ground in the mated connector. In accordance with EIA-364-21.	1000 MΩ minimum @500V DC for 1 minute
Dielectric Strength	Measure by applying test potential between the adjacent contacts, and between the contacts and ground in the mated connector. In accordance with EIA-364-20.	Connector must withstand test potential of 100 V AC for 1 minute. Current leakage must be 1.0 mA Max.

6.2 Mechanical Performance.

Item	Test Condition	Requirement
Durability	Insert & remove SIM card for 1500 cycles. The insertion force under 10N, and the extraction force meet 1~10N In accordance with EIA-364-09.	Contact Resistance: 100 mΩ max. And insertion/extraction force must meet the association specification. After testing.
Vibration	No electrical discontinuity greater than 1 μsec (s) shall occur. Contact resistance: 100 mΩmax.	Vibration conditions, for a period of 2 hours in each of 3 mutually perpendicular axes, with passing DC 1mA during the test, Amplitude: 1.52mm P-P or 19.6m/s ² (2G) Frequency: 10-55-10 Hz In accordance with EIA-364-28
Contact Normal Force	Measure contact normal force at distance equal to inserting a 0.7mm thick nano SIM card.	0.25N Min. 1.50N Max.
Mechanical Shock	Mate card and subjected to the following shock conditions. 3 mutually perpendicular axis, passing DC 1mA current during the test. (Total of 18 shocks) Test pulse: Half sine peak value: 490m/s ² (50G) duration : 11ms In accordance with EIA-364-27.	No electrical discontinuity greater than 1 μsec. shall occur. No damage to product.

PRODUCT SPECIFICATION

Part Number	SIM8051	Rev	A	Date	28/04/15		
Product Description	Nano SIM Card Connector, Push-Pull Type, 6 Pin, SMT, 1.35mm Profile			Page	4		
Doc Number	SIM8051	Prepared	AO	Checked	VJ	Approved	ST

6.3 Environmental Performance and Others.

Item	Test Condition	Requirement
Thermal Shock	The card shall be mated and exposed to the following condition for 25 cycles. 1 cycle a) -40 ± 3 for 30 minutes b) $+85\pm 2$ for 30 minutes transit time shall be within 3 minutes Recovery time 1~2 hours. In accordance with EIA-364-32	No damage, Contact Resistance (Low Level) (Final) 100 mΩ max
Humidity Test	The card shall be mated and exposed to the condition of $+60\pm 2$ @ 90~95% humidity for 96 hours Recovery time 1~2 hours. In accordance with EIA-364-31.	No damage, Contact Resistance (Low Level) (Final) 100 mΩ max.. Dielectric Strength should be OK, Insulation Resistance should be 100 MΩ min.
Salt Water Spray	$5\pm 1\%$ salt concentration 48±4 hours $35\pm 2^\circ\text{C}$ MIL-STD-202, Method 101 Condition B.	No rusty cracks found. Contact Resistance (Low Level) (Final) 100 mΩ max
Temperature Life (High)	Subject product to $85\pm 2^\circ\text{C}$ for 96 hours continuously. MIL-STD-202, Method 108.	Contact resistance: 100 mΩ max
Temperature Rise	Mate card and measure the temperature rise of contact, when rated current is passed. In accordance with EIA-364-70 Method 1.	30°C Max
Solderability	Dip solders tails into molten solder, held at a temperature of $250\pm 5^\circ\text{C}$ up to 0.5mm from the tip of the tails for 3 ± 0.5 seconds.	Contact solder pad has a min. 95% solder coverage
Resistance to Hand Soldering Heat	Soldering iron method Soldering Time: 5 sec. Solder Temperature: $370-400^\circ\text{C}$ 0.5mm from terminal tip	No damage
Resistance to Reflow Soldering Heat	Mount connector, place in reflow oven and expose to the temperature profile shown in fig 1.0	No evidence of physical damage or abnormalities adversely affecting performance.


PRODUCT SPECIFICATION

Part Number	SIM8051	Rev	A	Date	28/04/15
Product Description	Nano SIM Card Connector, Push-Pull Type, 6 Pin, SMT, 1.35mm Profile			Page	5
Doc Number	SIM8051	Prepared	AO	Checked	VJ
				Approved	ST

6.5 REFLOW SOLDERING PROFILE

Pb-free reflow profile requirements

Parameter	Reference	Specification
Average temperature gradient in preheating		2.5°C/s
Soak time	t _{soak}	2-3 minutes
Time above 217°C	t ₁	60 s
Time above 230°C	t ₂	50 s
Time above 250°C	t ₃	5 s
Peak temperature in reflow	T _{peak}	255°C (-0/+5°C)
Temperature gradient in cooling		Max -5°C/s

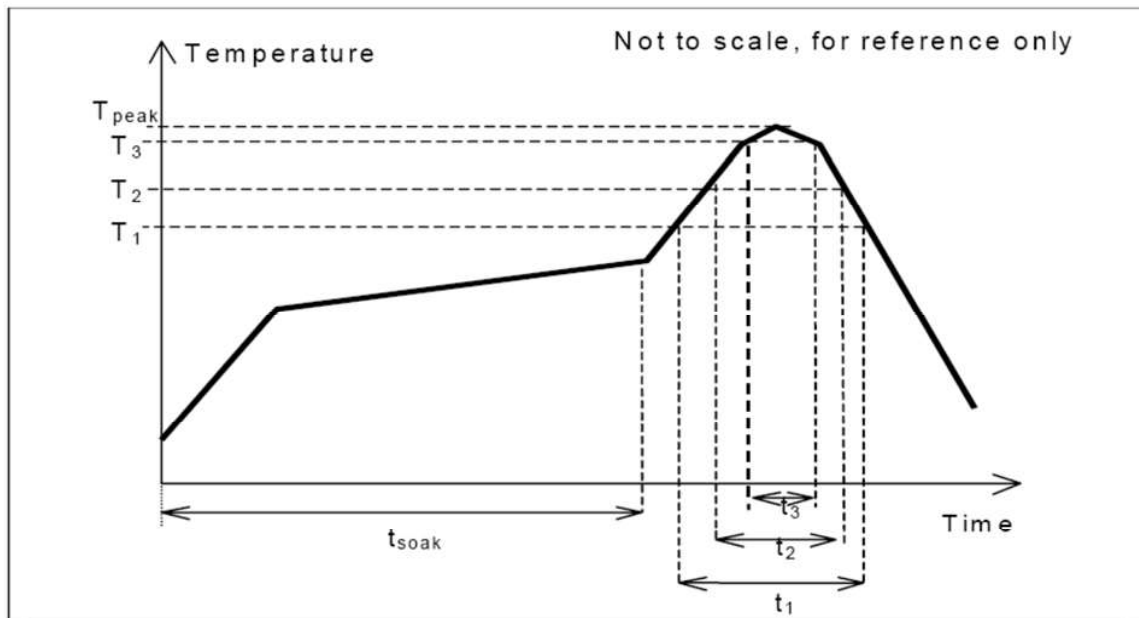

This profile is the minimum requirement for evaluating soldering heat resistance of components. Heat transfer method used for reflow soldering is hot air convection. The actual air temperatures used to achieve the specified profile is higher and largely dependent on the reflow equipment.

PRODUCT SPECIFICATION

Part Number	SIM8051	Rev	A	Date	28/04/15		
Product Description	Nano SIM Card Connector, Push-Pull Type, 6 Pin, SMT, 1.35mm Profile			Page	7		
Doc Number	SIM8051	Prepared	AO	Checked	VJ	Approved	ST

Revision details

Revision	Information	Page	Release Date
A	Specification Released	-	28/04/2015

28/04/2015 13:29, 28/04/2015 13:29, 28/04/2015 13:29, 28/04/2015 13:29, 28/04/2015 13:29

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.