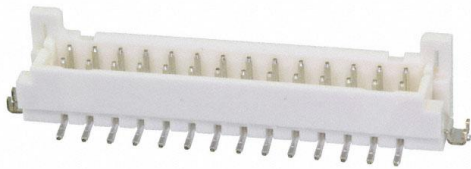


DF11CZ-28DP-2V(27) Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	DF11CZ-28DP-2V(27)-DG
Manufacturer	Hirose Electric Co Ltd
Manufacturer Product Number	DF11CZ-28DP-2V(27)
Description	CONN HEADER SMD 28POS 2MM
Detailed Description	Connector Header Surface Mount 28 position 0.079" (2.00mm)

This model DF11CZ-28DP-2V(27) is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

DF11CZ-28DP-2V(27)

Series:

DF11

Connector Type:

Header

Pitch - Mating:

0.079" (2.00mm)

Number of Rows:

2

Number of Positions Loaded:

All

Shrouding:

Shrouded - 4 Wall

Termination:

Solder

Contact Length - Mating:

-

Overall Contact Length:

-

Contact Shape:

Circular

Contact Finish Thickness - Mating:

39.4µin (1.00µm)

Contact Material:

Brass

Features:

Pick and Place, Solder Retention

Ingress Protection:

-

Insulation Color:

Beige

Voltage Rating:

250V

Contact Finish Thickness - Post:

-

Base Product Number:

DF11C

Manufacturer:

Hirose Electric Co Ltd

Product Status:

Active

Contact Type:

Male Pin

Number of Positions:

28

Row Spacing - Mating:

0.079" (2.00mm)

Style:

Board to Board or Cable

Mounting Type:

Surface Mount

Fastening Type:

Detent Lock

Contact Length - Post:

-

Insulation Height:

0.283" (7.19mm)

Contact Finish - Mating:

Tin

Contact Finish - Post:

Tin

Insulation Material:

Polyamide (PA), Nylon

Operating Temperature:

-30°C ~ 85°C

Material Flammability Rating:

UL94 V-0

Current Rating (Amps):

2A

Mated Stacking Heights:

8.2mm, 8.45mm, 9.55mm

Applications:





-

DiGi is a global authorized distributor of electronic components.

Environmental & Export classification

RoHS Status:

Moisture Sensitivity Level (MSL):

APPLICABLE STANDARD							
RATING	OPERATING TEMPERATURE RANGE	-40°C TO + 85°C (NOTE 1) 		STORAGE TEMPERATURE RANGE	-10°C TO + 60°C (NOTE 2)		
	OPERATING HUMIDITY RANGE	40% TO + 80%		STORAGE HUMIDITY RANGE	40% TO + 70% (NOTE 2)		
	VOLTAGE	250V AC		UL • CSA RATING	VOLTAGE	30V AC	
	CURRENT	AWG 22 TO 26 : 2A AWG 28 : 1A AWG 30 : 0.5A			CURRENT	AWG 22 : 2A AWG 24 TO 28 : 1A AWG 30 : 0.5A	
SPECIFICATIONS							
ITEM	TEST METHOD			REQUIREMENTS		QT	AT
CONSTRUCTION							
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.			ACCORDING TO DRAWING.		X	X
MARKING	CONFIRMED VISUALLY.					X	X
ELECTRIC CHARACTERISTICS							
CONTACT RESISTANCE	100mA (DC OR 1000 Hz).			30mΩ MAX.		X	—
INSULATION RESISTANCE	500V DC.			1000MΩ MIN.		X	—
VOLTAGE PROOF	650V AC FOR 1 min.			NO FLASHOVER OR BREAKDOWN.		X	—
MECHANICAL CHARACTERISTICS							
MECHANICAL OPERATION	30 TIMES INSERTIONS AND EXTRACTIONS.			① CONTACT RESISTANCE: 30mΩ MAX. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.		X	—
VIBRATION	FREQUENCY 10 TO 55 Hz, SINGLE AMPLITUDE 0.75 mm, AT 2 h, FOR 3 DIRECTIONS.			① NO ELECTRICAL DISCONTINUITY OF 1μs. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.		X	—
SHOCK	490 m/s ² DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.					X	—
ENVIRONMENTAL CHARACTERISTICS							
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55→5 TO 35→+85 →5 TO 35 °C TIME 30→5 TO 15 →30 →5 TO 15 min UNDER 5 CYCLES.			① CONTACT RESISTANCE: 30mΩ MAX. ② INSULATION RESISTANCE: 1000MΩ MIN. ③ NO DAMAGE, CRACK OR LOOSENESS OF PARTS.		X	—
DAMP HEAT (STEADY STATE)	EXPOSED AT 40 ± 2 °C, 90 TO 95 %, 96 h.			① CONTACT RESISTANCE: 30mΩ MAX. ② INSULATION RESISTANCE: 500MΩ MIN. ③ NO DAMAGE, CRACK OR LOOSENESS OF PARTS.		X	—
	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE	
	1	DIS-H-008540		MI. SAKIMURA	HK. UMEHARA	14. 02. 26	
				APPROVED	TY. OMA	06. 04. 06	
				CHECKED	HK. UMEHARA	06. 04. 06	
				DESIGNED	NS. HIROSE	06. 04. 06	
				DRAWN	AK. MIURA	06. 02. 22	
Note	QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.	ELC4-307176-02		
	SPECIFICATION SHEET			PART NO.	DF11CZ-*DP-2V (27)		
	HIROSE ELECTRIC CO., LTD.			CODE NO.	CL543		1/2

SPECIFICATIONS

ITEM	TEST METHOD	REQUIREMENTS	QT	AT
RESISTANCE TO SOLDERING HEAT	1) AUTOMATIC SOLDERING (REFLOW) 《REFLOW AREA》 MAX 250°C WITHIN 10 sec. MIN 230°C WITHIN 60 sec. 《PREHEATING AREA》 150 TO 180°C 90 TO 120 sec. PUT THROUGH IN REFLOW FUMACE TWICE. FEAVE IN AMBIENT TEMPERATURE AND HUMIDITY FOR 1 HOUR. CONNEVCTOR TEMPERATURE TO BE AMBIENT FOR SECOND REFLOW. 2) MANUAL SOLDERING SOLDERING IRON TEMPERATURE :290±10°C, SOLDERING TIME :3s. NO STRENGTH ON CONTACT.	NO DEFORMATION OF CASE OF EXCESSIVE LOOSENESS OF THE TERMINALS.	X	—
SOLDERABILITY	SOLDERED AT SOLDER TEMPERATURE, 230±5°C FOR IN IMMERSION , DURATION, 3 s.	A NEW UNIFORM COATING OF SOLDER SHALL COVER MINIMUM OF 95 % OF THE SURFACE BEING IMMersed.	X	—

REMARKS

NOTE 1:INCLUDING THE TEMPERATURE RISE BY CURRENT.

NOTE 2:APPLY TO THE CONDITION OF LONG TERM STORAGE FOR UNUSED PRODUCTS BEFORE PCB ON BOARD , AFTER PCB BOARD , OPERATING TEMPERATURE AND HUMIDITY RANGE IS APPLIED FOR INTERM STORAGE DURING TRANSPORTATION.

NOTE 3:THE TEMPERATURE PROFILE SHALL BE APPLIED WITHIN 168 HOURS AFTER OPENING MOISTURE-PROOF PACKAGING. WHEN 168 HOURS PASSED AFTER OPENING , APPLY THE BOTTOM REQUIREMENTS.

《REFLOW AREA》

MAX 240°C WITHIN 10 sec.

MIN 230°C WITHIN 60 sec.

《PREHEATING AREA》

150 TO 180°C 90 TO 120 s.

Unless otherwise specifid , refer to IEC 60512.

Note QT:Qualification Test AT:Assurance Test X:Applicable Test

DRAWING NO.

ELC4-307176-02

HRS

SPECIFICATION SHEET

PART NO.

DF11CZ-*DP-2V (27)

HIROSE ELECTRIC CO., LTD.

CODE NO

CL543



2/2

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.