


DF1BZ-28DP-2.5DSA Datasheet

www.digi-electronics.com

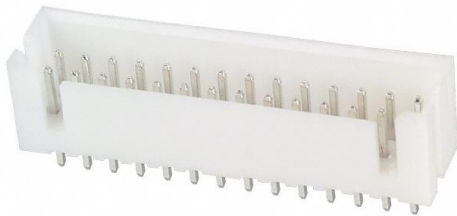


<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	DF1BZ-28DP-2.5DSA-DG
Manufacturer	Hirose Electric Co Ltd
Manufacturer Product Number	DF1BZ-28DP-2.5DSA
Description	CONN HEADER VERT 28POS 2.5MM
Detailed Description	Connector Header Through Hole 28 position 0.098" (2.50mm)

This model DF1BZ-28DP-2.5DSA is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

DF1BZ-28DP-2.5DSA

Series:

DF1B

Connector Type:

Header

Pitch - Mating:

0.098" (2.50mm)

Number of Rows:

2

Number of Positions Loaded:

All

Shrouding:

Shrouded - 4 Wall

Termination:

Solder

Contact Length - Mating:

0.177" (4.50mm)

Overall Contact Length:

0.417" (10.60mm)

Contact Shape:

Square

Contact Finish Thickness - Mating:

-

Contact Material:

Brass

Features:

Keying Slot

Ingress Protection:

-

Insulation Color:

White

Voltage Rating:

250V

Contact Finish Thickness - Post:

-

Base Product Number:

DF1BZ

Manufacturer:

Hirose Electric Co Ltd

Product Status:

Active

Contact Type:

Male Pin

Number of Positions:

28

Row Spacing - Mating:

0.098" (2.50mm)

Style:

Board to Cable/Wire

Mounting Type:

Through Hole

Fastening Type:

Push-Pull

Contact Length - Post:

0.142" (3.60mm)

Insulation Height:

0.374" (9.50mm)

Contact Finish - Mating:

Tin

Contact Finish - Post:

Tin

Insulation Material:

Polyamide (PA), Nylon

Operating Temperature:

-35°C ~ 85°C

Material Flammability Rating:

UL94 V-0

Current Rating (Amps):

-

Mated Stacking Heights:

14mm

Applications:

-

Environmental & Export classification

RoHS Status:

Moisture Sensitivity Level (MSL):

Mar.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
APPLICABLE STANDARD									
RATING	OPERATING TEMPERATURE RANGE	-35 °C TO +85 °C(NOTE1)			STORAGE TEMPERATURE RANGE	-10 °C TO +60 °C			
	VOLTAGE	250 V AC			APPLICABLE CONNECTOR	DF1B-*DS-2.5RC			
	CURRENT	3 A							
SPECIFICATIONS									
ITEM		TEST METHOD			REQUIREMENTS			QT	AT
CONSTRUCTION									
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.			ACCORDING TO DRAWING.			X	X
MARKING		CONFIRMED VISUALLY.						X	X
ELECTRIC CHARACTERISTICS									
CONTACT RESISTANCE		100 mA (DC OR 1000 Hz).			30 mΩ MAX.			X	—
INSULATION RESISTANCE		500 V DC.			1000 MΩ MIN.			X	—
VOLTAGE PROOF		650 V AC FOR 1 min.			NO FLASHOVER OR BREAKDOWN.			X	—
MECHANICAL CHARACTERISTICS									
MECHANICAL OPERATION		30 TIMES INSERTIONS AND EXTRACTIONS.			① CONTACT RESISTANCE: 30 mΩ MAX. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.			X	—
VIBRATION		FREQUENCY 10 TO 55 Hz, SINGLE AMPLITUDE 0.75 mm, AT 2 h, FOR 3 DIRECTIONS.			① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.			X	—
SHOCK		490 m/s ² DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.			① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② CONTACT RESISTANCE: 30 mΩ MAX. ③ NO DAMAGE, CRACK OR LOOSENESS OF PARTS.			X	—
ENVIRONMENTAL CHARACTERISTICS									
RAPID CHANGE OF TEMPERATURE		TEMPERATURE -55→ 5 TO 35→+85→ 5 TO 35 °C TIME 30→ 5 MAX → 30→ 5 MAX min UNDER 5 CYCLES.			① CONTACT RESISTANCE: 30 mΩ MAX. ② INSULATION RESISTANCE: 1000 MΩ MIN. ③ NO DAMAGE, CRACK OR LOOSENESS OF PARTS.			X	—
DAMP HEAT (STEADY STATE)		EXPOSED AT 40 ± 2 °C, 90 ~ 95 %, 96 h.			① CONTACT RESISTANCE: 30 mΩ MAX. ② INSULATION RESISTANCE: 1000 MΩ MIN. ③ NO DAMAGE, CRACK OR LOOSENESS OF PARTS.			X	—
RESISTANCE TO SOLDERING HEAT		1) AUTOMATIC SOLDERING (FLOW) SOLDER TEMPERATURE, 260 °C FOR IMMERSION, DURATION, 5 sec. 2) MANUAL SOLDERING SOLDERING IRON TEMPERATURE : 300 °C, SOLDERING TIME : 3 sec. NO STRENGTH ON CONTACT.			NO DEFORMATION OF CASE OF EXCESSIVE LOOSENESS OF THE TERMINALS.			X	—
SOLDERABILITY		SOLDERED AT SOLDER TEMPERATURE, 235 °C FOR INSERTION DURATION, 5 s.			SOLDER SHALL COVER A MINIMUM OF 95 % OF THE SURFACE BEING IMMersed.			X	—
REMARKS					DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
NOTE1: INCLUDE THE TEMPERATURE RISING BY CURRENT.					F.Matsuki	H. Umehara	T. Miyazaki	J. Ono	
Unless otherwise specified, refer to JIS C 5402.					'04.03.25	04.07.25	04.03.25	04.03.25	
Note QT:Qualification Test AT:Assurance Test X:Applicable Test									
HRS HIROSE ELECTRIC CO., LTD.					SPECIFICATION SHEET			PART NO.	
					DF1BZ- * DP-2.5DSA				
CODE NO.(OLD)			DRAWING NO.		PART NO.			1/1	
CL			ELC4-303247-02		CL541				



OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.