PC81102NSZ Datasheet

https://www.DiGi-Electronics.com

DiGi Electronics Part Number	PC81102NSZ-DG
Manufacturer	Sharp Microelectronics
Manufacturer Product Number	PC81102NSZ
Description	OPTOISOLATOR 5KV TRANS 4DIP
Detailed Description	Optoisolator Transistor Output 5000Vrms 1 Channel 4-DIP

This model PC81102NSZ is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

Request a Quote

Datasheet Search

Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:	Manufacturer:
PC81102NSZ	Sharp Microelectronics
Series:	Product Status:
PC8110xNSZ	Obsolete
Number of Channels:	Voltage - Isolation:
1	5000Vrms
Current Transfer Ratio (Min):	Current Transfer Ratio (Max):
-	-
Turn On / Turn Off Time (Typ):	Rise / Fall Time (Typ):
2µs, 23µs	3µs, 2µs
Input Type:	Output Type:
DC	Transistor
Voltage - Output (Max):	Current - Output / Channel:
70V	30mA
Voltage - Forward (Vf) (Typ):	Current - DC Forward (If) (Max):
1.2V	50 mA
Vce Saturation (Max):	Operating Temperature:
350mV	-30°C ~ 100°C
Mounting Type:	Package / Case:
Through Hole	4-DIP (0.300", 7.62mm)
Supplier Device Package:	Base Product Number:
4-DIP	PC8110

Environmental & Export classification

RoHS Status:	Moisture Sensitivity Level (MSL):
RoHS non-compliant	Not Applicable
ECCN:	HTSUS:
EAR99	8541.49.8000

PC8110xNSZ Series

DIP 4pin
High Speed under High Load Resistance Photocoupler



■ Description

PC8110xNSZ Series contains an IRED optically coupled to a phototransistor built-in schottky barrier diode.

It is packaged in a 4-pin DIP, and SMT gullwing lead-form option.

Input-output isolation voltage(rms) is 5.0kV.

CTR is 50% to 400% at input current of 5mA.

■ Features

1. 4pin DIP package
2. Double transfer mold package (Ideal for Flow Soldering)
3. High speed response at turn-off time due to built-in schottky barrier diode (at saturation mode)
4. High isolation voltage between input and output ($V_{iso(rms)}$: 5kV)

■ Agency approvals/Compliance

1. Recognized by UL1577 (Double protection isolation), file No. E64380 (as model No. **PC8110**)
2. Package resin : UL flammability grade (94V-0)

■ Applications

1. Home appliances

Notice The content of data sheet is subject to change without prior notice.
In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

Sheet No.: D2-A03801EN
Date Sep. 30. 2003
© SHARP Corporation

■ Internal Connection Diagram



① Anode
③ Cathode
④ Emitter
⑤ Collector

■ Outline Dimensions

(Unit : mm)

1. Through-Hole [ex. **PC8110xNSZ**]

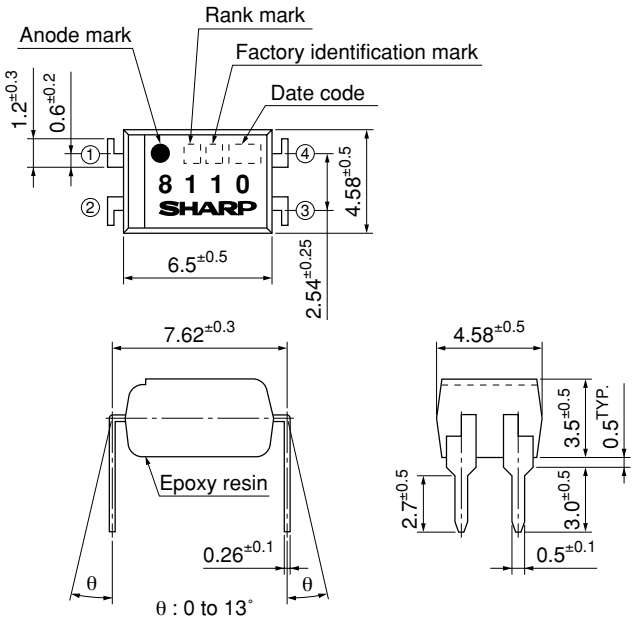

2. SMT Gullwing Lead-Form [ex. **PC8110xNIZ**]

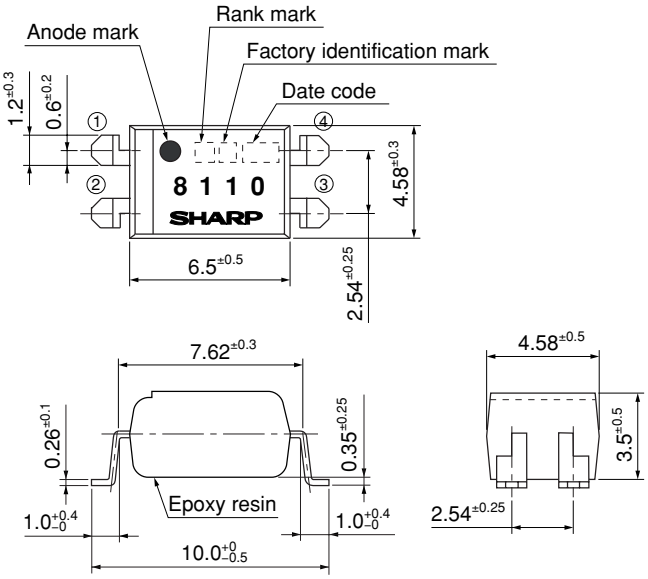

Product mass : approx. 0.21g

Date code (2 digit)

1st digit				2nd digit	
Year of production				Month of production	
A.D.	Mark	A.D	Mark	Month	Mark
1990	A	2002	P	January	1
1991	B	2003	R	February	2
1992	C	2004	S	March	3
1993	D	2005	T	April	4
1994	E	2006	U	May	5
1995	F	2007	V	June	6
1996	H	2008	W	July	7
1997	J	2009	X	August	8
1998	K	2010	A	September	9
1999	L	2011	B	October	O
2000	M	2012	C	November	N
2001	N	⋮	⋮	December	D

repeats in a 20 year cycle

Factory identification mark

Factory identification Mark	Country of origin
no mark	Japan
■	
◢	Indonesia
◸	Philippines
◥	China

* This factory marking is for identification purpose only.
Please contact the local SHARP sales representative to see the actural status of the production.

Rank mark

Refer to the Model Line-up table

■ Absolute Maximum Ratings

(T_a=25˚C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	*1 Peak forward current	I_{FM}	1.0	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V_{CEO}	70	V
	Emitter-collector voltage	V_{ECO}	0.1	V
	Collector current	I_C	30	mA
	Collector power dissipation	P_C	150	mW
Total power dissipation		P_{tot}	200	mW
*2 Isolation voltage		$V_{iso\ (rms)}$	5.0	kV
Operating temperature		T_{opr}	−30 to +100	˚C
Storage temperature		T_{stg}	−55 to +125	˚C
*3 Soldering temperature		T_{sol}	260	˚C

*1 Pulse width≤100μs, Duty ratio : 0.001
*2 40 to 60%RH, AC for 1 minute, f=60Hz
*3 For 10s

■ Electro-optical Characteristics

(T_a=25˚C)

Parameter				Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage			V_F	I_F=20mA	–	1.2	1.4	V
	Peak forward voltage			V_{FM}	I_{FM}=0.5A	–	–	3.0	V
	Reverse Current			I_R	V_R=4V	–	–	10	μA
	Terminal capacitance			C_t	V=0, f=1kHz	–	30	250	pF
Output	Collector dark current			I_{CEO}	V_{CE}=50V, I_F=0	–	–	100	nA
	*4 Collector-emitter breakdown voltage			BV_{CEO}	I_C=0.1mA, I_F=0	70	–	–	V
Transfer charac-teristics	Collector current			I_C	I_F=5mA, V_{CE}=5V	2.5	–	20	mA
	Collector-emitter saturation voltage			$V_{CE\ (sat)}$	I_F=20mA, I_C=1mA	–	0.15	0.35	V
	Isolation resistance			R_{ISO}	DC500V, 40 to 60%RH	5×10^{10}	10^{11}	–	Ω
	Floating capacitance			C_f	V=0, f=1MHz	–	0.6	1.0	pF
	Response time	Not saturated	Rise time	t_r	V_{CE}=2V, I_C=2mA, R_L=100Ω	–	3	20	μs
			Fall time	t_f		–	2	10	
		Saturated 1	Turn-on time	t_{on}	V_{CC}=5V, I_C=20mA, R_L=10kΩ	–	2	13	
			Storage time	t_s		–	9	50	
			Turn-off time	t_{off}		–	23	90	
		Saturated 2	Turn-on time	t_{on}	V_{CC}=5V, I_C=20mA, R_L=100kΩ	–	3	13	
			Storage time	t_s		–	10	50	
			Turn-off time	t_{off}		–	27	100	

*4 The collector-emitter voltage has negative resistance characteristics since this device has built-in base-emitter resistor. Therefore, please be careful not to provide the voltage that goes beyond absolute maximum ratings.

■ Model Line-up

Lead Form	Through-Hole	SMT Gullwing		Rank mark	I_C [mA] (I_F=5mA, V_{CE}=5V, T_a=25˚C)
Package	100pcs/sleeve	100pcs/sleeve	2000pcs/reel		
Model No.	**PC81100NSZ**	**PC81100NIZ**	**PC81100NIP**	with or without	2.5 to 20.0
	PC81101NSZ	**PC81101NIZ**	**PC81101NIP**	A	3.0 to 6.0
	PC81102NSZ	**PC81102NIZ**	**PC81102NIP**	B	5.0 to 10.0
	PC81103NSZ	**PC81103NIZ**	**PC81103NIP**	C	7.5 to 15.0
	PC81105NSZ	**PC81105NIZ**	**PC81105NIP**	A or B	3.0 to 10.0
	PC81106NSZ	**PC81106NIZ**	**PC81106NIP**	B or C	5.0 to 15.0
	PC81108NSZ	**PC81108NIZ**	**PC81108NIP**	A, B or C	3.0 to 15.0

Please contact a local SHARP sales representative to inquire about production status and Lead-Free options.

Fig.1 Forward Current vs. Ambient Temperature

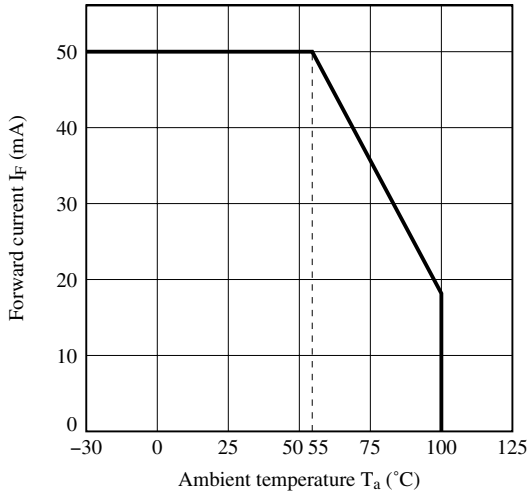

Fig.2 Diode Power Dissipation vs. Ambient Temperature

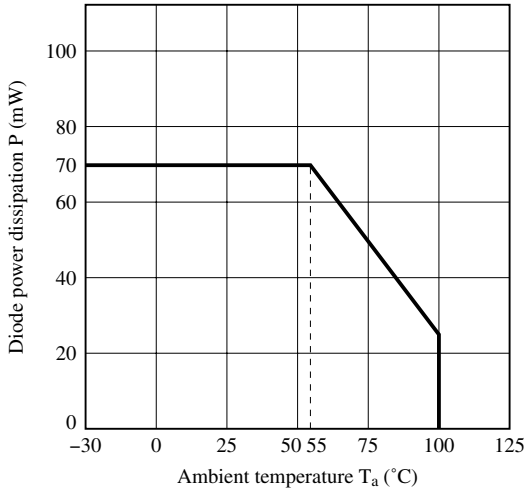

Fig.3 Collector Power Dissipation vs. Ambient Temperature

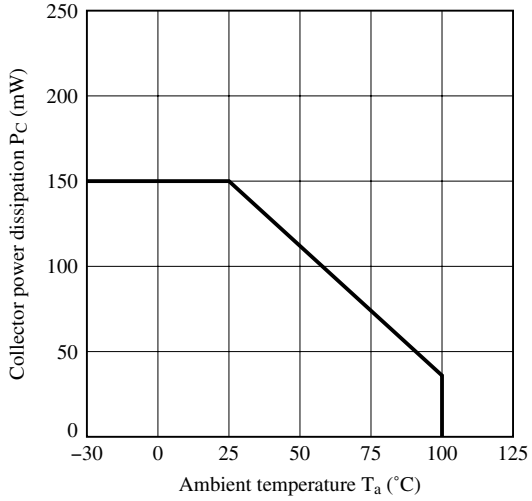

Fig.4 Total Power Dissipation vs. Ambient Temperature

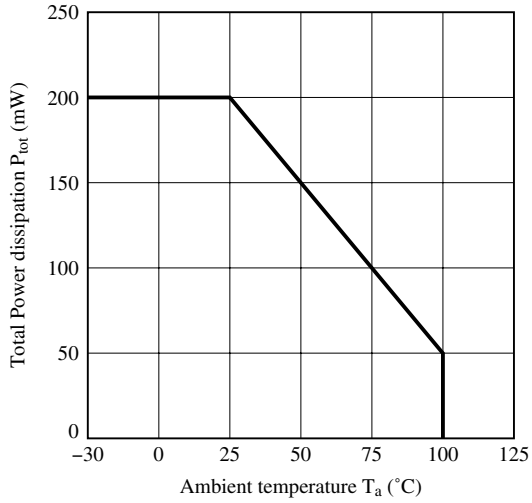

Fig.5 Peak Forward Current vs. Duty Ratio

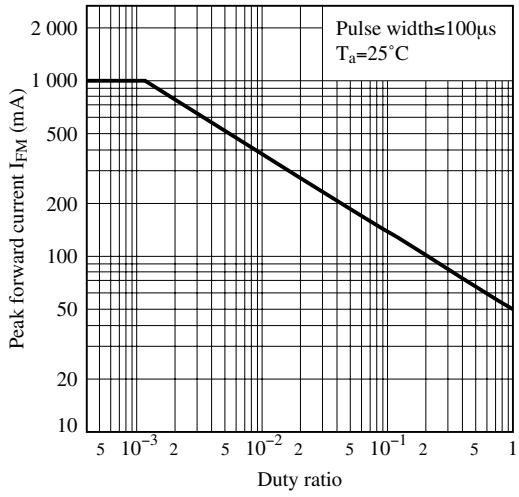

Fig.6 Forward Current vs. Forward Voltage

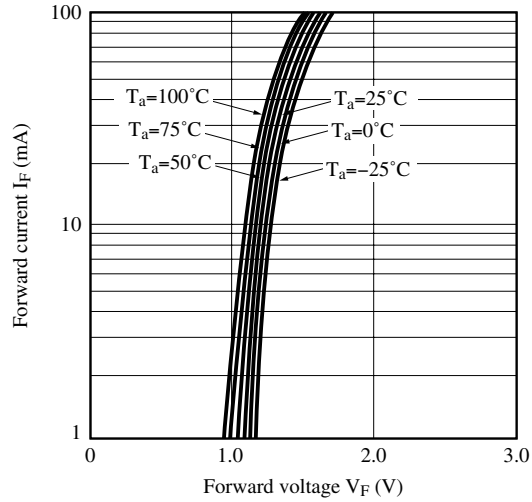

Fig.7 Current Transfer Ratio vs. Forward Current

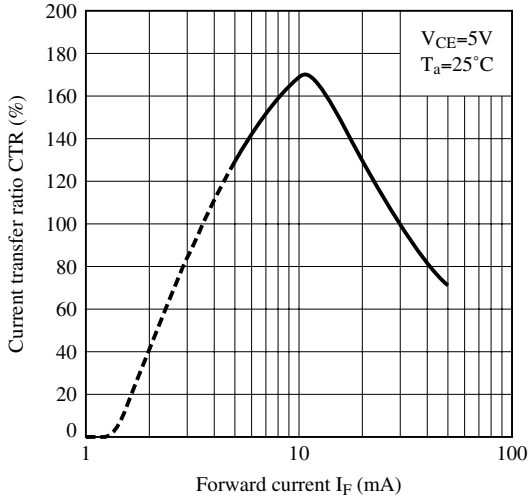

Fig.8 Collector Current vs. Collector-emitter Voltage

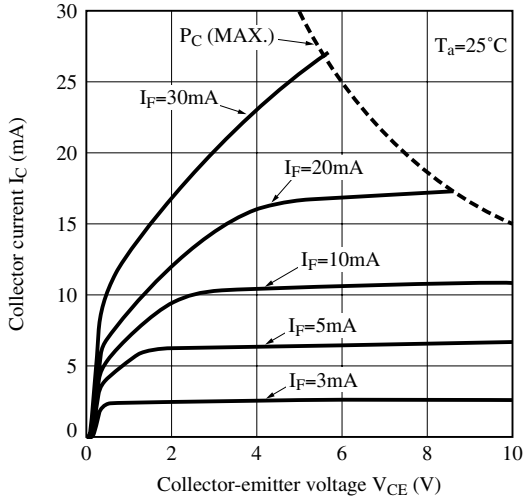

Fig.9 Relative Current Transfer Ratio vs. Ambient Temperature

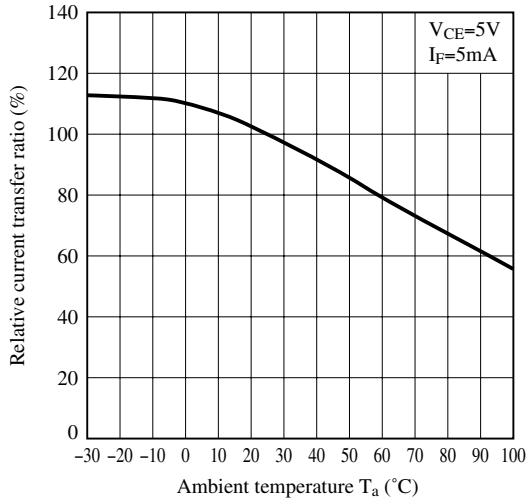

Fig.10 Collector - emitter Saturation Voltage vs. Ambient Temperature

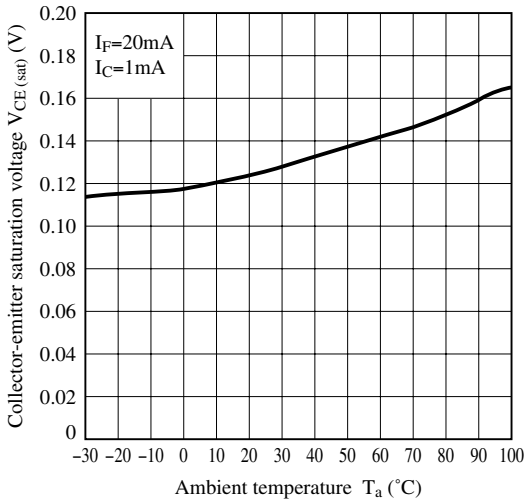

Fig.11 Collector Dark Current vs. Ambient Temperature

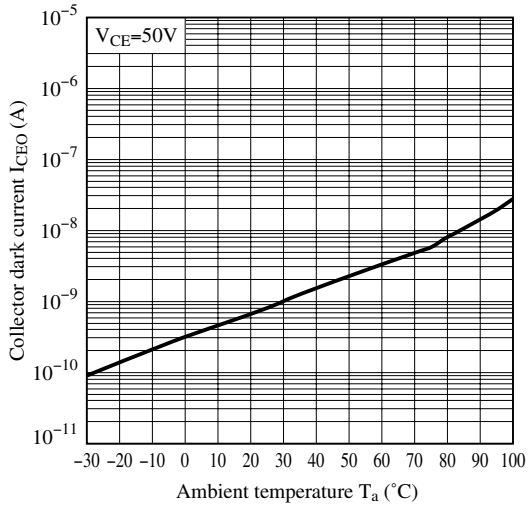

Fig.12 Response Time vs. Load Resistance (saturation region)

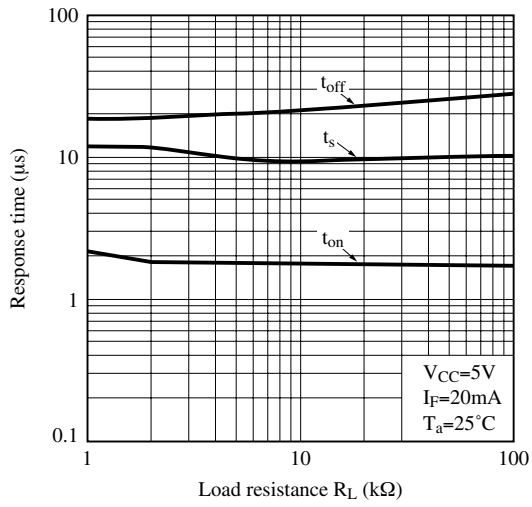

Fig.13 Response Time vs. Load Resistance (active region)

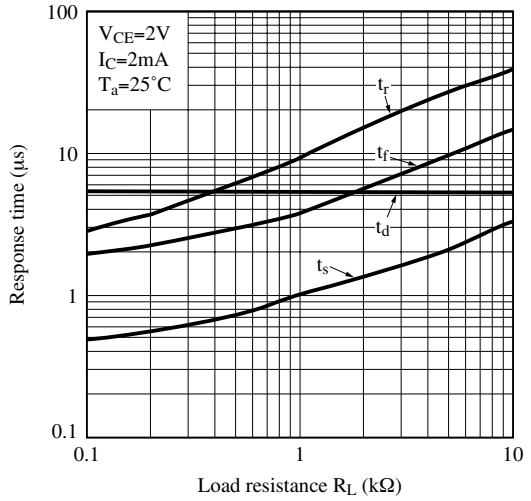

Fig.14 Test Circuit for Response Time

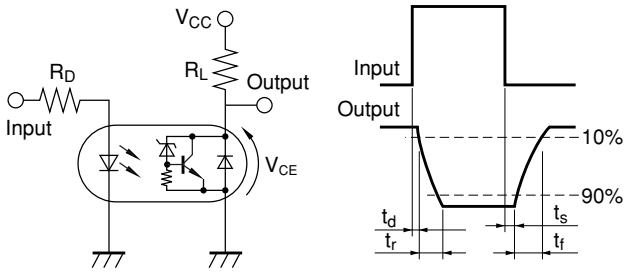

Please refer to the conditions in Fig.12 and Fig.13

Fig.15 Frequency Response

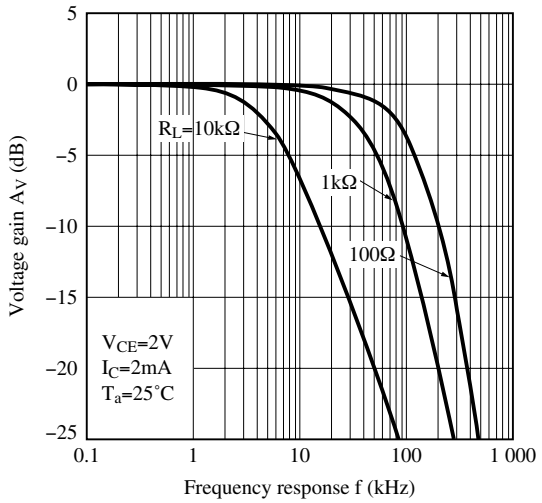

Fig.16 Collector-emitter Saturation Voltage vs. Forward Current

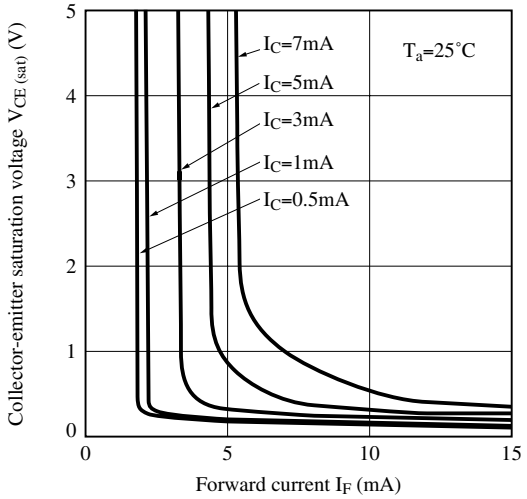

Remarks : Please be aware that all data in the graph are just for reference and not for guarantee.

■ Design Considerations

● Design guide

While operating at I_F<5.0mA, CTR variation may increase.
Please make design considering this fact.

This product is not designed against irradiation and incorporates non-coherent IRED.

The collector-emitter voltage has negative resistance characteristics since this device has built-in base-emitter resistor.
Therefore, please be careful not to provide the voltage that goes beyond absolute maximum ratings.

● Degradation

In general, the emission of the IRED used in photocouplers will degrade over time.
In the case of long term operation, please take the general IRED degradation (50% degradation over 5years) into the design consideration.

● Recommended Foot Print (reference)

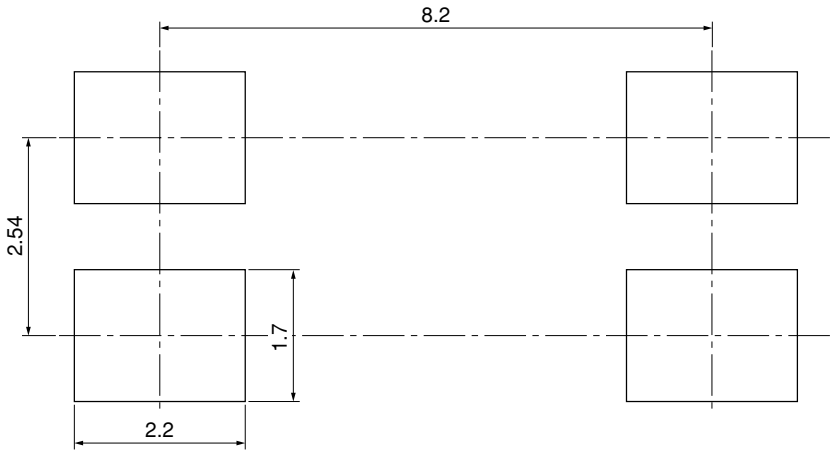

(Unit : mm)

☆ For additional design assistance, please review our corresponding Optoelectronic Application Notes.

■ Manufacturing Guidelines

● Soldering Method

Reflow Soldering:

Reflow soldering should follow the temperature profile shown below.
Soldering should not exceed the curve of temperature profile and time.
Please don't solder more than twice.

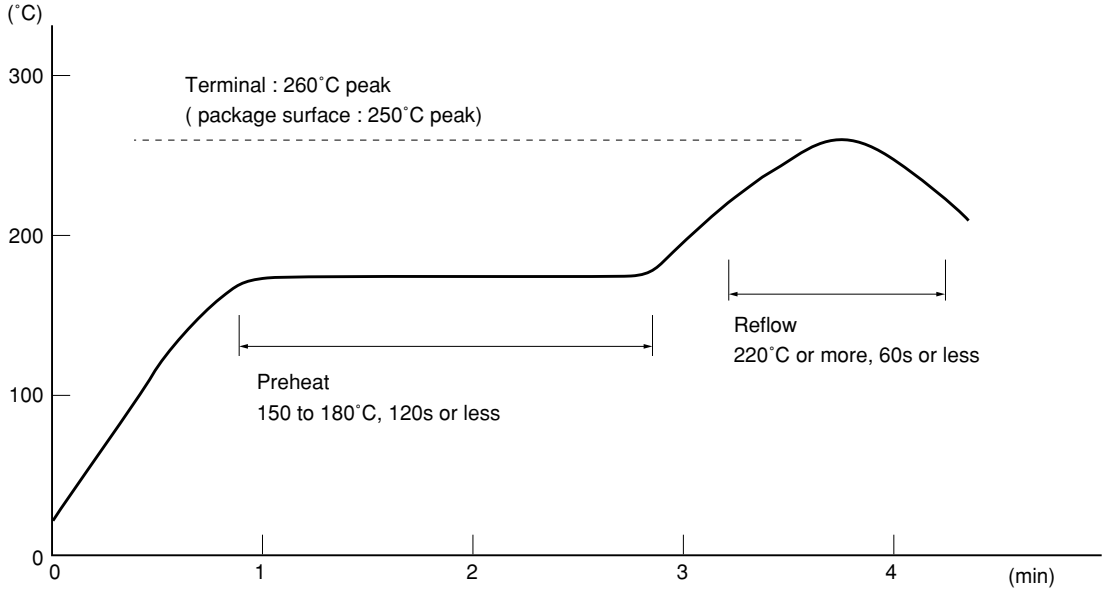

Flow Soldering :

Due to SHARP's double transfer mold construction submersion in flow solder bath is allowed under the below listed guidelines.

Flow soldering should be completed below 270˚C and within 10s.
Preheating is within the bounds of 100 to 150˚C and 30 to 80s.
Please don't solder more than twice.

Hand soldering

Hand soldering should be completed within 3s when the point of solder iron is below 400˚C.
Please don't solder more than twice.

Other notices

Please test the soldering method in actual condition and make sure the soldering works fine, since the impact on the junction between the device and PCB varies depending on the tooling and soldering conditions.

● Cleaning instructions

Solvent cleaning:

Solvent temperature should be 45˚C or below Immersion time should be 3minutes or less

Ultrasonic cleaning:

The impact on the device varies depending on the size of the cleaning bath, ultrasonic output, cleaning time, size of PCB and mounting method of the device.
Therefore, please make sure the device withstands the ultrasonic cleaning in actual conditions in advance of mass production.

Recommended solvent materials:

Ethyl alcohol, Methyl alcohol and Isopropyl alcohol
In case the other type of solvent materials are intended to be used, please make sure they work fine in actual using conditions since some materials may erode the packaging resin.

● Presence of ODC

This product shall not contain the following materials.
And they are not used in the production process for this device.
Regulation substances:CFCs, Halon, Carbon tetrachloride, 1.1.1-Trichloroethane (Methylchloroform)
Specific brominated flame retardants such as the PBBOs and PBBs are not used in this product at all.

■ Package specification

● Sleeve package

Package materials

Sleeve : HIPS (with anti-static material)

Stopper : Styrene-Elastomer

Package method

MAX. 100pcs of products shall be packaged in a sleeve. Both ends shall be closed by tabbed and tabless stoppers.

The product shall be arranged in the sleeve with its anode mark on the tabless stopper side.

MAX. 20 sleeves in one case.

Sleeve outline dimensions

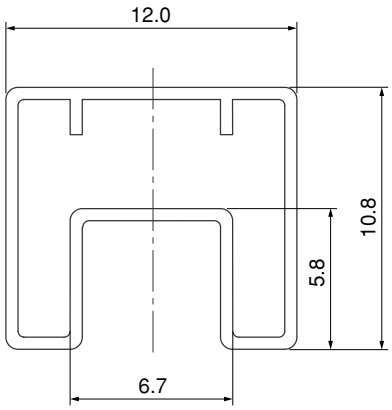

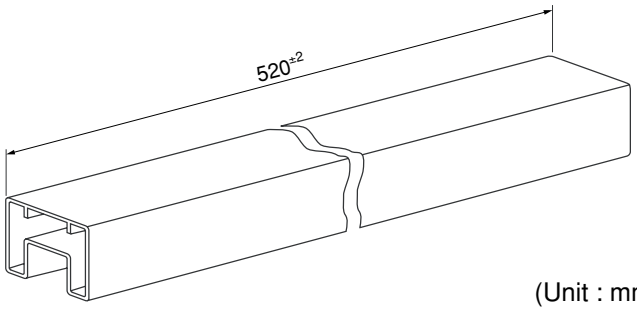

(Unit : mm)

● Tape and Reel package

Package materials

Carrier tape : PS

Cover tape : PET (three layer system)

Reel : PS

Carrier tape structure and Dimensions

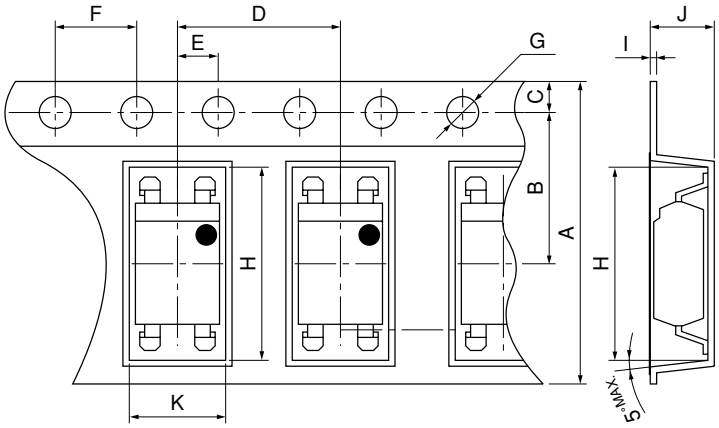

Dimensions List (Unit : mm)

A	B	C	D	E	F	G
$16.0^{\pm0.3}$	$7.5^{\pm0.1}$	$1.75^{\pm0.1}$	$8.0^{\pm0.1}$	$2.0^{\pm0.1}$	$4.0^{\pm0.1}$	$\phi1.5^{+0.1}_{-0}$
H	I	J	K			
$10.4^{\pm0.1}$	$0.4^{\pm0.05}$	$4.2^{\pm0.1}$	$5.1^{\pm0.1}$			

Reel structure and Dimensions

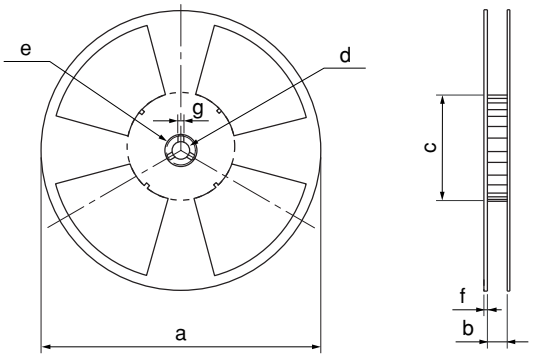

Dimensions List (Unit : mm)

a	b	c	d
330	$17.5^{\pm1.5}$	$100^{\pm1.0}$	$13^{\pm0.5}$
e	f	g	
$23^{\pm1.0}$	$2.0^{\pm0.5}$	$2.0^{\pm0.5}$	

Direction of product insertion

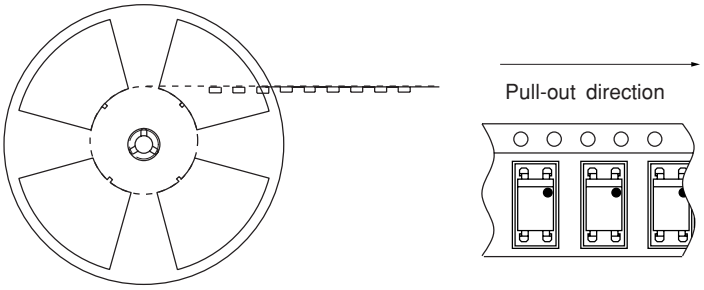

[Packing : 2 000pcs/reel]

■ Important Notices

· The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.

· Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.

· Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
(i) The devices in this publication are designed for use in general electronic equipment designs such as:
--- Personal computers
--- Office automation equipment
--- Telecommunication equipment [terminal]
--- Test and measurement equipment
--- Industrial control
--- Audio visual equipment
--- Consumer electronics
(ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
--- Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
--- Traffic signals
--- Gas leakage sensor breakers
--- Alarm equipment
--- Various safety devices, etc.
(iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
--- Space applications
--- Telecommunication equipment [trunk lines]
--- Nuclear power control equipment
--- Medical and other life support equipment (e.g., scuba).

· If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Law of Japan, it is necessary to obtain approval to export such SHARP devices.

· This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.

· Contact and consult with a SHARP representative if there are any questions about the contents of this publication.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we striciy control the quality of products and services. Welcome your RFQ to Email: Info@DiGi-Electronics.com

Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.