

HCB05-102-RC Datasheet

www.digi-electronics.com



DiGi Electronics Part Number	HCB05-102-RC-DG
Manufacturer	Allied Components International
Manufacturer Product Number	HCB05-102-RC
Description	FERRITE BEAD 1K OHM 0603 1LN
Detailed Description	1 kOhms @ 100 MHz 1 Power Line Ferrite Bead 0603 (1608 Metric) 800mA 20mOhm

<https://www.DiGi-Electronics.com>

This model HCB05-102-RC is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

HCB05-102-RC

Series:

-

Filter Type:

Power Line

Impedance @ Frequency:

1 kOhms @ 100 MHz

DC Resistance (DCR) (Max):

20mOhm

Operating Temperature:

-55°C ~ 125°C

Mounting Type:

Surface Mount

Size / Dimension:

0.063" L x 0.031" W (1.60mm x 0.80mm)

Manufacturer:

Allied Components International

Product Status:

Active

Number of Lines:

1

Current Rating (Max):

800mA

Ratings:

-

Package / Case:

0603 (1608 Metric)

Height (Max):

0.039" (1.00mm)

Features:

-

Environmental & Export classification

RoHS Status:

RoHS Compliant

REACH Status:

REACH info available upon request

HTSUS:

8548.00.0000

Moisture Sensitivity Level (MSL):

1 (Unlimited)


ECCN:

EAR99



High Current Beads

HCB05

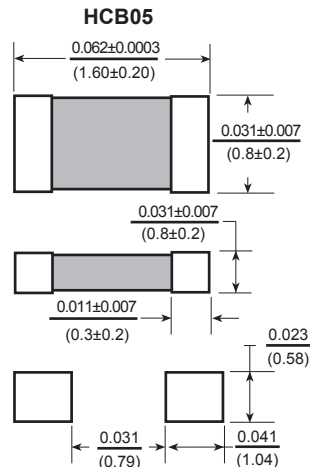

Dimensions: Inches (mm)



Features

- 0603 Surface mount EMI suppression components
- Nickel barrier termination for excellent resistance to solder heat
- High current capacity
- Wide range of impedance values
- Multi layer technology
- Low DCR
- Flow and reflow soldering

Electrical

Impedance Range: HCB05 10Ω to 1500Ω


Tolerance: 25% over entire range

Operating Temp: -55°C ~ +125°C

Storage Temp: Under 25°C at 40~60% Humidity

Rate Current: Based on temp rise not to exceed 30°C

Rate current is derated as indicated below based on operating temp.

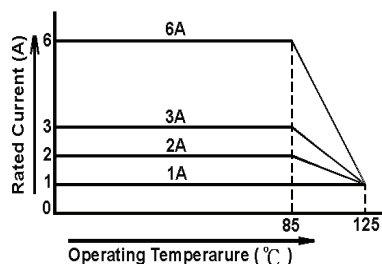

Resistance to Solder Heat

Pre-Heat 150°C, 1 minute

Solder Composition: Sn/Ag3.0/Cu0.5

Solder Temp: 260±5°C for 10sec ±1 sec.

Minimum of 75% of Electrode covered with new solder.

Impedance within 30% of initial value.

Allied Part Number	Impedance (Ω) @ 100MHz ±25%	DCR (Ω Max)	Rated Current (mA)
HCB05-100-RC	10	0.02	4000
HCB05-110-RC	11	0.02	4000
HCB05-190-RC	19	0.03	3000
HCB05-200-RC	20	0.03	3000
HCB05-220-RC	22	0.03	3000
HCB05-250-RC	25	0.03	3000
HCB05-300-RC	30	0.03	3000
HCB05-310-RC	31	0.035	3000
HCB05-400-RC	40	0.035	3000
HCB05-470-RC	47	0.04	3000
HCB05-500-RC	50	0.04	3000
HCB05-560-RC	56	0.04	3000
HCB05-600-RC	60	0.04	3000
HCB05-680-RC	68	0.05	2500
HCB05-700-RC	70	0.05	2500
HCB05-750-RC	75	0.05	2500
HCB05-800-RC	80	0.05	2500
HCB05-900-RC	90	0.05	2500
HCB05-101-RC	100	0.05	2500
HCB05-121-RC	120	0.08	2500
HCB05-151-RC	150	0.085	2000
HCB05-181-RC	180	0.09	2000
HCB05-201-RC	200	0.095	2000
HCB05-221-RC	220	0.1	2000
HCB05-241-RC	240	0.12	1500
HCB05-301-RC	300	0.12	1500
HCB05-331-RC	330	0.12	1500
HCB05-401-RC	400	0.12	1500
HCB05-471-RC	470	0.15	1500
HCB05-501-RC	500	0.15	1200
HCB05-601-RC	600	0.2	1000
HCB05-751-RC	750	0.25	800
HCB05-102-RC	1000	0.25	800
HCB05-152-RC	1500	0.4	500

All specifications subject to change without notice.

Test Equipment

(Z): HP4291A RF Impedance/Material Analyzer

(RDC): Chen Hwa 502BC

Physical

Packaging: 4000pcs per 7 inch reel.

Marking: None

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.