

# PQ05RD21 Datasheet



DiGi Electronics Part Number	PQ05RD21-DG
Manufacturer	<a href="#">Sharp Microelectronics</a>
Manufacturer Product Number	PQ05RD21
Description	IC REG LINEAR 5V 2A TO220-4
Detailed Description	Linear Voltage Regulator IC Positive Fixed 1 Output 2A TO-220-4

<https://www.DiGi-Electronics.com>

This model PQ05RD21 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

PQ05RD21

Series:

-

Output Configuration:

Positive

Number of Regulators:

1

Voltage - Output (Min/Fixed):

5V

Voltage Dropout (Max):

0.5V @ 2A

Current - Quiescent (Iq):

10 mA

Control Features:

Enable

Operating Temperature:

-20°C ~ 80°C

Package / Case:

TO-220-4

Base Product Number:

PQ05

Manufacturer:

Sharp Microelectronics

Product Status:

Obsolete

Output Type:

Fixed

Voltage - Input (Max):

20V

Voltage - Output (Max):

-

Current - Output:

2A

PSRR:

55dB (120Hz)

Protection Features:

Over Current, Over Temperature

Mounting Type:

Through Hole

Supplier Device Package:

TO-220-4

## Environmental & Export classification

RoHS Status:

RoHS non-compliant

ECCN:

EAR99

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8542.39.0001

# PQ05RD21 Series/PQ3RD23

2.0A Output Type Low Power-Loss Voltage Regulator

## Features

- Low power-loss (Dropout voltage: MAX 0.5V at  $I_o=2.0A$ )
- 2.0A output type
- Compact resin package (equivalent to TO-220)
- Available 3.3V/5V/9V/12V output type
- Output voltage precision:  $\pm 3.0\%$
- Built-in ON/OFF control function
- Built in overcurrent, overheat protection functions, ASO protection circuit.
- Lead forming type is also available.

## Applications


- Power supplies for various electronic equipment such as AV, OA equipment

## Model Line-ups

	2.0A output
3.3V output	PQ3RD23
5.0V output	PQ05RD21
9.0V output	PQ09RD21
12.0V output	PQ12RD21

## Outline Dimensions

(Unit : mm)

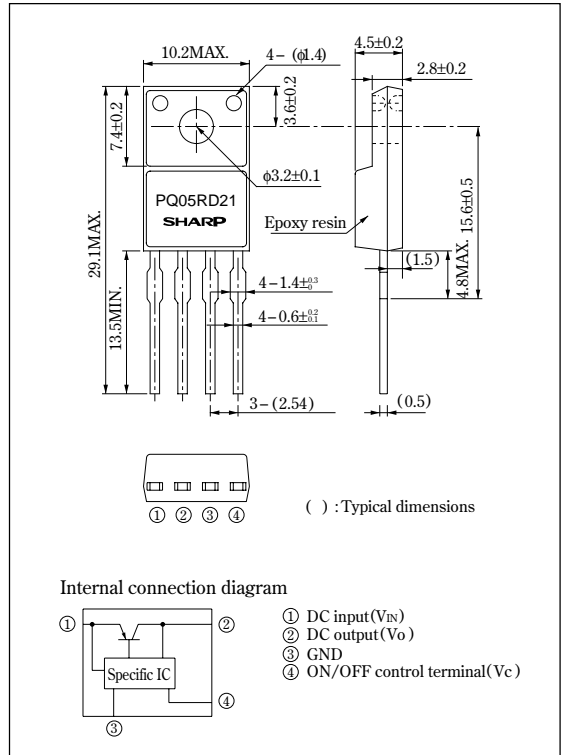

( $T_a=25^\circ C$ )

Parameter	Symbol	Rating	Unit
*1 Input voltage	$V_{IN}$	20	V
*1 ON/OFF control terminal voltage	$V_c$	20	V
Output current	$I_o$	2.0	A
	$P_{D1}$	1.4	W
*2 Power dissipation	$P_{D2}$	15	W
	$T_j$	150	$^\circ C$
*3 Junction temperature	$T_{opr}$	-20 to +80	$^\circ C$
	$T_{stg}$	-40 to +150	$^\circ C$
	$T_{sol}$	260 (For 10s)	$^\circ C$

\*1 All are open except GND and applicable terminals.

\*2  $P_{D1}$ : No heat sink,  $P_{D2}$ : With infinite heat sink

\*3 Overheat protection may operate at  $125 \leq T_j \leq 150^\circ C$ .

• Please refer to the chapter " Handling Precautions ".

**SHARP**

Notice In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.  
 Internet Internet address for Electronic Components Group <http://sharp-world.com/ecg/>

Electrical Characteristics

(Unless otherwise specified,  $I_o=1.0A$ , #4,  $T_a=25^\circ C$ )

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Output voltage	$V_o$	#4	PQ3RD23	3.201	3.3	3.399	V
			PQ05RD21	4.85	5.0	5.15	
			PQ09RD21	8.73	9.0	9.27	
			PQ12RD21	11.64	12.0	12.36	
Load regulation	$Reg_L$	$I_o=5mA$ to 2.0A, #4	—	0.1	2.0	%	
Line regulation	$Reg_I$	#5, $I_o=5mA$	PQ3RD23	—	0.1	2.5	%
			PQ05RD21 series	—	0.5	2.5	
Temperature coefficient of output voltage	$T_C V_o$	$T_j=0$ to $125^\circ C$ , $I_o=5mA$	—	$\pm 0.02$	—	%/ $^\circ C$	
Ripple rejection	RR	Refer to Fig.2	45	55	—	dB	
Dropout voltage	$V_{i-o}$	#6, $I_o=2A$	—	—	0.5	V	
#7 ON-state voltage for control	$V_C(ON)$	#4	2.0	—	—	V	
ON-state current for control	$I_C(ON)$	$V_C=2.7V$ , #4	—	—	20	$\mu A$	
OFF-state voltage for control	$V_C(OFF)$	#4	—	—	0.8	V	
OFF-state current for control	$I_C(OFF)$	$V_C=0.4V$ , #4	—	—	-0.4	mA	
Quiescent current	$I_q$	$I_o=0A$ , #4	—	—	10	mA	

#4 PQ3RD23: $V_{IN}=5V$ , PQ05RD21: $V_{IN}=7V$ , PQ09RD21: $V_{IN}=11V$ , PQ12RD21:  $V_{IN}=14V$

#5 PQ3RD23: $V_{IN}=4$  to 10V, PQ05RD21: $V_{IN}=6$  to 12V, PQ09RD21: $V_{IN}=10$  to 16V, PQ12RD21:  $V_{IN}=13$  to 19V

#6 Input voltage shall be the value when output voltage is 95% in comparison with the initial value. PQ3RD23: $V_{IN}=3.7V$

#7 In case of opening control terminal ④, output voltage turns on.

Fig. 1 Test Circuit



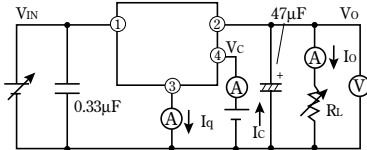


Fig. 2 Test Circuit of Ripple Rejection

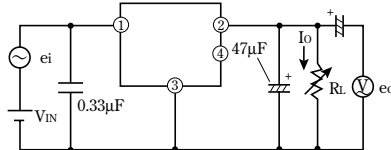


$f=120Hz$  (sine wave)  
 $e_i(rms)=0.5V$   
 $V_{IN}=5V$  (PQ3RD23)  
 7V (PQ05RD21)  
 11V (PQ09RD21)  
 14V (PQ12RD21)  
 $I_o=0.5A$   
 $RR=20 \log (e_i(rms)/e_o(rms))$

Fig. 3 Power Dissipation vs. Ambient Temperature

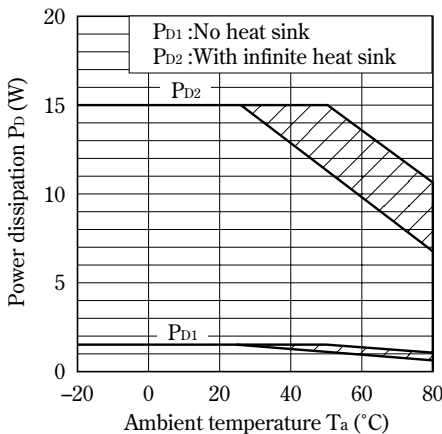


Note) Oblique line portion : Overheat protection may operate in this area.


Fig. 4 Overcurrent Protection Characteristics (Typical Value) (PQ3RD23)

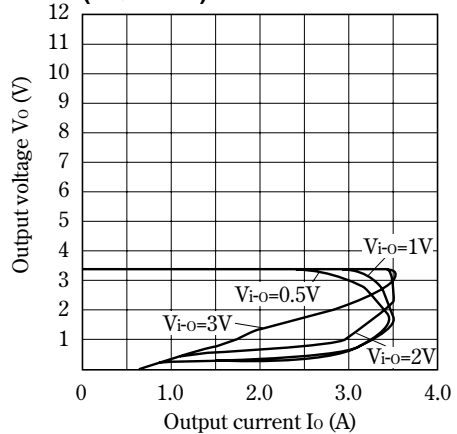


**Fig. 5 Overcurrent Protection Characteristics (Typical Value) (PQ05RD21)**

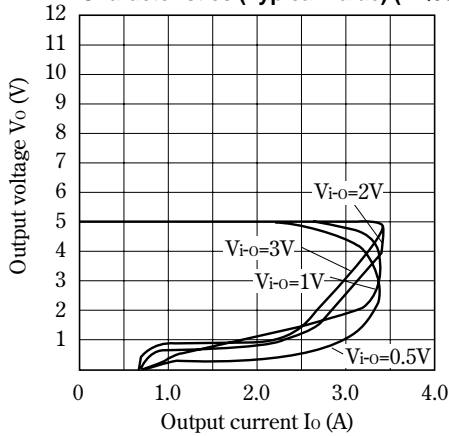


**Fig. 6 Overcurrent Protection Characteristics (Typical Value) (PQ09RD21)**

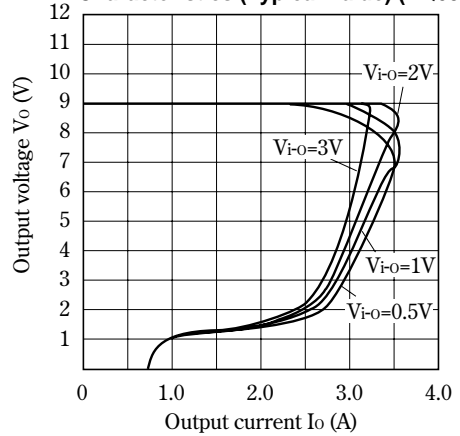


**Fig. 7 Overcurrent Protection Characteristics (Typical Value) (PQ12RD21)**

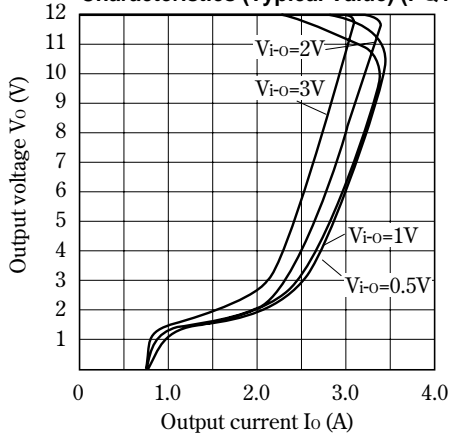


**Fig. 8 Output Voltage Deviation vs. Junction Temperature (PQ3RD23)**

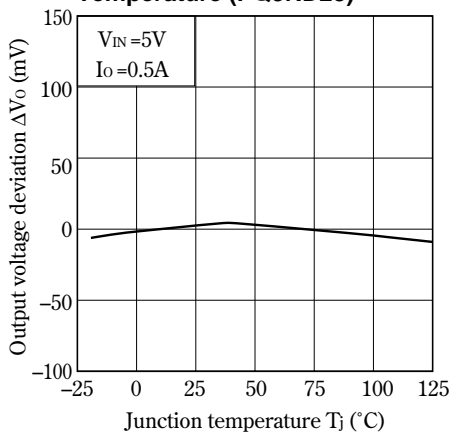


**Fig. 9 Output Voltage Deviation vs. Junction Temperature (PQ05RD21)**

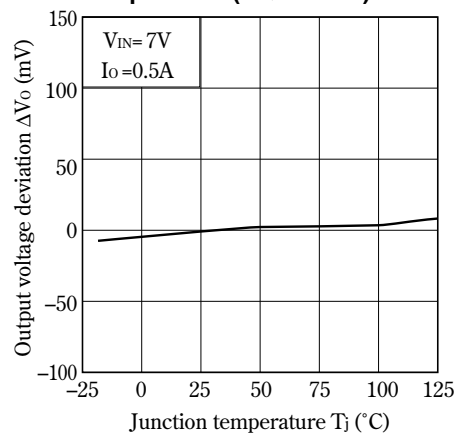


**Fig.10 Output Voltage Deviation vs. Junction Temperature (PQ09RD21)**

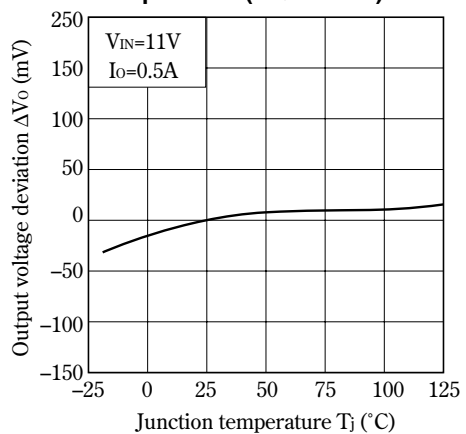


**Fig.11 Output Voltage Deviation vs. Junction Temperature (PQ12RD21)**

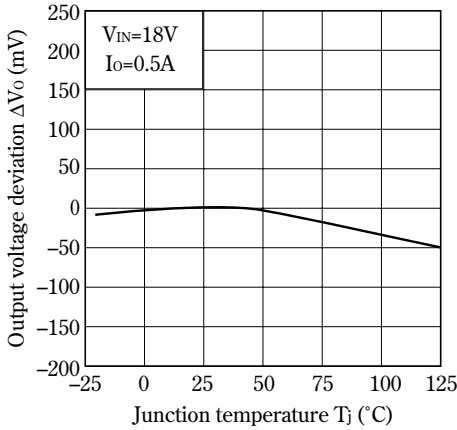


**Fig.12 Output Voltage vs. Input Voltage (PQ3RD23)**

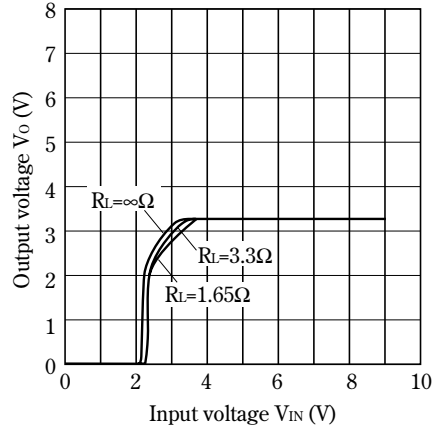


**Fig.13 Output Voltage vs. Input Voltage (PQ05RD21)**

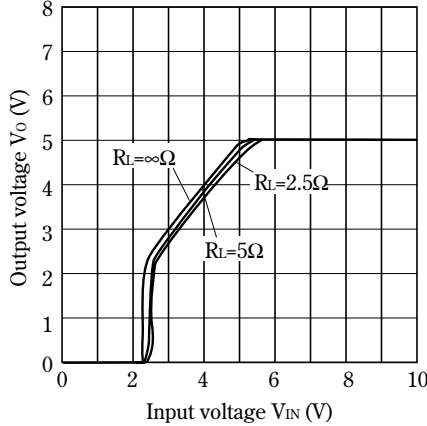


**Fig.14 Output Voltage vs. Input Voltage (PQ09RD21)**

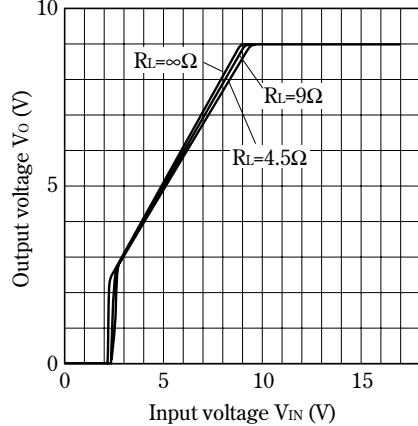


**Fig.15 Output Voltage vs. Input Voltage (PQ12RD21)**

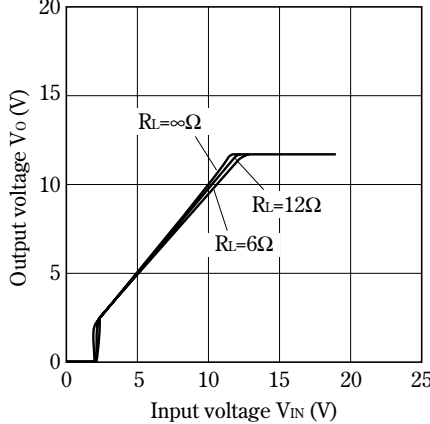


**Fig.16 Circuit Operating Current vs. Input Voltage (PQ3RD23)**

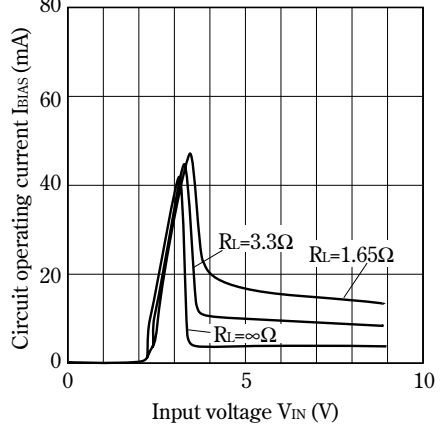


**Fig.17 Circuit Operating Current vs. Input Voltage (PQ05RD21)**

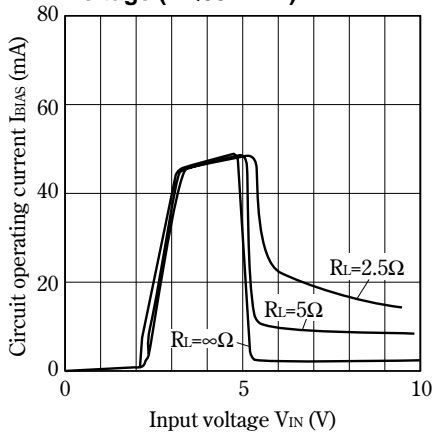


**Fig.18 Circuit Operating Current vs. Input Voltage (PQ09RD21)**

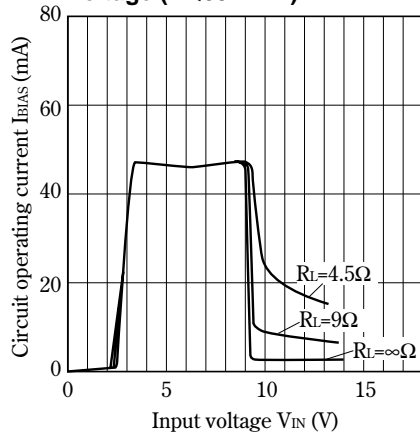


**Fig.19 Circuit Operating Current vs. Input Voltage (PQ12RD21)**

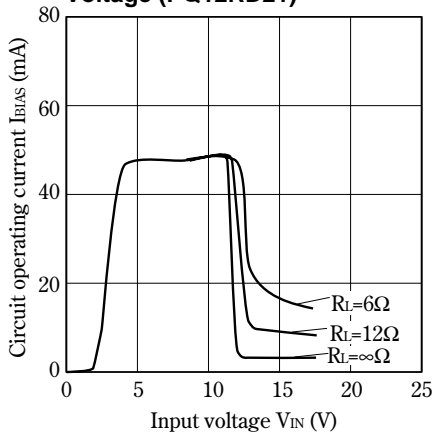


**Fig.20 Dropout Voltage vs. Junction Temperature**

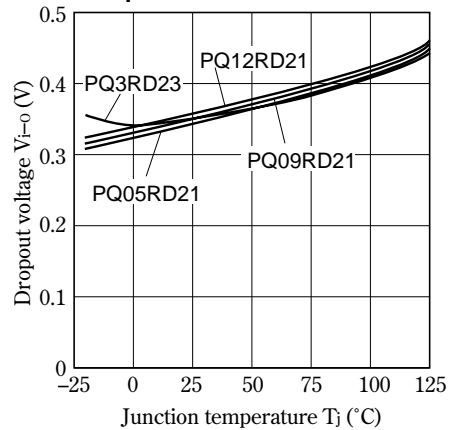


**Fig.21 Quiescent Current vs. Junction Temperature**

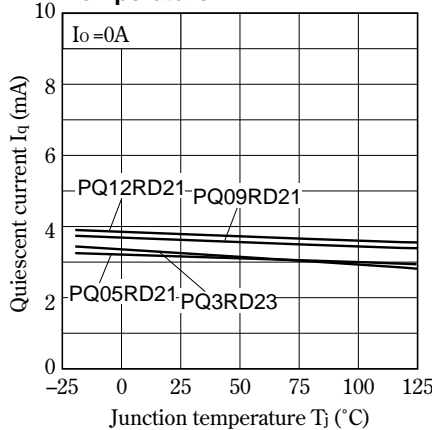

**Fig.22 Ripple Rejection vs. Input Ripple Frequency**

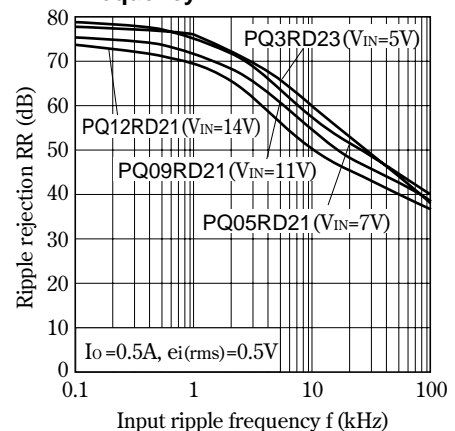

## ■ ON/OFF Operation

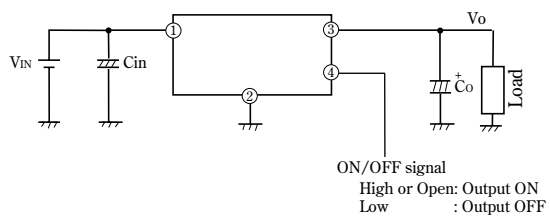

## NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
  - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
    - Personal computers
    - Office automation equipment
    - Telecommunication equipment [terminal]
    - Test and measurement equipment
    - Industrial control
    - Audio visual equipment
    - Consumer electronics
  - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
    - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
    - Traffic signals
    - Gas leakage sensor breakers
    - Alarm equipment
    - Various safety devices, etc.
  - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
    - Space applications
    - Telecommunication equipment [trunk lines]
    - Nuclear power control equipment
    - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.