


SPSX331M0ER-4 Datasheet

www.digi-electronics.com

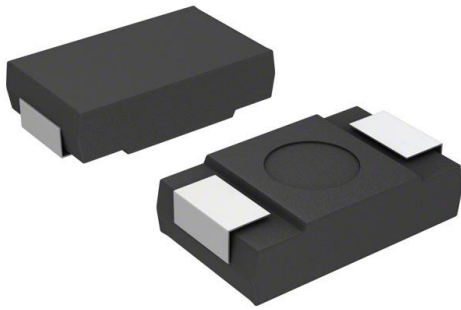

<https://www.DiGi-Electronics.com>

| | |
|------------------------------|---|
| DiGi Electronics Part Number | SPSX331M0ER-4-DG |
| Manufacturer | Cornell Dubilier Electronics (CDE) |
| Manufacturer Product Number | SPSX331M0ER-4 |
| Description | CAP ALUM POLY 330UF 20% 2.5V SMD |
| Detailed Description | 330 μ F 2.5 V Aluminum - Polymer Capacitors 2917 (7343 Metric) 4.5mOhm 1000 Hrs @ 105°C |

This model SPSX331M0ER-4 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

SPSX331M0ER-4

Series:

SPSX

Type:

Polymer

Tolerance:

±20%

ESR (Equivalent Series Resistance):

4.5mOhm

Operating Temperature:

-40°C ~ 105°C

Applications:

General Purpose

Lead Spacing:

-

Height - Seated (Max):

0.083" (2.10mm)

Mounting Type:

Surface Mount

Manufacturer:

Cornell Dubilier Electronics (CDE)

Product Status:

Obsolete

Capacitance:

330 µF

Voltage - Rated:

2.5 V

Lifetime @ Temp.:

1000 Hrs @ 105°C

Ratings:

-

Ripple Current @ High Frequency:

4 A @ 100 kHz

Size / Dimension:

0.287" L x 0.169" W (7.30mm x 4.30mm)

Surface Mount Land Size:

-

Package / Case:

2917 (7343 Metric)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

ECCN:

EAR99

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8532.22.0020

Type SPSX Solid Polymer Aluminum SMT Capacitors



The solid polymer SPSX aluminum capacitor is an ideal choice for audio/visual equipment, home appliances, computers, measuring equipment and industrial robots. Like the SPCX, the SPSX is a compact component. But SPSX offers a much lower ESR and a higher ripple current rating than the SPCX. The SPSX is a green product and RoHS compliant.



Complies with the EU Directive 2002/95/EC requirement restricting the use of Lead (Pb), Mercury (Hg), Cadmium (Cd), Hexavalent chromium (Cr(VI)), PolyBrominated Biphenyls (PBB) and PolyBrominated Diphenyl Ethers (PBDE).

Highlights

- A low-profile height of 1.9 mm
- Offered on tape and reel
- Can withstand 260 °C reflow for 10 s
- 4.5 - 9 mΩ ESR @ 100 kHz
- A great value in a small package

Specifications

Operating Temperature Range: -40 °C to +105 °C

Capacitance Range: 82 μF to 560 μF

Operating Working Range: 2.0, 2.5, 4.0, 6.3 Vdc

Capacitance Tolerance: ±20 % (120 Hz @ 20 °C)

Surge Voltage:

| | | | | |
|-------|-----|-----|-----|-----|
| Vdc | 2.0 | 2.5 | 4.0 | 6.3 |
| Surge | 2.5 | 3.1 | 5.0 | 8.0 |

Rated Ripple Current: See ratings table

Life Test:

Apply rated voltage at +105 °C ±2 °C for 1000 h

- * Leakage current: ≤ ratings table values
- * Capacitance: ±10% of initial measured value
- * DF: ≤ ratings table values
- * Appearance: No abnormal change to occur

Moisture Resistance:

+60 °C ±2 °C @ 90% RH; rated voltage for 500 h

- * Leakage current: ≤ rating table values
- * Capacitance: +70%, -20% (2V, 2.5V)
+60%, -20% (4V)
+50%, -20% (6.3V)
of initial measured value
- * DF: ≤200% of initial specified value
- * Appearance: No abnormal change to occur

Shelf Life Test:

+105 °C ±2 °C for 500 h

- Leakage current: ≤ rating table values
- Capacitance: ±10% of initial measured value
- DF: ≤ ratings table values
- Appearance: No abnormal change to occur

Surge Test:

Test temperature is +15 °C to +35 °C in series with a 1000 Ω resistor with the surge voltage applied for 1000 cycles of 30±5 s (ON) and 5 min 30 s (OFF)

- Leakage current: I ≤ 0.1CV
- Capacitance: ±10% of initial measured value
- DF: ≤ the values in the ratings table
- Appearance: No abnormal change to occur


Vibration:

10 Hz to 2000 Hz to 10 Hz frequency applied one cycle per 20 min at a total amplitude of 1.5 mm. Direction and duration of vibration will be 2 h each in the X,Y and Z planes for total of 6 h with the capacitor soldered in place.

- Appearance; No abnormal change to occur.
- Capacitance: Measured value to be stabilized during test, when measured several times within 30 min before completion of test.

Type SPSX Solid Polymer Aluminum SMT Capacitors


Outline Drawings

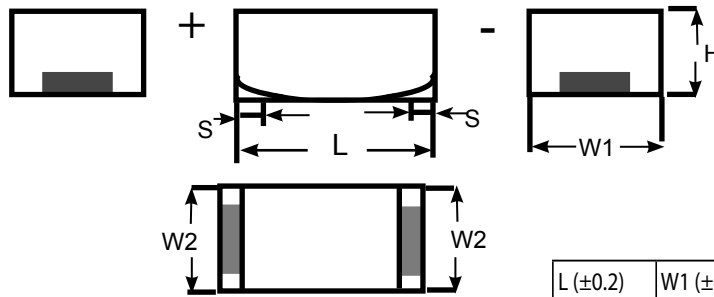

| L (±0.2) | W1 (±0.2) | W2 (±0.1) | H (±0.2) | S (±0.3) |
|----------|-----------|-----------|----------|----------|
| 7.3 mm | 4.3 mm | 2.4 mm | 1.9 mm | 1.3 mm |

Surface finish of terminal; Tin (Sn)

Marking

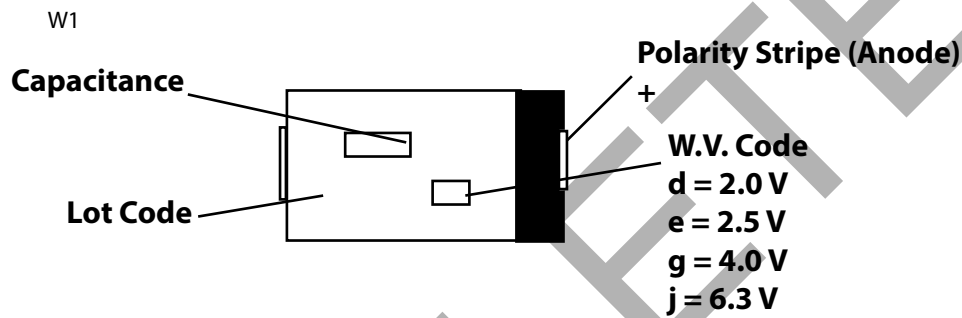



Part Numbering System

| | | | | | |
|--|---|--|--|---|--|
| <p>SPSX</p> <p> </p> <p>Type</p> | <p>221</p> <p> </p> <p>Capacitance Code</p> <p>820 = 82</p> <p>101 = 100</p> <p>221 = 220</p> | <p>M</p> <p> </p> <p>Capacitance Tolerance</p> <p>M = ±20%</p> | <p>0E</p> <p> </p> <p>Voltage Code</p> <p>02 = 2.0 Vdc</p> <p>0E = 2.5 VDC</p> <p>04 = 4.0 Vdc</p> <p>06 = 6.3 Vdc</p> | <p>R</p> <p> </p> <p>Packaging Code</p> <p>R = Tape & Reel: 3500 pcs/reel</p> <p>B = Bulk</p> | <p>-7</p> <p> </p> <p>Optional Lower ESR Value at 100 kHz (see tables for available options)</p> |
|--|---|--|--|---|--|

Type SPSX Solid Polymer Aluminum SMT Capacitors**Ratings**

| Capacitance (μ F) | Catalog Part Number | Max. D.F. @ 120 Hz | Max. DCL (μ A) | Max. E.S.R. @ 100kHz/+20°C (m Ω) | Max. Ripple Current @ 100kHz/(+20°C to +105°C) (Arms) |
|--------------------------------|------------------------|-----------------------|------------------------|--|---|
| 2.0 Vdc (Surge 2.5 Vdc) | | | | | |
| 180 | SPSX181M02R | 0.06 | 36 | 9 | 3 |
| 220 | SPSX221M02R | 0.06 | 44 | 9 | 3 |
| 270 | SPSX271M02R | 0.06 | 54 | 9 | 3 |
| 270 | SPSX271M02R-6 | 0.06 | 54 | 6 | 3.5 |
| 270 | SPSX271M02R-4 | 0.06 | 54 | 4.5 | 3.8 |
| 330 | SPSX331M02R | 0.06 | 66 | 9 | 3 |
| 330 | SPSX331M02R-6 | 0.06 | 66 | 6 | 3.5 |
| 330 | SPSX331M02R-4 | 0.06 | 66 | 4.5 | 3.8 |
| 390 | SPSX391M02R | 0.06 | 78 | 9 | 3 |
| 390 | SPSX391M02R-6 | 0.06 | 78 | 6 | 3.5 |
| 390 | SPSX391M02R-4 | 0.06 | 78 | 4.5 | 4 |
| 470 | SPSX471M02R | 0.06 | 94 | 9 | 3 |
| 470 | SPSX471M02R-6 | 0.06 | 94 | 6 | 3.5 |
| 470 | SPSX471M02R-4 | 0.06 | 94 | 4.5 | 4 |
| 560 | SPSX561M02R-4 | 0.06 | 112 | 4.5 | 4 |
| 2.5 Vdc (Surge 3.1 Vdc) | | | | | |
| 150 | SPSX151M0ER | 0.06 | 37.5 | 9 | 3 |
| 180 | SPSX181M0ER | 0.06 | 45 | 9 | 3 |
| 220 | SPSX221M0ER | 0.06 | 55 | 9 | 3 |
| 220 | SPSX221M0ER-7 | 0.06 | 55 | 7 | 3.5 |
| 270 | SPSX271M0ER-7 | 0.06 | 67.5 | 7 | 3.5 |
| 330 | SPSX331M0ER | 0.06 | 82.5 | 9 | 3 |
| 330 | SPSX331M0ER-6 | 0.06 | 82.5 | 6 | 3.5 |
| 330 | SPSX331M0ER-4 | 0.06 | 82.5 | 4.5 | 4 |
| 390 | SPSX391M0ER | 0.06 | 97.5 | 9 | 3 |
| 390 | SPSX391M0ER-6 | 0.06 | 97.5 | 6 | 3.5 |
| 390 | SPSX391M0ER-4 | 0.06 | 97.5 | 4.5 | 4 |
| 470 | SPSX471M0ER | 0.06 | 117.5 | 9 | 3 |
| 470 | SPSX471M0ER-6 | 0.06 | 117.5 | 6 | 3.5 |
| 470 | SPSX471M0ER-4 | 0.06 | 117.5 | 4.5 | 4 |
| 4.0 Vdc (Surge 5.0 Vdc) | | | | | |
| 82 | SPSX820M04R | 0.06 | 32.8 | 9 | 3 |
| 100 | SPSX101M04R | 0.06 | 40 | 9 | 3 |
| 150 | SPSX151M04R | 0.06 | 60 | 9 | 3 |
| 150 | SPSX151M04R-7 | 0.06 | 60 | 7 | 3.5 |
| 180 | SPSX181M04R | 0.06 | 72 | 9 | 3 |
| 220 | SPSX221M04R | 0.06 | 88 | 9 | 3 |
| 6.3 Vdc (Surge 8.0 Vdc) | | | | | |
| 120 | SPSX121M06R-7 | 0.06 | 75.6 | 7 | 3.5 |
| 150 | SPSX151M06R | 0.06 | 94.5 | 9 | 3 |

Reflow Soldering Profile

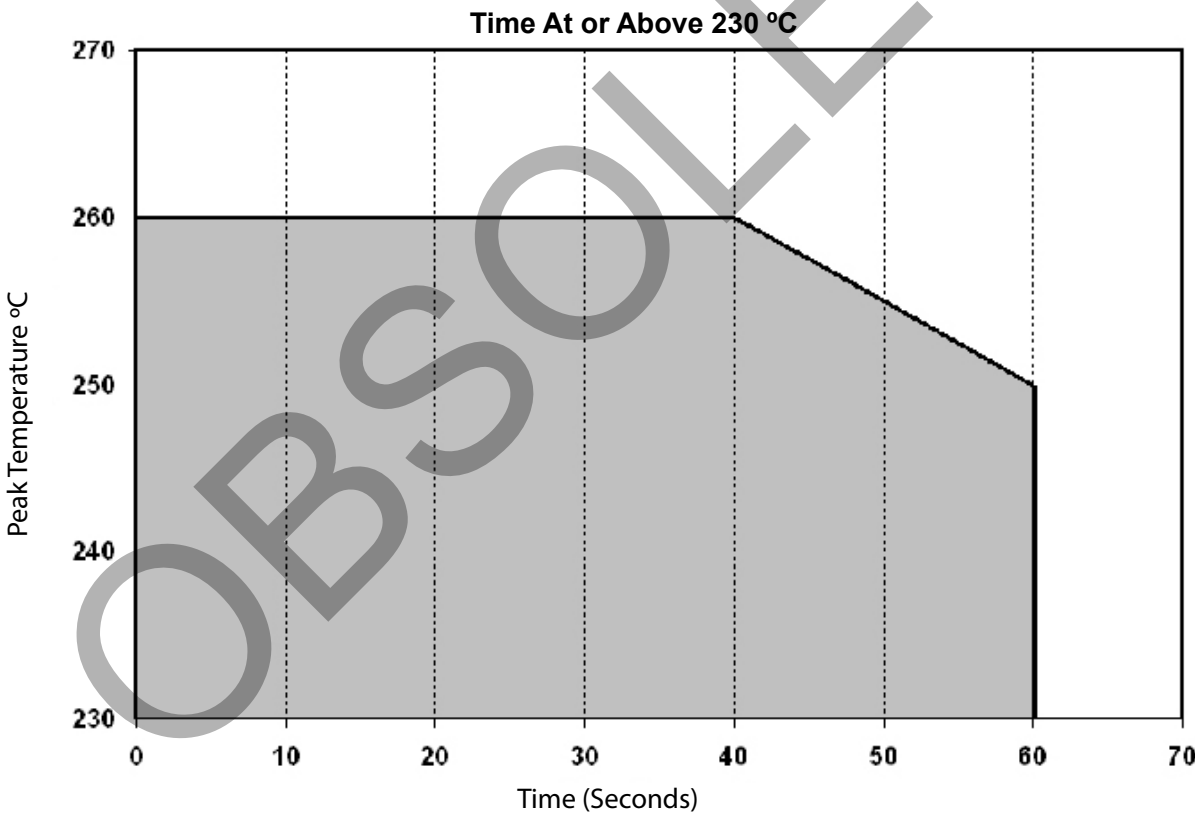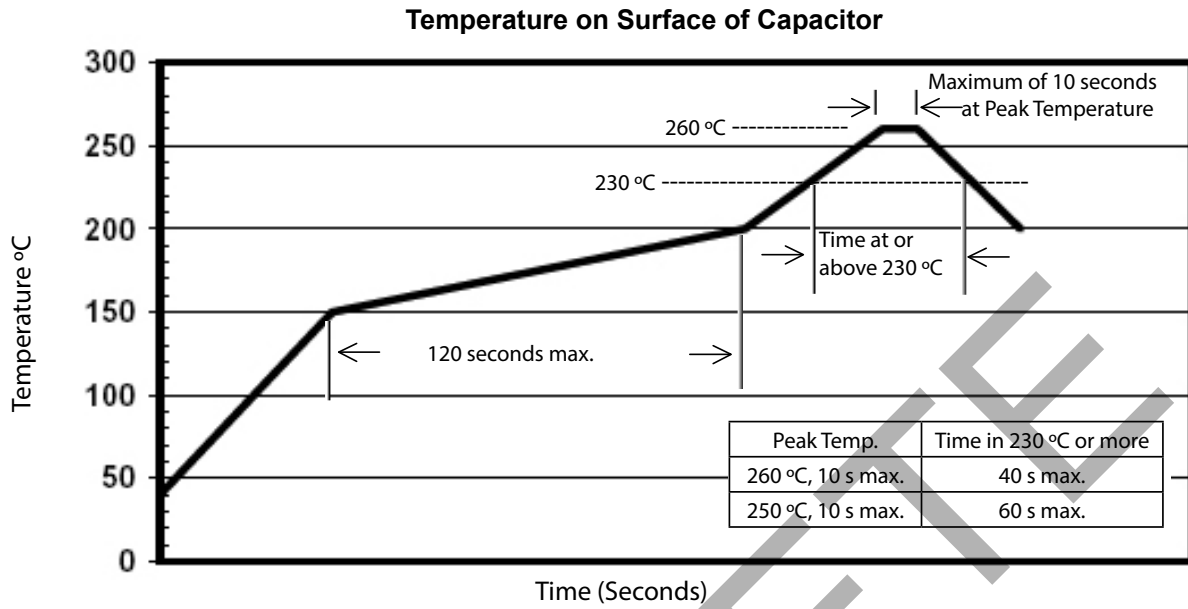

Type SPSX Solid Polymer Aluminum SMT Capacitors

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.

OBSOLETE

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.