

# 74AHCT132D,118 Datasheet



DiGi Electronics Part Number Manufacturer Manufacturer Product Number Description Detailed Description

74AHCT132D,118-DG Nexperia USA Inc. 74AHCT132D,118 IC GATE NAND 4CH 2-INP 1450 NAND Gate IC 4 Channel 14-SO

https://www.DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.



# Purchase and inquiry

Manufacturer Product Number:	Manufacturer:
74AHCT132D,118	Nexperia USA Inc.
Series:	Product Status:
74AHCT	Active
Logic Type:	Number of Circuits:
NAND Gate	4
Number of Inputs:	Features:
2	
Voltage - Supply:	Current - Quiescent (Max):
4.5V ~ 5.5V	2 μΑ
Current - Output High, Low:	Input Logic Level - Low:
8mA, 8mA	0.5V ~ 0.6V
Input Logic Level - High:	Max Propagation Delay @ V, Max CL:
1.9V ~ 2.1V	8ns @ 5V, 50pF
Operating Temperature:	Mounting Type:
-40°C ~ 125°C	Surface Mount
Supplier Device Package:	Package / Case:
14-50	14-SOIC (0.154", 3.90mm Width)
Base Product Number:	
74AHCT132	

# **Environmental & Export classification**

RoHS Status:	Moisture Sensitivity Level (MSL):
ROHS3 Compliant	1 (Unlimited)
REACH Status:	ECCN:
REACH Unaffected	EAR99
HTSUS:	
8542.39.0001	

Quad 2-input NAND Schmitt trigger Rev. 9 — 29 February 2024

**Product data sheet** 

## 1. General description

The 74AHC132; 74AHCT132 is a quad 2-input NAND gate with Schmitt-trigger inputs. Inputs are overvoltage tolerant. This feature allows the use of these devices as translators in mixed voltage environments.

## 2. Features and benefits

- Wide supply voltage range from 2.0 V to 5.5 V
- Overvoltage tolerant inputs to 5.5 V
- High noise immunity
- CMOS low power dissipation
- Input levels:
  - For 74AHC132: CMOS level
  - For 74AHCT132: TTL level
- Latch-up performance exceeds 100 mA per JESD 78 Class II Level A
- ESD protection:
  - HBM: ANSI/ESDA/JEDEC JS-001 class 2 exceeds 2000 V
  - CDM: ANSI/ESDA/JEDEC JS-002 class C3 exceeds 1000 V
- Multiple package options
- Specified from -40 °C to +85 °C and from -40 °C to +125 °C


# nexperia

#### Quad 2-input NAND Schmitt trigger

# 3. Ordering information

Type number	Package	Package									
	Temperature range	Name	Description	Version							
<u>74AHC132D</u> 74AHCT132D	-40 °C to +125 °C	SO14	plastic small outline package; 14 leads; body width 3.9 mm	<u>SOT108-1</u>							
<u>74AHC132PW</u> 74AHCT132PW	-40 °C to +125 °C	TSSOP14	plastic thin shrink small outline package; 14 leads; body width 4.4 mm	<u>SOT402-1</u>							
<u>74AHC132BQ</u> 74AHCT132BQ	-40 °C to +125 °C	DHVQFN14	plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 14 terminals; body 2.5 × 3 × 0.85 mm	<u>SOT762-1</u>							

## 4. Functional diagram

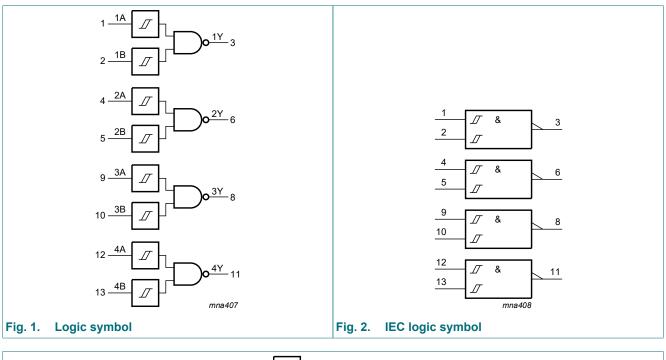





Fig. 3. Logic diagram (one Schmitt trigger)

#### Quad 2-input NAND Schmitt trigger

## 5. Pinning information

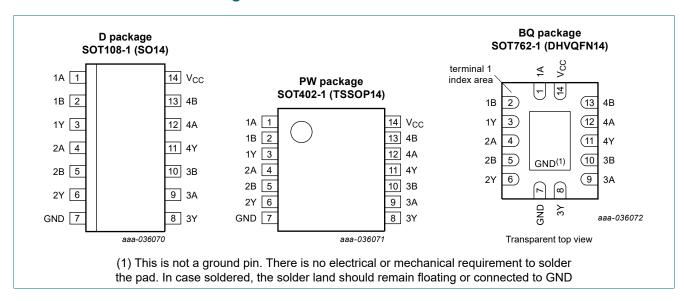

#### 5.1. Pinning

## 5.2. Pin description

#### Table 2. Pin description

Symbol	Pin	Description
1A, 2A, 3A, 4A	1, 4, 9, 12	data input A
1B, 2B, 3B, 4B	2, 5, 10, 13	data input B
1Y, 2Y, 3Y, 4Y	3, 6, 8, 11	data output Y
GND	7	ground (0 V)
V <sub>CC</sub>	14	supply voltage

## 6. Functional description

#### Table 3. Function table

H = HIGH voltage level; L = LOW voltage level.

Input		Output
nA	nB	nY
L	L	Н
L	Н	Н
Н	L	Н
Н	Н	L

#### Quad 2-input NAND Schmitt trigger

## 7. Limiting values

#### Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Max	Unit
V <sub>CC</sub>	supply voltage			-0.5	+7.0	V
VI	input voltage			-0.5	+7.0	V
I <sub>IK</sub>	input clamping current	V <sub>I</sub> < -0.5 V	[1]	-20	-	mA
I <sub>OK</sub>	output clamping current	$V_{\rm O}$ < -0.5 V or $V_{\rm O}$ > $V_{\rm CC}$ + 0.5 V	[1]	-20	+20	mA
lo	output current	$V_{\rm O}$ = -0.5 V to (V <sub>CC</sub> + 0.5 V)		-25	+25	mA
I <sub>CC</sub>	supply current			-	+75	mA
I <sub>GND</sub>	ground current			-75	-	mA
T <sub>stg</sub>	storage temperature			-65	+150	°C
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> = -40 °C to +125 °C	[2]	-	500	mW

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] For SOT108-1 (SO14) package: P<sub>tot</sub> derates linearly with 10.1 mW/K above 100 °C.

For SOT402-1 (TSSOP14) package: P<sub>tot</sub> derates linearly with 7.3 mW/K above 81 °C.

For SOT762-1 (DHVQFN14) package: Ptot derates linearly with 9.6 mW/K above 98 °C.

## 8. Recommended operating conditions

#### Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	74AHC132			7.	Unit		
			Min	Тур	Мах	Min	Тур	Max	]
V <sub>CC</sub>	supply voltage		2.0	5.0	5.5	4.5	5.0	5.5	V
VI	input voltage		0	-	5.5	0	-	5.5	V
Vo	output voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
T <sub>amb</sub>	ambient temperature		-40	+25	+125	-40	+25	+125	°C
Δt/ΔV	input transition rise and	V <sub>CC</sub> = 3.3 V ± 0.3 V	-	-	100	-	-	-	ns/V
	fall rate	V <sub>CC</sub> = 5.0 V ± 0.5 V	-	-	20	-	-	20	ns/V

Quad 2-input NAND Schmitt trigger

## 9. Static characteristics

#### Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		25 °C		-40 °C to +85 °C		-40 °C to +125 °C		Unit
			Min	Тур	Max	Min	Max	Min	Max	-
74AHC1	32	1	1							-
V <sub>OH</sub>	HIGH-level	$V_{I} = V_{T+}$ or $V_{T-}$								
	output voltage	I <sub>O</sub> = -50 μA; V <sub>CC</sub> = 2.0 V	1.9	2.0	-	1.9	2.2	1.9	-	V
		I <sub>O</sub> = -50 μA; V <sub>CC</sub> = 3.0 V	2.9	3.0	-	2.9	3.15	2.9	-	V
		I <sub>O</sub> = -50 μA; V <sub>CC</sub> = 4.5 V	4.4	4.5	-	4.4	3.85	4.4	-	V
		I <sub>O</sub> = -4.0 mA; V <sub>CC</sub> = 3.0 V	2.58	-	-	2.48	-	2.40	-	V
		I <sub>O</sub> = -8.0 mA; V <sub>CC</sub> = 4.5 V	3.94	-	-	3.80	-	3.70	-	V
V <sub>OL</sub>	LOW-level	$V_{I} = V_{T+}$ or $V_{T-}$								
	output voltage	I <sub>O</sub> = 50 μA; V <sub>CC</sub> = 2.0 V	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 50 μA; V <sub>CC</sub> = 3.0 V	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 50 μA; V <sub>CC</sub> = 4.5 V	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 4.0 mA; V <sub>CC</sub> = 3.0 V	-	-	0.36	-	0.44	-	0.55	V
		I <sub>O</sub> = 8.0 mA; V <sub>CC</sub> = 4.5 V	-	-	0.36	-	0.44	-	0.55	V
l	input leakage current	V <sub>I</sub> = 5.5 V or GND; V <sub>CC</sub> = 0 V to 5.5 V	-	-	0.1	-	1.0	-	2.0	μA
I <sub>CC</sub>	supply current	$V_1 = V_{CC}$ or GND; $I_0 = 0$ A; $V_{CC} = 5.5$ V	-	-	2.0	-	20	-	40	μA
CI	input capacitance	V <sub>I</sub> = V <sub>CC</sub> or GND	-	3	10	-	10	-	10	pF
Co	output capacitance		-	4	-	-	-	-	-	pF
74AHCT	132		1							1
V <sub>OH</sub>	HIGH-level	$V_{I} = V_{T+}$ or $V_{T-}$ ; $V_{CC} = 4.5 V$								
	output voltage	I <sub>O</sub> = -50 μA	4.4	4.5	-	4.4	-	4.4	-	V
		I <sub>O</sub> = -8.0 mA	3.94	-	-	3.80	-	3.70	-	V
V <sub>OL</sub>	LOW-level	$V_{I} = V_{T+} \text{ or } V_{T-}; V_{CC} = 4.5 \text{ V}$								
	output voltage	I <sub>O</sub> = 50 μA	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 8.0 mA	-	-	0.36	-	0.44	-	0.55	V
l <sub>l</sub>	input leakage current	V <sub>I</sub> = 5.5 V or GND; V <sub>CC</sub> = 0 V to 5.5 V	-	-	0.1	-	1.0	-	2.0	μA
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5$ V	-	-	2.0	-	20	-	40	μA
ΔI <sub>CC</sub>	additional supply current	per input pin; V <sub>1</sub> = V <sub>CC</sub> - 2.1 V; other pins at V <sub>CC</sub> or GND; $I_0 = 0 A$ ; V <sub>CC</sub> = 4.5 V to 5.5 V	-	-	1.35	-	1.5	-	1.5	mA
CI	input capacitance	V <sub>I</sub> = V <sub>CC</sub> or GND	-	3	10	-	10	-	10	pF
Co	output capacitance		-	4	-	-	-	-	-	pF

#### **Quad 2-input NAND Schmitt trigger**

## **10.** Dynamic characteristics

#### **Table 7. Dynamic characteristics**

Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 5.

Symbol	Parameter	Conditions			25 °C		-40 °C t	o +85 °C	-40 °C to +125 °C		Unit
				Min	Typ[1]	Max	Min	Мах	Min	Max	1
74AHC1	32	1			1	I	1		I		
	propagation	nA, nB to nY; see Fig. 4	[2]								
	delay	V <sub>CC</sub> = 3.0 V to 3.6 V									
		C <sub>L</sub> = 15 pF		-	4.4	11.9	1.0	14.0	1.0	15.0	ns
		C <sub>L</sub> = 50 pF		-	6.2	15.4	1.0	17.5	1.0	19.5	ns
		V <sub>CC</sub> = 4.5 V to 5.5 V									
		C <sub>L</sub> = 15 pF		-	3.3	7.7	1.0	9.0	1.0	10.0	ns
		C <sub>L</sub> = 50 pF		-	4.7	9.7	1.0	11.0	1.0	12.5	ns
C <sub>PD</sub>	power dissipation capacitance	$f_i = 1 \text{ MHz}; V_i = \text{GND to } V_{\text{CC}}$	[3]	-	11	-	-	-	-	-	pF
74AHCT	132; V <sub>CC</sub> = 4.	5 V to 5.5 V									
t <sub>pd</sub>		nA, nB to nY; see Fig. 4	[2]								
	delay	C <sub>L</sub> = 15 pF		-	3.5	7.0	1.0	8.0	1.0	9.0	ns
		C <sub>L</sub> = 50 pF		-	5.0	8.0	1.0	9.0	1.0	10.0	ns
C <sub>PD</sub>	power dissipation capacitance	$f_i = 1 \text{ MHz}; V_i = \text{GND to } V_{\text{CC}}$	[3]	-	14	-	-	-	-	-	pF

Typical values are measured at nominal supply voltage ( $V_{CC}$  = 3.3 V and  $V_{CC}$  = 5.0 V). [1]

[2]

 $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ .  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu$ W). [3]

 $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma (C_L \times V_{CC}^2 \times f_o)$  where:

f<sub>i</sub> = input frequency in MHz;

 $f_o = output$  frequency in MHz;

 $C_{L}$  = output load capacitance in pF;


V<sub>CC</sub> = supply voltage in V;

N = number of inputs switching;

 $\Sigma(C_L \times V_{CC}^2 \times f_o)$  = sum of the outputs.


#### Quad 2-input NAND Schmitt trigger

## **10.1. Waveform and test circuit**

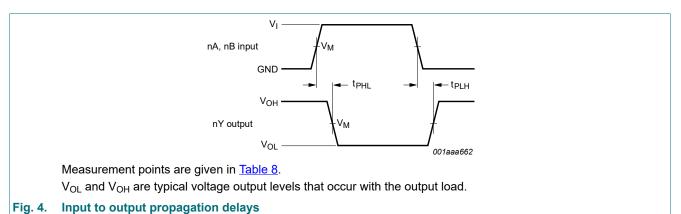

## Table 8. Measurement points

Туре	Input	Output
	V <sub>M</sub>	V <sub>M</sub>
74AHC132	0.5 x V <sub>CC</sub>	0.5 x V <sub>CC</sub>
74AHCT132	1.5 V	0.5 x V <sub>CC</sub>

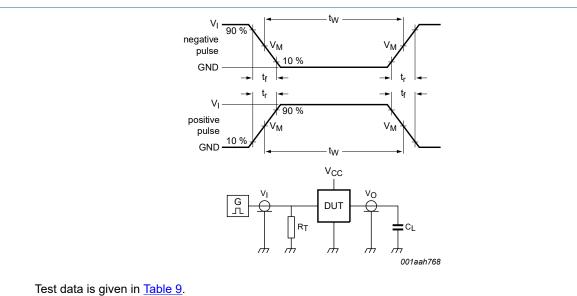

Definitions test circuit:

 $R_T$  = termination resistance should be equal to output impedance  $Z_o$  of the pulse generator.

C<sub>L</sub> = load capacitance including jig and probe capacitance.

#### Fig. 5. Test circuit for measuring switching times

Table 9. Test data				
Туре	Input		Load	Test
	VI	t <sub>r</sub> , t <sub>f</sub>	CL	
74AHC132	V <sub>CC</sub>	≤ 3.0 ns	50 pF, 15 pF	t <sub>PLH</sub> , t <sub>PHL</sub>
74AHCT132	3.0 V	≤ 3.0 ns	50 pF, 15 pF	t <sub>PLH</sub> , t <sub>PHL</sub>

Quad 2-input NAND Schmitt trigger


## **11. Transfer characteristics**

#### Table 10. Transfer characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		25 °C		-40 °C t	o +85 °C	-40 °C to	o +125 °C	Unit
			Min	Тур	Max	Min	Мах	Min	Max	1
74AHC1	32									
V <sub>T+</sub>	positive-going threshold	V <sub>CC</sub> = 3.0 V	-	-	2.2	-	2.2	-	2.2	V
	voltage	V <sub>CC</sub> = 4.5 V	-	-	3.15	-	3.15	-	3.15	V
		V <sub>CC</sub> = 5.5 V	-	-	3.85	-	3.85	-	3.85	V
V <sub>T-</sub>	negative-going threshold	V <sub>CC</sub> = 3.0 V	0.9	-	-	0.9	-	0.9	-	V
	voltage	V <sub>CC</sub> = 4.5 V	1.35	-	-	1.35	-	1.35	-	V
		V <sub>CC</sub> = 5.5 V	1.65	-	-	1.65	-	1.65	-	V
V <sub>H</sub>	hysteresis voltage	V <sub>CC</sub> = 3.0 V	0.3	-	1.2	0.3	1.2	0.25	1.2	V
		V <sub>CC</sub> = 4.5 V	0.4	-	1.4	0.4	1.4	0.35	1.4	V
		V <sub>CC</sub> = 5.5 V	0.5	-	1.6	0.5	1.6	0.45	1.6	V
74АНСТ	132									
V <sub>T+</sub>	positive-going threshold	V <sub>CC</sub> = 4.5 V	-	-	1.9	-	1.9	-	1.9	V
	voltage	V <sub>CC</sub> = 5.5 V	-	-	2.1	-	2.1	-	2.1	V
V <sub>T-</sub>	negative-going threshold	V <sub>CC</sub> = 4.5 V	0.5	-	-	0.5	-	0.5	-	V
	voltage	V <sub>CC</sub> = 5.5 V	0.6	-	-	0.6	-	0.6	-	V
V <sub>H</sub>	hysteresis voltage	V <sub>CC</sub> = 4.5 V	0.3	-	1.4	0.3	1.4	0.3	1.4	V
		V <sub>CC</sub> = 5.5 V	0.3	-	1.5	0.3	1.5	0.3	1.5	V

## 11.1. Transfer characteristics waveforms

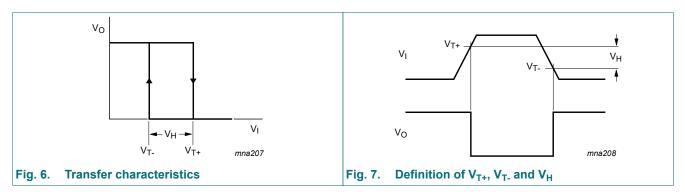

# 74AHC132; 74AHCT132

## Quad 2-input NAND Schmitt trigger

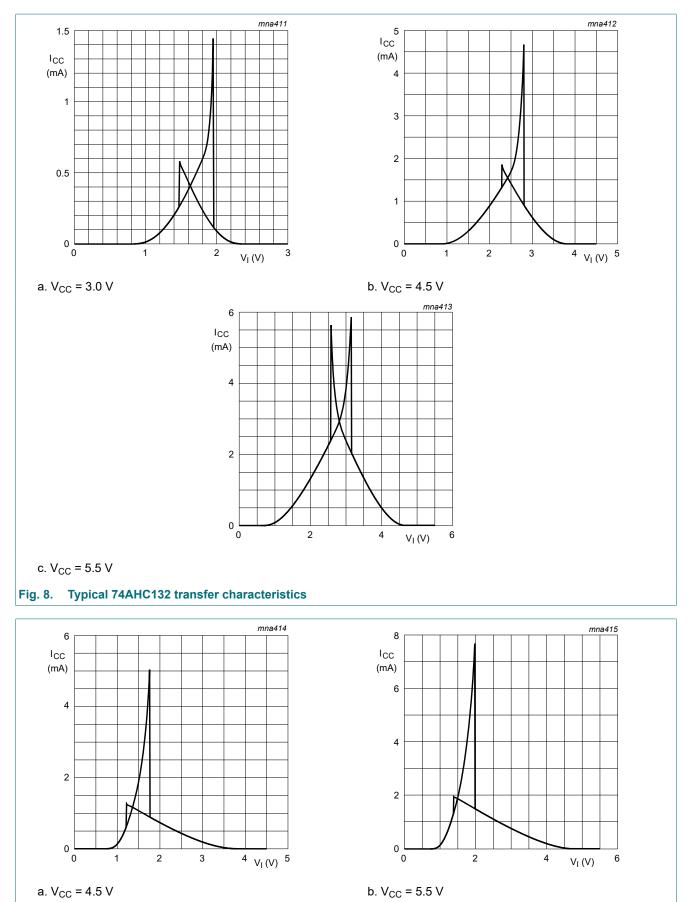



Fig. 9. Typical 74AHCT132 transfer characteristics

74AHC\_AHCT132

All information provided in this document is subject to legal disclaimers.

### Quad 2-input NAND Schmitt trigger


# **12.** Application information

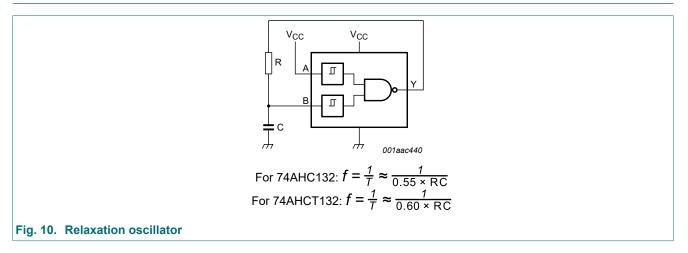

74AHC\_AHCT132

#### Quad 2-input NAND Schmitt trigger

## 13. Package outline

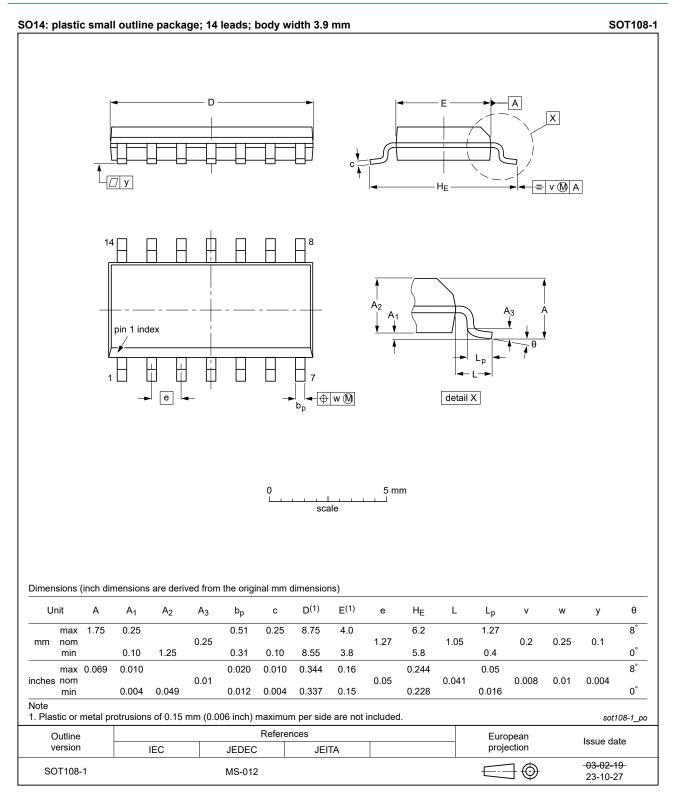

#### Fig. 11. Package outline SOT108-1 (SO14)

# 74AHC132; 74AHCT132

#### **Quad 2-input NAND Schmitt trigger**

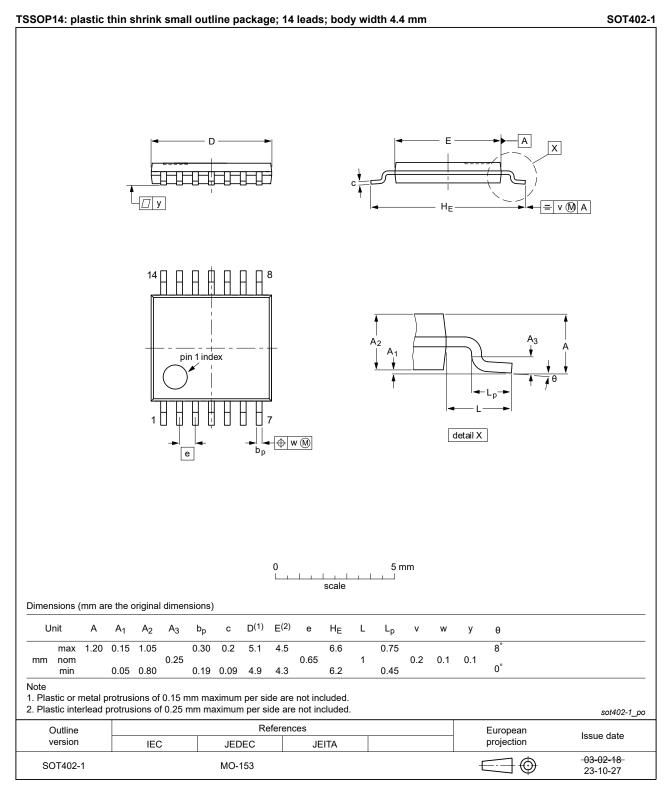


Fig. 12. Package outline SOT402-1 (TSSOP14)

# 74AHC132; 74AHCT132

## Quad 2-input NAND Schmitt trigger

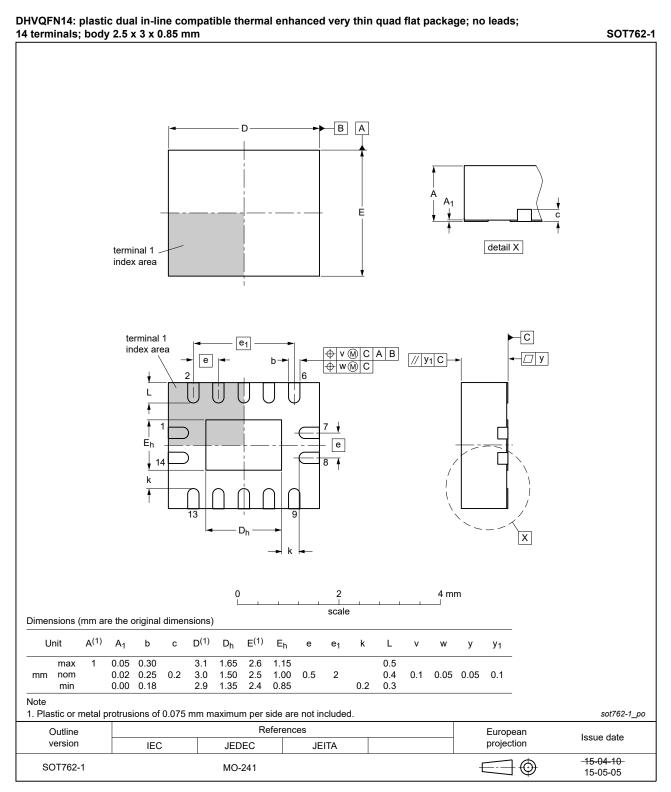


Fig. 13. Package outline SOT762-1 (DHVQFN14)

## Quad 2-input NAND Schmitt trigger

## 14. Abbreviations

Acronym	Description
CDM	Charged Device Model
CMOS	Complementary Metal-Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
НВМ	Human Body Model

## 15. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes	
74AHC_AHCT132 v.9	20240229	Product data sheet	-	74AHC_AHCT132 v.8	
Modifications:	• <u>Fig. 11, Fig. 12</u> : MO-153.	Aligned SO and TSSOF	P package outline dra	awings to JEDEC MS-012 ar	
74AHC_AHCT132 v.8	20230904	Product data sheet	-	74AHC_AHCT132 v.7	
Modifications:	<u>Section 2</u> : ESD specification updated according to the latest JEDEC standard.				
74AHC_AHCT132 v.7	20200703	Product data sheet	-	74AHC_AHCT132 v.6	
<ul> <li>Nexperia.</li> <li>Legal texts have been adapted to the new company name where approved the section 1 and Section 2 updated.</li> <li><u>Section 1</u> and <u>Section 2</u> updated.</li> <li><u>Table 4</u>: Derating values for P<sub>tot</sub> total power dissipation updated.</li> <li>Package outline drawing of SOT762-1 (Fig. 13) updated.</li> </ul>					
74AHC_AHCT132 v.6	20090504	Product data sheet	-	74AHC_AHCT132 v.5	
			- utput voltage and LC	74AHC_AHCT132 v.5	
Modifications:	• <u>Table 6</u> : the con		- utput voltage and LC -		
Modifications: 74AHC_AHCT132 v.5	• <u>Table 6</u> : the con been changed.	ditions for HIGH-level of	- utput voltage and LC - -	W-level output voltage have	
Modifications: 74AHC_AHCT132 v.5 74AHC_AHCT132 v.4	<u>Table 6</u> : the con been changed. 20080509	ditions for HIGH-level of	-	W-level output voltage have	
74AHC_AHC 1132 v.6 Modifications: 74AHC_AHCT132 v.5 74AHC_AHCT132 v.4 74AHC_AHCT132 v.3 74AHC_AHCT132 v.2	Table 6: the con been changed.     20080509     20050207	ditions for HIGH-level or Product data sheet Product data sheet	-	W-level output voltage have 74AHC_AHCT132 v.4 74AHC_AHCT132 v.3	

#### Quad 2-input NAND Schmitt trigger

## 16. Legal information

#### Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

 Please consult the most recently issued document before initiating or completing a design.

- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <u>https://www.nexperia.com</u>.

#### **Definitions**

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### **Disclaimers**

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <u>http://www.nexperia.com/profile/terms</u>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### **Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

All information provided in this document is subject to legal disclaimers.

# 74AHC132; 74AHCT132

#### Quad 2-input NAND Schmitt trigger

## Contents

1. General description	1
2. Features and benefits	1
3. Ordering information	2
4. Functional diagram	2
5. Pinning information	3
5.1. Pinning	3
5.2. Pin description	3
6. Functional description	3
7. Limiting values	4
8. Recommended operating conditions	4
9. Static characteristics	5
10. Dynamic characteristics	6
10.1. Waveform and test circuit	7
11. Transfer characteristics	8
11.1. Transfer characteristics waveforms	8
12. Application information	10
13. Package outline	11
14. Abbreviations	14
15. Revision history	14
16. Legal information	15

#### © Nexperia B.V. 2024. All rights reserved

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 29 February 2024

74AHC\_AHCT132



# **OUR CERTIFICATE**

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we striciy control the quality of products and services. Welcome your RFQ to Email: Info@DiGi-Electronics.com

DCI	DCI		
QUALITY MANAGEMENT SYSTEM CERTIFICATE	ENVIRONMENTAL MANAGEMENT SYSTEM CERTIFICATE	OCCUPATIONAL HEALTH & SAFETY MANAGEMENT SYSTEM CERTIFICATE	の可能可能可能 CERTIFICATE OF INCORPORATION
DIGI ELECTRONICS HK LIMITED	DIGI ELECTRONICS HK LIMITED	DIGI ELECTRONICS HK LIMITED	A. A. B. A. B. W. Hannelity and By that
RATINGS SHE IN HIS COMMERCIAL EXTREMENTAL AND STREET, MONGHO	PLATENTS 207, HO HOR COMMITTEE CALLES HAVE VER CHEET, MONORO	FLATENUE 267, HO HONG COMMITTICE CONTENTS AND A VIEW STREET, MONGAO	DELER.ASTRONOS.IRCLAMTRO 网络電子性者作用公司
GB/T 19001-2016 ktt ISO9001:2015	GB/T 24001-2016 idt ISO14001:2015	GB/T45001-2020 idt ISO45001:2018	$0 \rightarrow 0$ B, B $\rightarrow 0$ A, H B 122 B $\subset \odot$ G $\rightarrow H >$ 11 DN: Any Incorporated In Namy Early under the Comparise Ordinaria $A \rightarrow 0$ , $A \rightarrow A \rightarrow B$ , $A \rightarrow 0 \rightarrow 2$ , $A \rightarrow 0$ (Tributor TeX of the Laws of Hearly Kong, and Bellik compare is
Ref Biol and addressing companyous	Retto nagagante	For the Index of all interviews	Constant with in the Last in Fully Wong, and the lost dompany is it is a lost a limited company.
tankan motor make monotosi mar monotosi mar mar monotosi mar monotosi mar monotosi monotosi mar monotosi mot	tomantener men photosener men metalementener meneration Manalit	torinamientes 2008 Inter land can Can 2008-000-00 Jacobierto National Anna 2008	★ # 4 # 0 ± 0 − Λ + − Λ ± + ± + # ± − Name# 04. 12 heavy 200.
			Oldentrikalis or in edit a kale or Min. Au L. L. DERING Programmer Auguston Mingrade Specific Automatistrature Auguston
In the second se	The second secon	Control tests of a state of the state o	In Heps: 公司各場合公司中局工作用:工作品中提供学校公司名表式市场大型公司者包括基本中 工程品名提用: TableAdd #: TableAdd #: TableAdd #: TableAdd #: TableA





Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.