


# 74HC251PW,118 Datasheet

www.digi-electronics.com



DiGi Electronics Part Number Manufacturer Manufacturer Product Number Description Detailed Description 74HC251PW,118-DG Nexperia USA Inc. 74HC251PW,118 IC MULTIPLEXER 1 X 8:1 16TSSOP Multiplexer 1 x 8:1 16-TSSOP

https://www.DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.



# Purchase and inquiry

Manufacturer:
Nexperia USA Inc.
Product Status:
Active
Circuit:
1 x 8:1
Current - Output High, Low:
5.2mA, 5.2mA
Voltage - Supply:
2V ~ 6V
Mounting Type:
Surface Mount
Supplier Device Package:
16-TSSOP

# Environmental & Export classification

RoHS Status:	Moisture Sensitivity Level (MSL):
ROHS3 Compliant	1 (Unlimited)
REACH Status:	ECCN:
REACH Unaffected	EAR99
HTSUS:	
8542.39.0001	

8-input multiplexer; 3-state Rev. 7 — 14 March 2024

Product data sheet

### 1. General description

The 74HC251; 74HCT251 is an 8-bit multiplexer with eight binary inputs (I0 to I7), three select inputs (S0 to S2) and an output enable input ( $\overline{OE}$ ). The select inputs select one of the eight binary inputs and route it to the complementary outputs (Y and  $\overline{Y}$ ). A HIGH on  $\overline{OE}$  causes the outputs to assume a high-impedance OFF-state. Inputs include clamp diodes that enable the use of current limiting resistors to interface inputs to voltages in excess of V<sub>CC</sub>.

### 2. Features and benefits

- Wide supply voltage range from 2.0 V to 6.0 V
- CMOS low power dissipation
- High noise immunity
- Latch-up performance exceeds 100 mA per JESD 78 Class II Level B
- Complies with JEDEC standards:
- JESD8C (2.7 V to 3.6 V)
  - JESD7A (2.0 V to 6.0 V)
- Input levels:
  - For 74HC251: CMOS level
  - For 74HCT251: TTL level
- Non-inverting data path
- ESD protection:
  - HBM: ANSI/ESDA/JEDEC JS-001 class 2 exceeds 2000 V
  - CDM: ANSI/ESDA/JEDEC JS-002 class C3 exceeds 1000 V
- Specified from -40 °C to +85 °C and from -40 °C to +125 °C


### 3. Ordering information

Type number Package										
	Temperature range	Name	Description	Version						
74HC251D	-40 °C to +125 °C	SO16	plastic small outline package; 16 leads;	<u>SOT109-1</u>						
74HCT251D			body width 3.9 mm							
74HC251PW	-40 °C to +125 °C	TSSOP16	plastic thin shrink small outline package;	<u>SOT403-1</u>						
74HCT251PW			16 leads; body width 4.4 mm							


# nexperia

8-input multiplexer; 3-state

# 4. Functional diagram

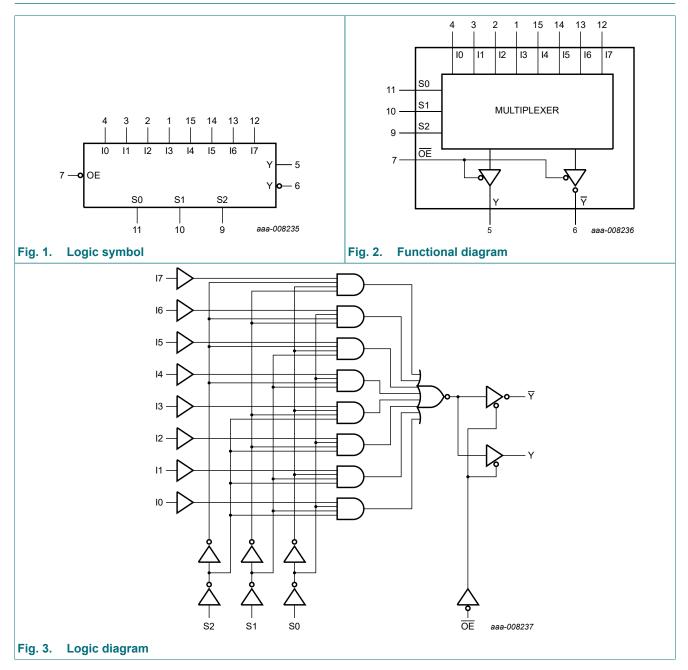

### 5. Pinning information

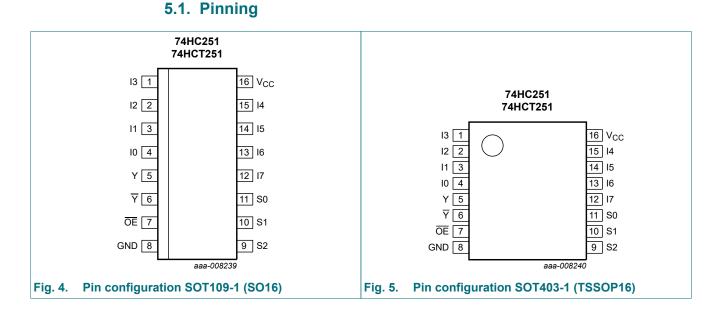

### 5.2. Pin description

Table 2. Pin description										
Symbol	Pin	Description								
10, 11, 12, 13, 14, 15, 16, 17	4, 3, 2, 1, 15, 14, 13, 12	data inputs								
Y	5	multiplexer output								
Y	6	complementary multiplexer output								
OE	7	output enable input (active LOW)								
GND	8	ground (0 V)								
S0, S1, S2	11, 10, 9	common data select inputs								
V <sub>CC</sub>	16	supply voltage								

### 6. Functional description

#### Table 3. Function table

H = HIGH voltage level; L = LOW voltage level; X = don't care; Z = high-impedance OFF-state.

Input	Input											Outp	ut
OE	S2	S1	S0	10	<b>I</b> 1	12	13	14	15	16	17	Y	Y
Н	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Z	Z
L	L	L	L	L	Х	Х	Х	Х	Х	Х	Х	Н	L
L	L	L	L	Н	Х	Х	Х	Х	Х	Х	Х	L	Н
L	L	L	Н	Х	L	Х	Х	Х	Х	Х	Х	Н	L
L	L	L	Н	Х	Н	Х	Х	Х	Х	Х	Х	L	Н
L	L	Н	L	Х	Х	L	Х	Х	Х	Х	Х	Н	L
L	L	Н	L	Х	Х	Н	Х	Х	Х	Х	Х	L	Н
L	L	Н	Н	Х	Х	Х	L	Х	Х	Х	Х	Н	L
L	L	Н	Н	Х	Х	Х	Н	Х	Х	Х	Х	L	Н
L	Н	L	L	Х	Х	Х	Х	L	Х	X	Х	Н	L
L	Н	L	L	Х	Х	Х	Х	Н	Х	Х	Х	L	Н
L	Н	L	Н	Х	Х	Х	Х	Х	L	Х	Х	Н	L
L	Н	L	Н	Х	Х	Х	Х	Х	Н	Х	Х	L	Н
L	Н	Н	L	Х	Х	Х	Х	Х	Х	L	Х	Н	L
L	Н	Н	L	Х	Х	Х	Х	Х	Х	Н	Х	L	Н
L	Н	Н	н	Х	Х	Х	Х	Х	Х	Х	L	Н	L
L	Н	Н	н	Х	Х	Х	Х	Х	Х	Х	н	L	Н

### 7. Limiting values

#### Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>CC</sub>	supply voltage		-0.5	+7	V
I <sub>IK</sub>	input clamping current	$V_{\rm I}$ < -0.5 V or $V_{\rm I}$ > $V_{\rm CC}$ + 0.5 V	-	±20	mA
Ι <sub>ΟΚ</sub>	output clamping current	$V_{\rm O}$ < -0.5 V or $V_{\rm O}$ > $V_{\rm CC}$ + 0.5 V	-	±20	mA
lo	output current	$V_{O} = -0.5 \text{ V to} (V_{CC} + 0.5 \text{ V})$	-	±25	mA
I <sub>CC</sub>	supply current		-	+50	mA
I <sub>GND</sub>	ground current		-50	-	mA
T <sub>stg</sub>	storage temperature		-65	+150	°C
P <sub>tot</sub>	total power dissipation	$T_{amb} = -40 \ ^{\circ}C \ to +125 \ ^{\circ}C$ [1]	-	500	mW
	L				

For SOT109-1 (SO16) package: P<sub>tot</sub> derates linearly with 12.4 mW/K above 110 °C.
 For SOT403-1 (TSSOP16) package: P<sub>tot</sub> derates linearly with 8.5 mW/K above 91 °C.

8-input multiplexer; 3-state

### 8. Recommended operating conditions

#### Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V)

Symbol	Parameter	Conditions		74HC251			74HCT251			
			Min	Тур	Max	Min	Тур	Max	1	
V <sub>CC</sub>	supply voltage		2.0	5.0	6.0	4.5	5.0	5.5	V	
VI	input voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V	
Vo	output voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V	
T <sub>amb</sub>	ambient temperature		-40	+25	+125	-40	+25	+125	°C	
Δt/ΔV	input transition rise and fall rate	V <sub>CC</sub> = 2.0 V	-	-	625	-	-	-	ns/V	
		V <sub>CC</sub> = 4.5 V	-	1.67	139	-	1.67	139	ns/V	
		V <sub>CC</sub> = 6.0 V	-	-	83	-	-	-	ns/V	

### 9. Static characteristics

#### Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		25 °C		-40 °C t	o +85 °C	-40 °C to	+125 °C	Unit
			Min	Тур	Max	Min	Max	Min	Мах	1
74HC25 <sup>,</sup>	1									
V <sub>IH</sub>	HIGH-level	V <sub>CC</sub> = 2.0 V	1.5	1.2	-	1.5	-	1.5	-	V
	input voltage	V <sub>CC</sub> = 4.5 V	3.15	2.4	-	3.15	-	3.15	-	V
		V <sub>CC</sub> = 6.0 V	4.2	3.2	-	4.2	-	4.2	-	V
VIL	LOW-level	V <sub>CC</sub> = 2.0 V	-	0.8	0.5	-	0.5	-	0.5	V
	input voltage	V <sub>CC</sub> = 4.5 V	-	2.1	1.35	-	1.35	-	1.35	V
		V <sub>CC</sub> = 6.0 V	-	2.8	1.8	-	1.8	-	1.8	V
V <sub>OH</sub>	HIGH-level	$V_{I} = V_{IH} \text{ or } V_{IL}$								
	output voltage	I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 2.0 V	1.9	2.0	-	1.9	-	1.9	-	V
		I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 4.5 V	4.4	4.5	-	4.4	-	4.4	-	V
		I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 6.0 V	5.9	6.0	-	5.9	-	5.9	-	V
		I <sub>O</sub> = -4.0 mA; V <sub>CC</sub> = 4.5 V	3.98	4.32	-	3.84	-	3.7	-	V
		I <sub>O</sub> = -5.2 mA; V <sub>CC</sub> = 6.0 V	5.48	5.81	-	5.34	-	5.2	-	V
V <sub>OL</sub>	LOW-level	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>								
	output voltage	I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 2.0 V	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 4.5 V	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 6.0 V	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 4.0 mA; V <sub>CC</sub> = 4.5 V	-	0.15	0.26	-	0.33	-	0.4	V
		I <sub>O</sub> = 5.2 mA; V <sub>CC</sub> = 6.0 V	-	0.16	0.26	-	0.33	-	0.4	V

# 74HC251; 74HCT251

### 8-input multiplexer; 3-state

Symbol	Parameter	Conditions		25 °C		-40 °C t	o +85 °C	-40 °C t	Unit	
			Min	Тур	Max	Min	Мах	Min	Max	
l <sub>l</sub>	input leakage current	$V_{I} = V_{CC}$ or GND; $V_{CC} = 6.0 V$	-	-	±0.1	-	±1.0	-	±1.0	μA
I <sub>OZ</sub>	OFF-state output current	$V_{I} = V_{IH} \text{ or } V_{IL};$ $V_{O} = V_{CC} \text{ or } GND;$ $V_{CC} = 6.0 \text{ V}$	-	-	±0.5	-	±5.0	-	±10.0	μA
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0$ V	-	-	8.0	-	80	-	160	μA
CI	input capacitance		-	3.5	-					pF
74HCT2	51								1	
V <sub>IH</sub>	HIGH-level input voltage	V <sub>CC</sub> = 4.5 V to 5.5 V	2.0	1.6	-	2.0	-	2.0	-	V
V <sub>IL</sub>	LOW-level input voltage	$V_{CC}$ = 4.5 V to 5.5 V	-	1.2	0.8	-	0.8	-	0.8	V
V <sub>OH</sub>	HIGH-level	$V_{I} = V_{IH} \text{ or } V_{IL}; V_{CC} = 4.5 \text{ V}$								
	output voltage	I <sub>O</sub> = -20 μA	4.4	4.5	-	4.4	-	4.4	-	V
		I <sub>O</sub> = -4 mA	3.98	4.32	-	3.84	-	3.7	-	V
V <sub>OL</sub>	LOW-level	$V_{I} = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5 V$								
	output voltage	I <sub>O</sub> = 20 μA	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 4.0 mA	-	0.15	0.26	-	0.33	-	0.4	V
l <sub>l</sub>	input leakage current	$V_{I} = V_{CC}$ or GND; $V_{CC} = 5.5 V$	-	-	±0.1	-	±1.0	-	±1.0	μA
I <sub>OZ</sub>	OFF-state output current	$V_{I} = V_{IH} \text{ or } V_{IL};$ $V_{O} = V_{CC} \text{ or } GND;$ $V_{CC} = 5.5 \text{ V}$	-	-	±0.5	-	±5.0	-	±10	μA
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5$ V	-	-	8.0	-	80	-	160	μA
ΔI <sub>CC</sub>	additional supply current	$V_{I} = V_{CC} - 2.1 \text{ V};$ other inputs at V <sub>CC</sub> or GND; V <sub>CC</sub> = 4.5 V to 5.5 V; I <sub>O</sub> = 0 A								
		per input pin; In inputs	-	100	360	-	450	-	490	μA
		per input pin; OE input	-	150	540	-	675	-	735	μA
		per input pin; Sn input	-	150	540	-	675	-	735	μA
CI	input capacitance		-	3.5	-					pF

8-input multiplexer; 3-state

# **10.** Dynamic characteristics

#### Table 7. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V);  $C_L$  = 50 pF unless otherwise specified; for test circuit, see Fig. 9.

Symbol	Parameter	Conditions			25 °C		-40 °C t	o +85 °C	-40 °C to	o +125 °C	Unit
				Min	Тур	Max	Min	Мах	Min	Max	1
74HC25	1							I	1	1	
t <sub>pd</sub>	propagation	In to Y; see <u>Fig. 6</u>	[1]								
	delay	V <sub>CC</sub> = 2.0 V		-	50	170	-	215	-	255	ns
		V <sub>CC</sub> = 4.5 V		-	18	34	-	43	-	51	ns
		V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF		-	15	-	-	-	-	-	ns
		V <sub>CC</sub> = 6.0 V		-	14	29	-	37	-	43	ns
		In to <del></del> ∇; see <u>Fig. 6</u>	[1]								
		V <sub>CC</sub> = 2.0 V		-	55	175	-	220	-	265	ns
		V <sub>CC</sub> = 4.5 V		-	20	35	-	44	-	53	ns
		V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF		-	17	-	-	-	-	-	ns
		V <sub>CC</sub> = 6.0 V		-	16	30	-	37	-	45	ns
		Sn to Y; see <u>Fig. 7</u>	[1]								
		V <sub>CC</sub> = 2.0 V		-	66	205	-	255	-	310	ns
		V <sub>CC</sub> = 4.5 V		-	24	41	-	51	-	62	ns
		V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF		-	20	-	-	-	-	-	ns
		V <sub>CC</sub> = 6.0 V		-	19	35	-	43	-	53	ns
		Sn to Y; see Fig. 7	[1]								
		V <sub>CC</sub> = 2.0 V		-	69	205	-	255	-	310	ns
		V <sub>CC</sub> = 4.5 V		-	25	41	-	51	-	62	ns
		V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF		-	21	-	-	-	-	-	ns
		V <sub>CC</sub> = 6.0 V		-	20	35	-	43	-	53	ns
t <sub>en</sub>	enable time	$\overline{OE}$ to Y, $\overline{Y}$ ; see <u>Fig. 8</u>	[2]								
		V <sub>CC</sub> = 2.0 V		-	36	140	-	175	-	210	ns
		V <sub>CC</sub> = 4.5 V		-	13	28	-	35	-	42	ns
		V <sub>CC</sub> = 6.0 V		-	10	24	-	30	-	36	ns
t <sub>dis</sub>	disable time	$\overline{OE}$ to Y, $\overline{Y}$ ; see <u>Fig. 8</u>	[3]								
		V <sub>CC</sub> = 2.0 V		-	39	140	-	170	-	210	ns
		V <sub>CC</sub> = 4.5 V		-	14	28	-	35	-	42	ns
		V <sub>CC</sub> = 6.0 V		-	11	24	-	30	-	36	ns
tt	transition	Y, <del>Y</del> ; see <u>Fig. 6</u>	[4]								
	time	V <sub>CC</sub> = 2.0 V		-	19	75	-	95	-	110	ns
		V <sub>CC</sub> = 4.5 V	$\neg$	-	7	15	-	19	-	22	ns
		V <sub>CC</sub> = 6.0 V		-	6	13	-	16	-	19	ns
C <sub>PD</sub>	power dissipation capacitance	$C_L$ = 50 pF; f = 1 MHz; V <sub>1</sub> = GND to V <sub>CC</sub>	[5]	-	44	-	-	-	-	-	pF

# 74HC251; 74HCT251

#### 8-input multiplexer; 3-state

Symbol	Parameter	Conditions			25 °C		-40 °C t	o +85 °C	-40 °C to +125 °C		Unit
				Min	Тур	Max	Min	Max	Min	Max	1
74HCT2	51	1							<u> </u>	_	
t <sub>pd</sub>	propagation	In to Y; see <u>Fig. 6</u>	[1]								
	delay	V <sub>CC</sub> = 4.5 V		-	22	35	-	44	-	53	ns
		V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF		-	19	-	-	-	-	-	ns
		In to ႃ∀; see <u>Fig. 6</u>	[1]								
		V <sub>CC</sub> = 4.5 V		-	22	35	-	44	-	53	ns
		V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF		-	19	-	-	-	-	-	ns
		Sn to Y; see Fig. 7	[1]								
		V <sub>CC</sub> = 4.5 V		-	24	44	-	55	-	66	ns
		V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF		-	20	-	-	-	-	-	ns
		Sn to ႃ∀; see <u>Fig. 7</u>	[1]								
		V <sub>CC</sub> = 4.5 V		-	25	44	-	55	-	66	ns
		V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF		-	21	-	-	-	-	-	ns
t <sub>en</sub>	enable time	$\overline{OE}$ to Y, $\overline{Y}$ ; see <u>Fig. 8</u>	[2]								
		V <sub>CC</sub> = 4.5 V		-	13	28	-	35	-	42	ns
		V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF		-	13	-	-	-	-	-	ns
t <sub>dis</sub>	disable time	$\overline{OE}$ to Y, $\overline{Y}$ ; see <u>Fig. 8</u>	[3]								
		V <sub>CC</sub> = 4.5 V		-	14	28	-	35	-	42	ns
		V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF		-	18	-	-	-	-	-	ns
t <sub>t</sub>	transition	Y, <del>▼</del> ; see <u>Fig. 6</u>	[4]								
	time	V <sub>CC</sub> = 4.5 V		-	7	15	-	19	-	22	ns
C <sub>PD</sub>	power dissipation capacitance	$C_L$ = 50 pF; f = 1 MHz; V <sub>I</sub> = GND to V <sub>CC</sub> - 1.5 V	[5]	-	46	-	-	-	-	-	pF

[1] t<sub>pd</sub> is the same as t<sub>PLH</sub> and t<sub>PHL</sub>.

[2]  $\dot{t}_{en}$  is the same as  $t_{PZH}$  and  $t_{PZL}$ .

[3]  $t_{dis}$  is the same as  $t_{PLZ}$  and  $t_{PHZ}$ .

[4]  $t_t$  is the same as  $t_{THL}$  and  $t_{TLH}$ . [5]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu$ W).  $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum (C_L \times V_{CC}^2 \times f_o)$  where:

 $f_i$  = input frequency in MHz;


 $f_0$  = output frequency in MHz;

 $C_L$  = output load capacitance in pF;


V<sub>CC</sub> = supply voltage in V;

N = number of inputs switching;  $\sum (C_L \times V_{CC}^2 \times f_0)$  = sum of outputs.

8-input multiplexer; 3-state

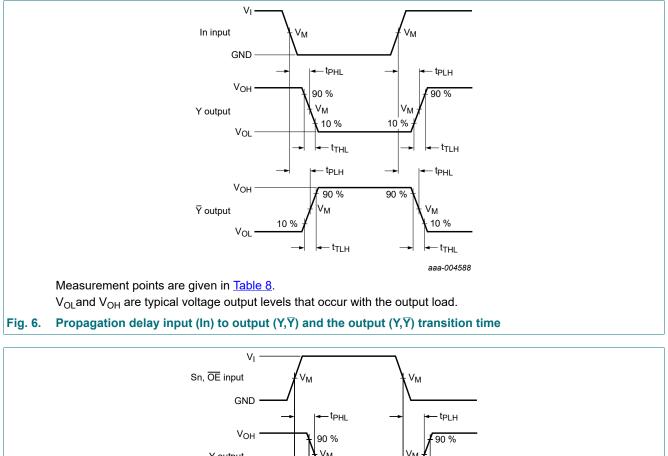


### 10.1. Waveforms and test circuit

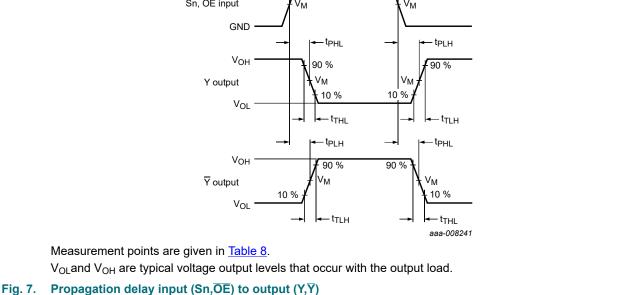

# 74HC251; 74HCT251

#### 8-input multiplexer; 3-state

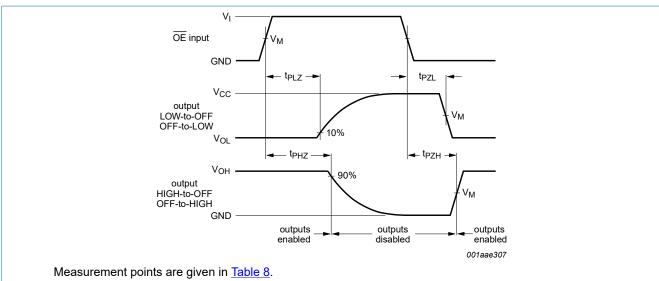

V<sub>OL</sub>and V<sub>OH</sub> are typical voltage output levels that occur with the output load.


#### Fig. 8. Enable and disable times

#### Table 8. Measurement points

Туре	Input	Output
	V <sub>M</sub>	V <sub>M</sub>
74HC251	0.5V <sub>CC</sub>	0.5V <sub>CC</sub>
74HCT251	1.3 V	1.3 V

# 74HC251; 74HCT251

#### 8-input multiplexer; 3-state

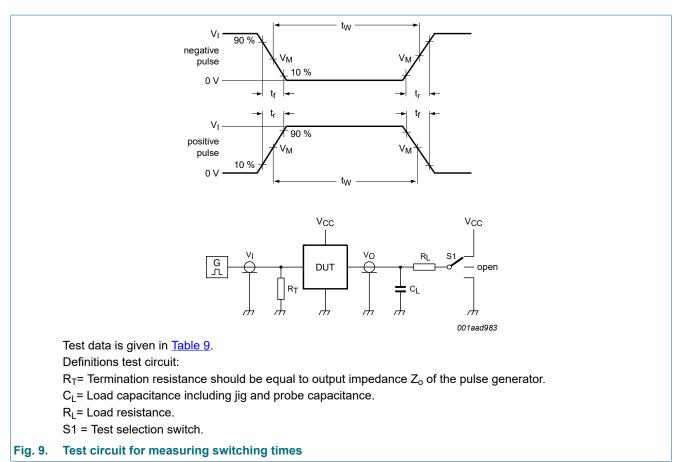

#### Table 9. Test data

Туре	Input		Load		S1 position		
	VI	t <sub>r</sub> , t <sub>f</sub>	CL	RL	t <sub>PHL</sub> , t <sub>PLH</sub>	t <sub>PZH</sub> , t <sub>PHZ</sub>	t <sub>PZL</sub> , t <sub>PLZ</sub>
74HC251	V <sub>CC</sub>	6 ns	15 pF, 50 pF	1 kΩ	open	GND	V <sub>CC</sub>
74HCT251	3 V	6 ns	15 pF, 50 pF	1 kΩ	open	GND	V <sub>CC</sub>

8-input multiplexer; 3-state

### 11. Package outline

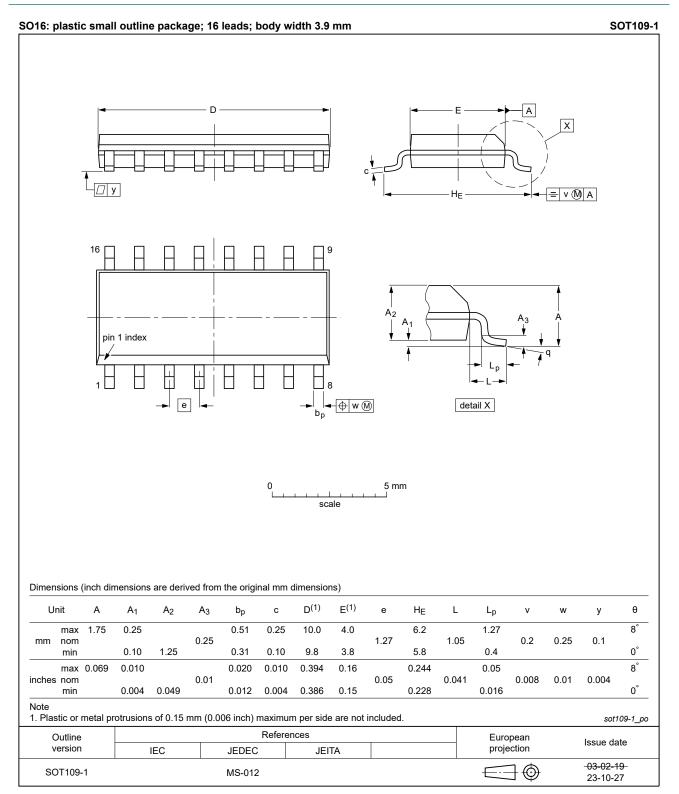


Fig. 10. Package outline SOT109-1 (SO16)

74HC\_HCT251

# 74HC251; 74HCT251

#### 8-input multiplexer; 3-state

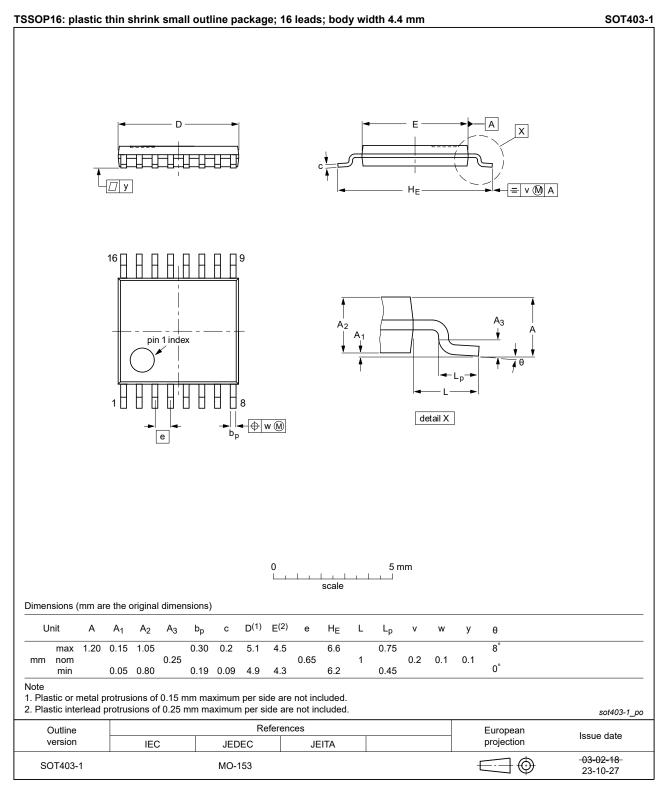


Fig. 11. Package outline SOT403-1 (TSSOP16)

# 12. Abbreviations

Table 10. Abbreviati	able 10. Abbreviations			
Acronym	Description			
CDM	Charged Device Model			
CMOS	Complementary Metal-Oxide Semiconductor			
DUT	Device Under Test			
ESD	ElectroStatic Discharge			
HBM	Human Body Model			
TTL	Transistor-Transistor Logic			

# 13. Revision history

Table 11. Revision history				
Document ID	Release date	Data sheet status	Change notice	Supersedes
74HC_HCT251 v.7	20240314	Product data sheet	-	74HC_HCT251 v.6
Modifications:	and MO-153			drawings to JEDEC MS-012 rest JEDEC standard.
74HC_HCT251 v.6	20210208	Product data sheet	-	74HC_HCT251 v.5
Modifications:	•••	odated. ers 74HC251DB and 74HC <sup>-</sup> nditions for C <sub>PD</sub> have chang	•	,
74HC_HCT251 v.5	20190715	Product data sheet	-	74HC_HCT251 v.4
Modifications:	of Nexperia. <ul> <li>Legal texts</li> </ul>		ew company nam	
74HC_HCT251 v.4	20160201	Product data sheet	-	74HC_HCT251 v.3
Modifications:	Type number	ers 74HC251N and 74HCT2	251N (SOT38-4) re	emoved.
74HC_HCT251 v.3	20130709	Product data sheet	-	74HC_HCT251_CNV v.2
Modifications:	guidelines o	of this data sheet has been f NXP Semiconductors. have been adapted to the n	-	
74HC_HCT251_CNV v.2	19970828	Product specification	-	

#### 8-input multiplexer; 3-state

### 14. Legal information

#### Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

 Please consult the most recently issued document before initiating or completing a design.

- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <u>https://www.nexperia.com</u>.

#### Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### **Disclaimers**

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <u>http://www.nexperia.com/profile/terms</u>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### **Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

# 74HC251; 74HCT251

# Contents

1. General description	1
2. Features and benefits	1
3. Ordering information	1
4. Functional diagram	2
5. Pinning information	3
5.1. Pinning	3
5.2. Pin description	3
6. Functional description	4
7. Limiting values	
8. Recommended operating conditions	5
9. Static characteristics	5
10. Dynamic characteristics	
10.1. Waveforms and test circuit	9
11. Package outline	12
12. Abbreviations	14
13. Revision history	
14. Legal information	

© Nexperia B.V. 2024. All rights reserved

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 14 March 2024

74HC\_HCT251



# **OUR CERTIFICATE**

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we striciy control the quality of products and services. Welcome your RFQ to Email: Info@DiGi-Electronics.com

DCI	DCI		
QUALITY MANAGEMENT SYSTEM CERTIFICATE	ENVIRONMENTAL MANAGEMENT SYSTEM CERTIFICATE	OCCUPATIONAL HEALTH & SAFETY MANAGEMENT SYSTEM CERTIFICATE	の可能可能可能 CERTIFICATE OF INCORPORATION
DIGI ELECTRONICS HK LIMITED	DIGI ELECTRONICS HK LIMITED	DIGI ELECTRONICS HK LIMITED	A. A. B. A. B. W. Hanniby and By that
RATINGS SHE IN HIS COMMERCIAL EXTREMENTAL AND STREET, MONGHO	PLATENTS 207, HO HOR COMMITTEE CALLES HAVE VER CHEET, MONORO	FLATENUE 207, HO HOUS COMPETENCE OF THE 2 MAYA VIEW STREET, MONGAO	DELERATIONCE INCLAMPSO 网络電子性者作用公司
GB/T 19001-2016 ktt ISO9001:2015	GB/T 24001-2016 idt ISO14001:2015	GB/T45001-2020 idt ISO45001:2018	$0 \rightarrow 0$ B, B $\rightarrow 0$ A, H B 122 B $\subset \odot$ G $\rightarrow H >$ 11 DN: Any Incorporated In Namy Early under the Comparise Ordinaria $A \rightarrow 0$ , $A \rightarrow A \rightarrow B$ , $A \rightarrow A \rightarrow C \rightarrow C + C \rightarrow N$ (Theoret T22 D for Larms of Hong Kong, and Balling Compare is
Ref Ref Participation components	Retto nagagante	For the Index of all interviews	Constant with in the Last in Yang Wong, and the lost dompany is it is a lost a limited company.
tankan motor make monotosi mar monotosi mar mar monotosi mar monotosi mar monotosi monotosi mar monotosi mot	tomantener men photosener men metalementener meneration Manalit	torinamientes 2008 Inter land can Can 2008-000-00 Jacobierto Maria Maria	★ # 4 # 0 ± 0 − Λ + − Λ ± + ± + # ± − Name# 04. 12 heavy 200.
			Oldentrikalis or in edit a kale or Min. Au L. L. DERING Programmer Auguston Mingrade Specific Automatistrature Auguston
In the second se	The second secon	Control tests of a state of the state o	In Heps: 公司各場合公司中局工作用:工作品中提供学校公司名表式市场大型公司者包括基本中 工程品名提用: TableAdd #: TableAdd #: TableAdd #: TableAdd #: TableA





Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.