


BC69-25PASX Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	BC69-25PASX-DG
Manufacturer	Nexperia USA Inc.
Manufacturer Product Number	BC69-25PASX
Description	TRANS PNP 20V 2A DFN2020D-3
Detailed Description	Bipolar (BJT) Transistor PNP 20 V 2 A 140MHz 420 mW Surface Mount DFN2020D-3

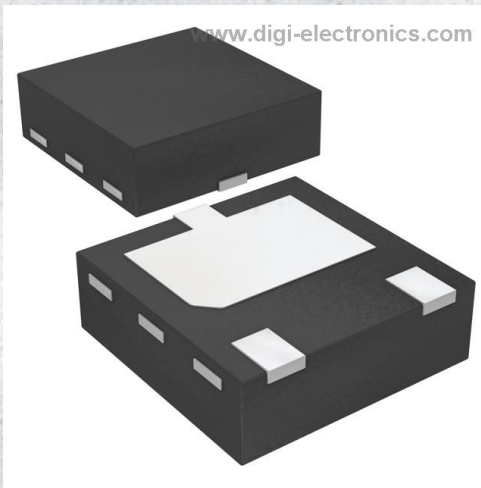

Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

BC69-25PASX

Series:

-

Transistor Type:

PNP

Voltage - Collector Emitter Breakdown (Max):

20 V

Current - Collector Cutoff (Max):

100nA (ICBO)

Power - Max:

420 mW

Operating Temperature:

150°C (TJ)

Package / Case:

3-UDFN Exposed Pad

Base Product Number:

BC69

Manufacturer:

Nexperia USA Inc.

Product Status:

Active

Current - Collector (Ic) (Max):

2 A

Vce Saturation (Max) @ Ib, Ic:

600mV @ 200mA, 2A

DC Current Gain (hFE) (Min) @ Ic, Vce:

85 @ 500mA, 1V

Frequency - Transition:

140MHz

Mounting Type:

Surface Mount

Supplier Device Package:

DFN2020D-3

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:


8541.21.0075

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99



BC69PAS series

20 V, 2 A PNP medium power transistors

Rev. 1 — 19 June 2015

Product data sheet

1. Product profile

1.1 General description

PNP medium power transistors in an ultra thin DFN2020D-3 (SOT1061D) leadless small Surface-Mounted Device (SMD) plastic package with medium power capability and visible and solderable side pads.

NPN complement: BC68PAS series

1.2 Features and benefits

- High collector current capability
 I_C and I_{CM}
- Reduced Printed-Circuit Board (PCB) area requirements
- Exposed heat sink for excellent thermal and electrical conductivity
- AEC-Q101 qualified
- Three current gain selections
- Leadless very small SMD plastic package with medium power capability
- Suitable for Automatic Optical Inspection (AOI) of solder joint

1.3 Applications

- Linear voltage regulators
- Battery driven devices
- MOSFET drivers
- High-side switches
- Power management
- Amplifiers

1.4 Quick reference data

Table 1. Quick reference data



$T_{amb} = 25\text{ °C}$ unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{CEO}	collector-emitter voltage	open base	-	-	-20	V
I_C	collector current		-	-	-2	A
I_{CM}	peak collector current	single pulse; $t_p \leq 1\text{ ms}$	-	-	-3	A
h_{FE}	DC current gain	$V_{CE} = -1\text{ V}$; $I_C = -500\text{ mA}$	[1]	85	-	375
	h_{FE} selection -16	$V_{CE} = -1\text{ V}$; $I_C = -500\text{ mA}$	[1]	100	-	250
	h_{FE} selection -25	$V_{CE} = -1\text{ V}$; $I_C = -500\text{ mA}$	[1]	160	-	375

[1] Pulse test: $t_p \leq 300\text{ ms}$; $\delta \leq 0.02$.

2. Pinning information

Table 2. Pinning

Pin	Description	Simplified outline	Graphic symbol
1	base	 <p>Transparent top view</p>	 <p>sym013</p>
2	emitter		
3	collector		

3. Ordering information

Table 3. Ordering information

Type number	Package		
	Name	Description	Version
BC69PAS	DFN2020D-3	plastic thermal enhanced ultra thin small outline package; no leads; 3 terminals; body 2 × 2 × 0.65 mm.	SOT1061D
BC69-16PAS			
BC69-25PAS			

4. Marking

Table 4. Marking codes

Type number	Marking code
BC69PAS	C1
BC69-16PAS	C2
BC69-25PAS	C3

5. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).


Symbol	Parameter	Conditions	Min	Max	Unit
V_{CBO}	collector-base voltage	open emitter	-	-32	V
V_{CEO}	collector-emitter voltage	open base	-	-20	V
V_{EBO}	emitter-base voltage	open collector	-	-5	V
I_C	collector current		-	-2	A
I_{CM}	peak collector current	single pulse; $t_p \leq 1$ ms	-	-3	A
I_B	base current		-	-0.4	A

Table 5. Limiting values ...continued

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit	
P _{tot}	total power dissipation	T _{amb} ≤ 25 °C	[1]	-	420	mW
			[2]	-	830	mW
			[3]	-	1.1	W
			[4]	-	810	mW
			[5]	-	1.65	W
T _j	junction temperature		-	150	°C	
T _{amb}	ambient temperature		-55	150	°C	
T _{stg}	storage temperature		-65	150	°C	

- [1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.
- [2] Device mounted on an FR4 PCB, single-sided copper, tin-plated and mounting pad for collector 1 cm².
- [3] Device mounted on an FR4 PCB, single-sided copper, tin-plated and mounting pad for collector 6 cm².
- [4] Device mounted on an FR4 PCB, 4-layer copper, tin-plated and standard footprint.
- [5] Device mounted on an FR4 PCB, 4-layer copper, tin-plated and mounting pad for collector 1 cm².

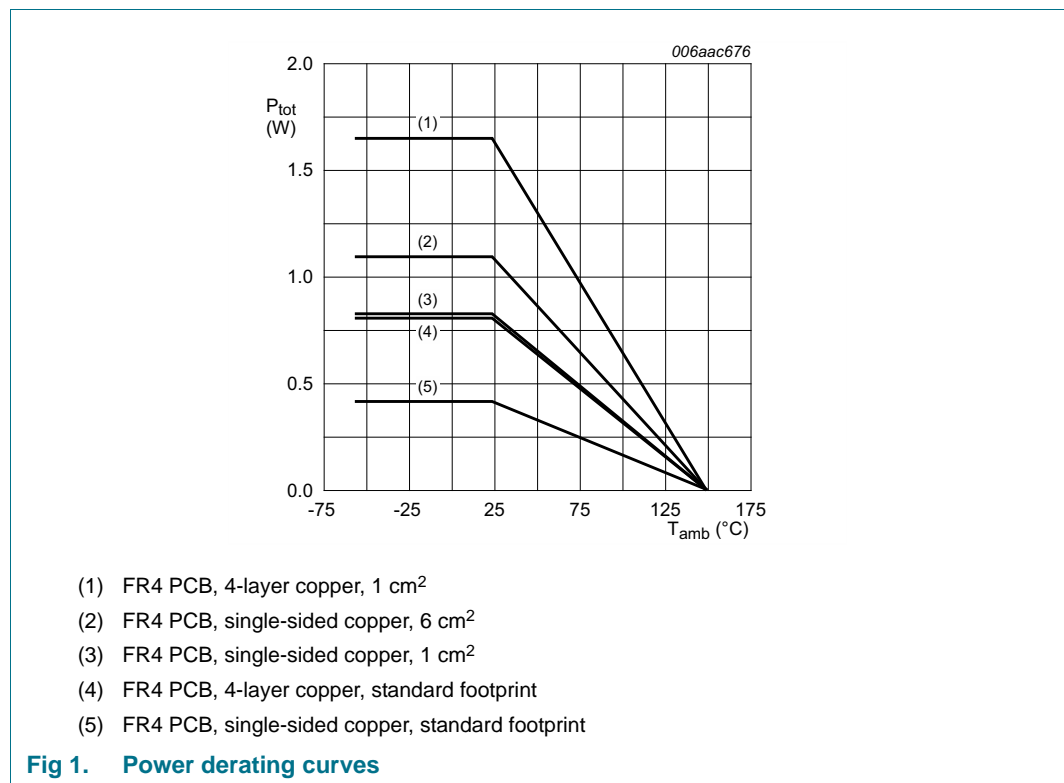



6. Thermal characteristics

Table 6. Thermal characteristics

Symbol	Parameter	Conditions	Max	Unit
$R_{th(j-a)}$	thermal resistance from junction to ambient	in free air	[1] 298	K/W
			[2] 151	K/W
			[3] 114	K/W
			[4] 154	K/W
			[5] 76	K/W
$R_{th(j-sp)}$	thermal resistance from junction to solder point	in free air	20	K/W


- [1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.
 [2] Device mounted on an FR4 PCB, single-sided copper, tin-plated and mounting pad for collector 1 cm².
 [3] Device mounted on an FR4 PCB, single-sided copper, tin-plated and mounting pad for collector 6 cm².
 [4] Device mounted on an FR4 PCB, 4-layer copper, tin-plated and standard footprint.
 [5] Device mounted on an FR4 PCB, 4-layer copper, tin-plated and mounting pad for collector 1 cm²

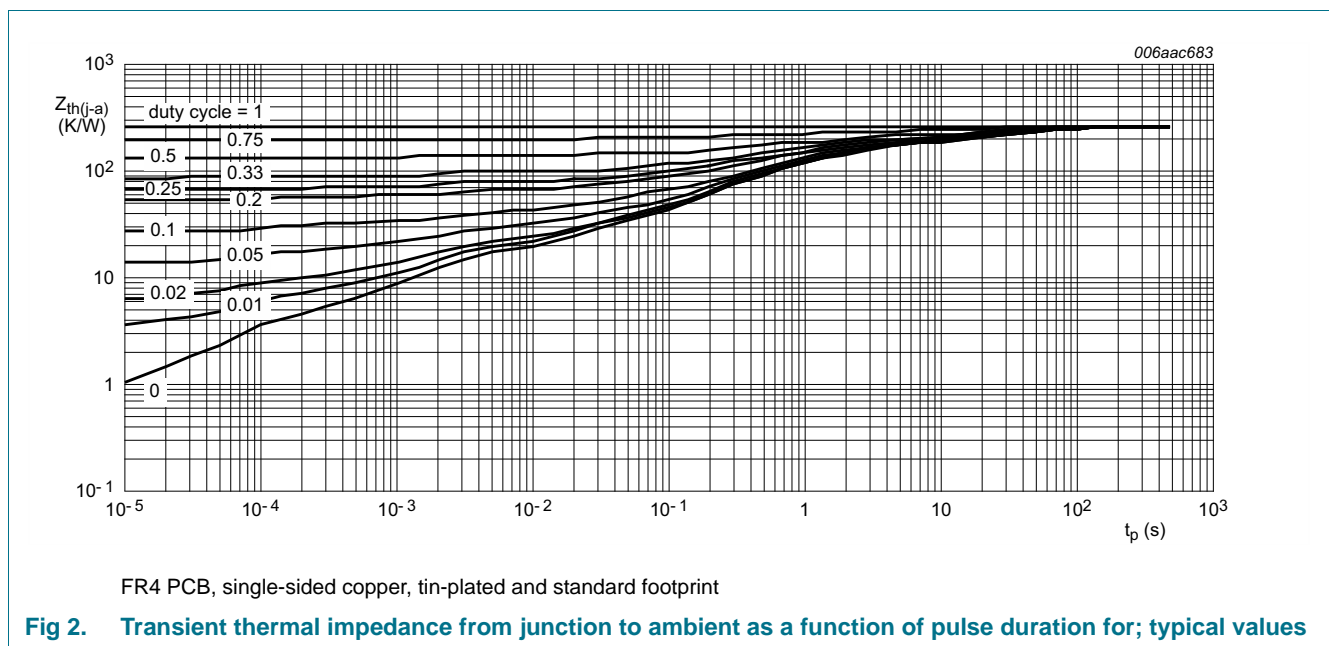

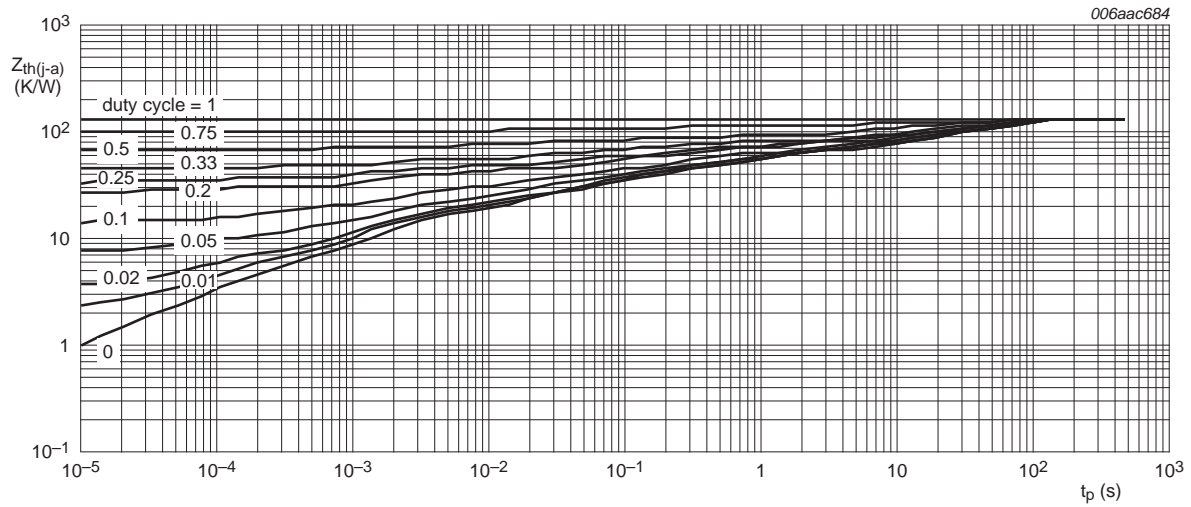

FR4 PCB, single-sided copper, tin-plated and mounting pad for collector 1 cm²

Fig 3. Transient thermal impedance from junction to ambient as a function of pulse duration for; typical values

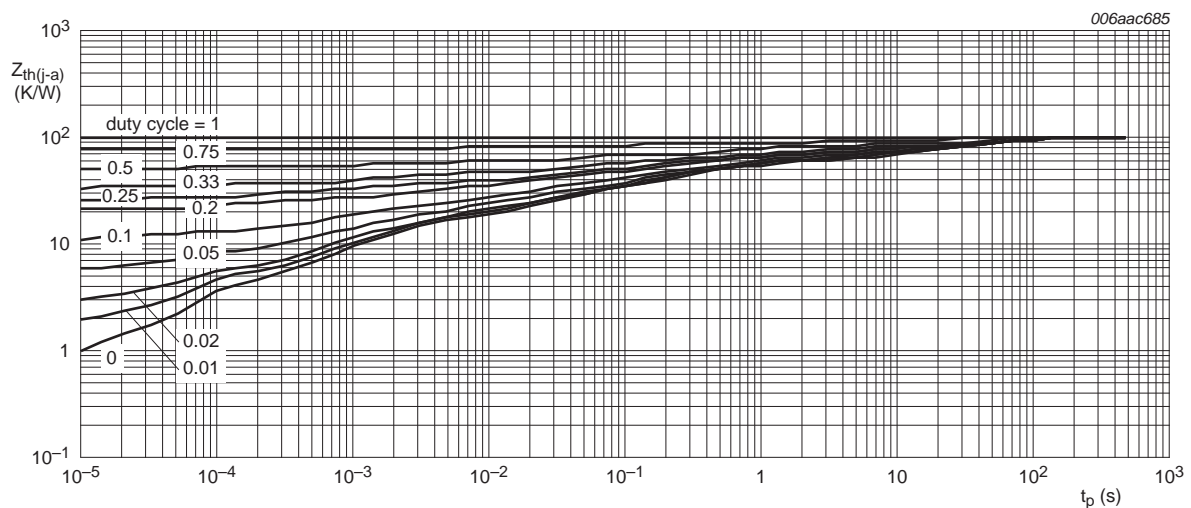

FR4 PCB, single-sided copper, tin-plated and mounting pad for collector 6 cm²

Fig 4. Transient thermal impedance from junction to ambient as a function of pulse duration for; typical values

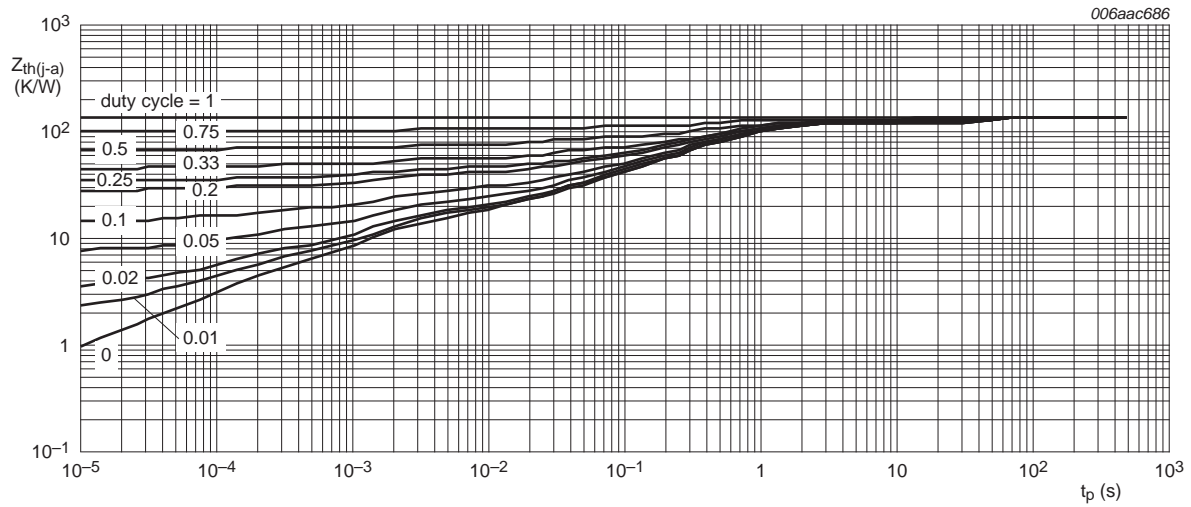


Fig 5. Transient thermal impedance from junction to ambient as a function of pulse duration for; typical values

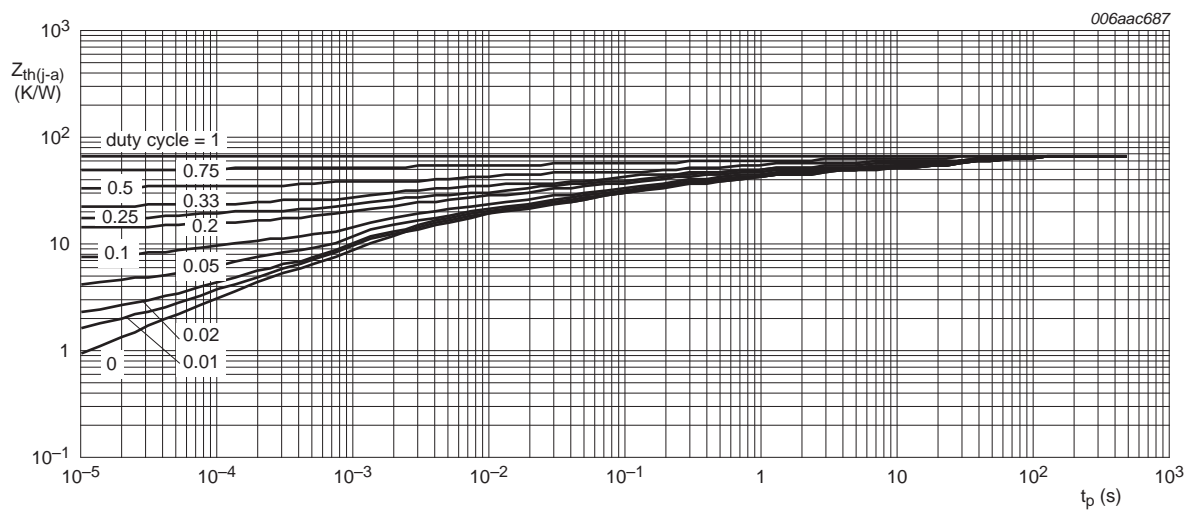




Fig 6. Transient thermal impedance from junction to ambient as a function of pulse duration for; typical values


7. Characteristics

Table 7. Characteristics
 $T_{amb} = 25\text{ °C}$ unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
I_{CBO}	collector-base cut-off current	$V_{CB} = -25\text{ V}; I_E = 0\text{ A}$	-	-	-100	nA
		$V_{CB} = -25\text{ V}; I_E = 0\text{ A}; T_j = 150\text{ °C}$	-	-	-10	μA
I_{EBO}	emitter-base cut-off current	$V_{EB} = -5\text{ V}; I_C = 0\text{ A}$	-	-	-100	nA
h_{FE}	DC current gain	$V_{CE} = -10\text{ V}; I_C = -5\text{ mA}$	50	-	-	
		$V_{CE} = -1\text{ V}; I_C = -500\text{ mA}$	[1]	85	-	375
		$V_{CE} = -1\text{ V}; I_C = -1\text{ A}$	[1]	60	-	-
		$V_{CE} = -1\text{ V}; I_C = -2\text{ A}$	[1]	40	-	-
	h_{FE} selection-16	$V_{CE} = -1\text{ V}; I_C = -500\text{ mA}$	[1]	100	-	250
h_{FE} selection-25	$V_{CE} = -1\text{ V}; I_C = -500\text{ mA}$	[1]	160	-	375	
V_{CEsat}	collector-emitter saturation voltage	$I_C = -1\text{ A}; I_B = -100\text{ mA}$	[1]	-	-0.5	V
		$I_C = -2\text{ A}; I_B = -200\text{ mA}$	[1]	-	-0.6	V
V_{BE}	base-emitter voltage	$I_C = -5\text{ mA}; V_{CE} = -10\text{ V}$	[1]	-	-0.7	V
		$I_C = -1\text{ A}; V_{CE} = -1\text{ V}$	[1]	-	-1	V
f_T	transition frequency	$V_{CE} = -5\text{ V}; I_C = -50\text{ mA}; f = 100\text{ MHz}$	40	140	-	MHz
C_c	collector capacitance	$V_{CB} = -10\text{ V}; I_E = I_e = 0\text{ A}; f = 1\text{ MHz}$	-	28	-	pF


[1] Pulse test: $t_p \leq 300\text{ ms}; \delta \leq 0.02$

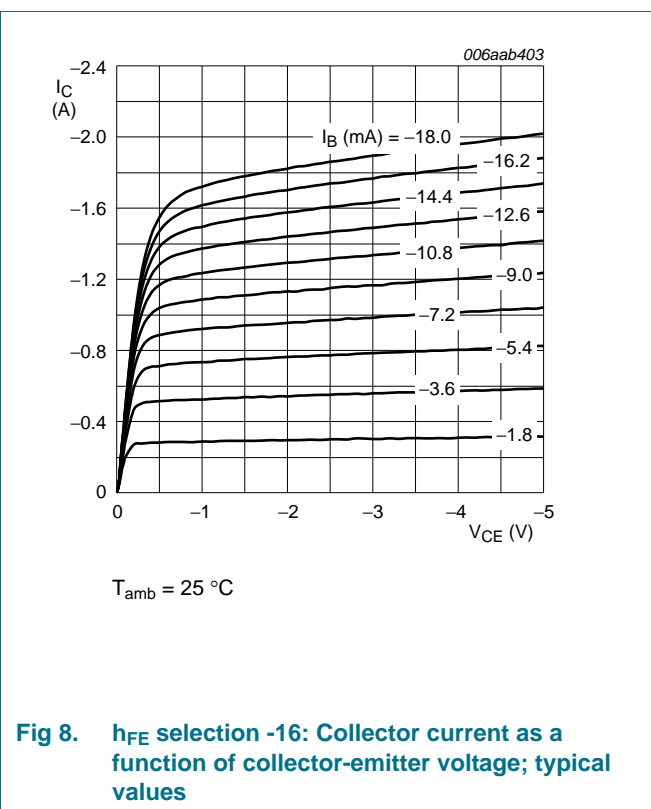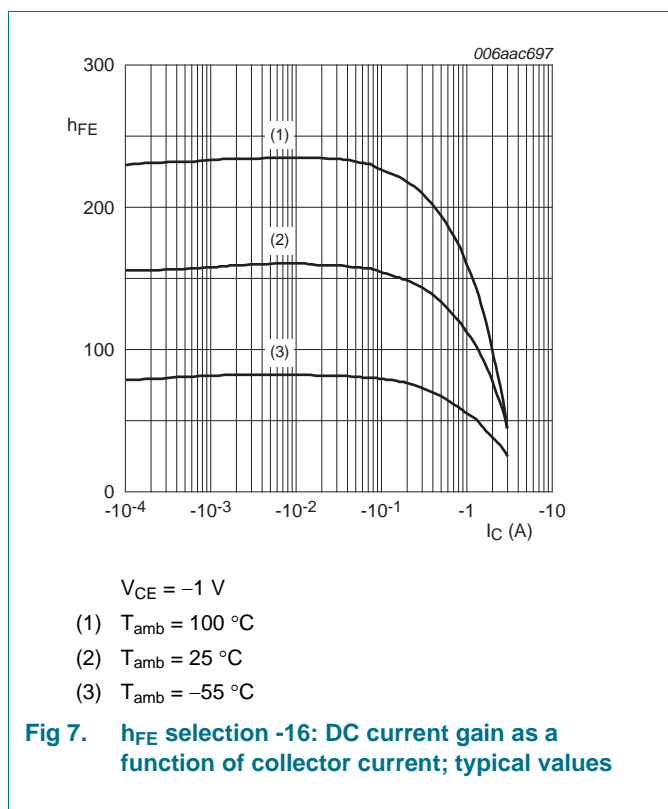

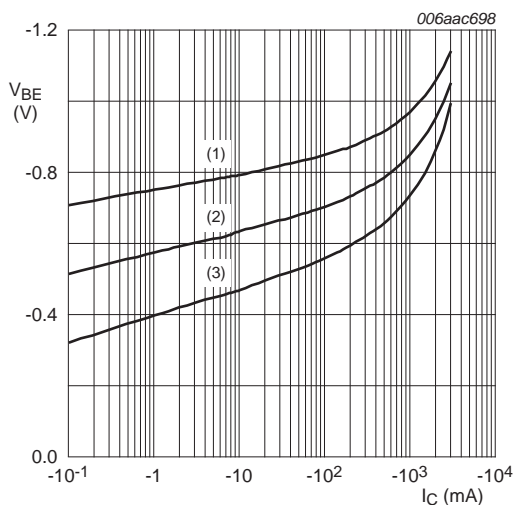


$V_{CE} = -1\text{ V}$
 (1) $T_{amb} = -55\text{ °C}$
 (2) $T_{amb} = 25\text{ °C}$
 (3) $T_{amb} = 100\text{ °C}$

Fig 9. h_{FE} selection -16: Base-emitter voltage as a function of collector current; typical values

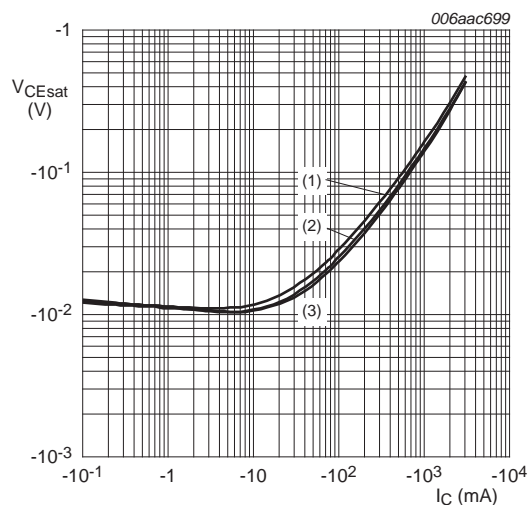


$I_C/I_B = 10$
 (1) $T_{amb} = 100\text{ °C}$
 (2) $T_{amb} = 25\text{ °C}$
 (3) $T_{amb} = -55\text{ °C}$

Fig 10. h_{FE} selection -16: Collector-emitter saturation voltage as a function of collector current; typical values

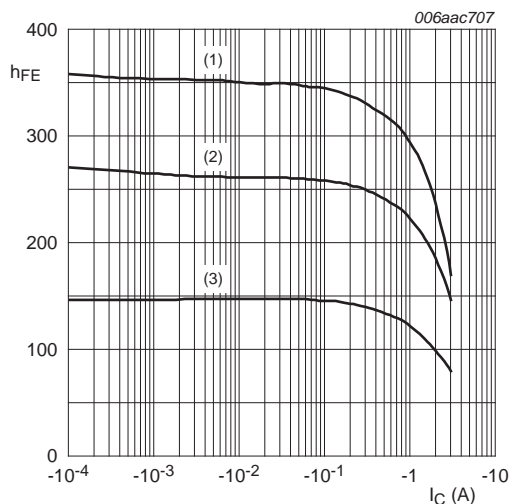


$V_{CE} = -1\text{ V}$
 (1) $T_{amb} = 100\text{ °C}$
 (2) $T_{amb} = 25\text{ °C}$
 (3) $T_{amb} = -55\text{ °C}$

Fig 11. h_{FE} selection -25: DC current gain as a function of collector current; typical values

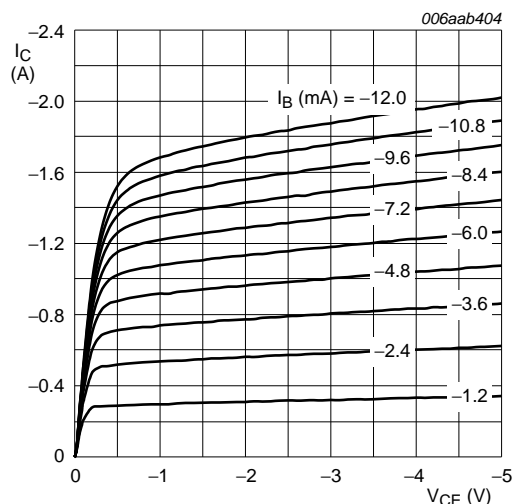

$T_{amb} = 25\text{ °C}$


Fig 12. h_{FE} selection -25: Collector current as a function of collector-emitter voltage; typical values

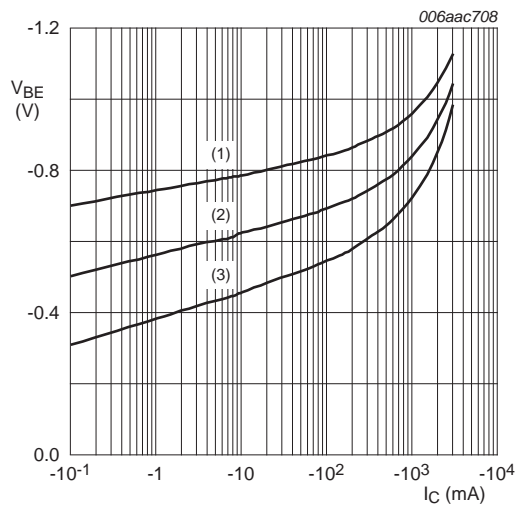

$$V_{CE} = -1 \text{ V}$$

- (1) $T_{amb} = -55 \text{ }^{\circ}\text{C}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C}$
- (3) $T_{amb} = 100 \text{ }^{\circ}\text{C}$

Fig 13. h_{FE} selection -25: Base-emitter voltage as a function of collector current; typical values

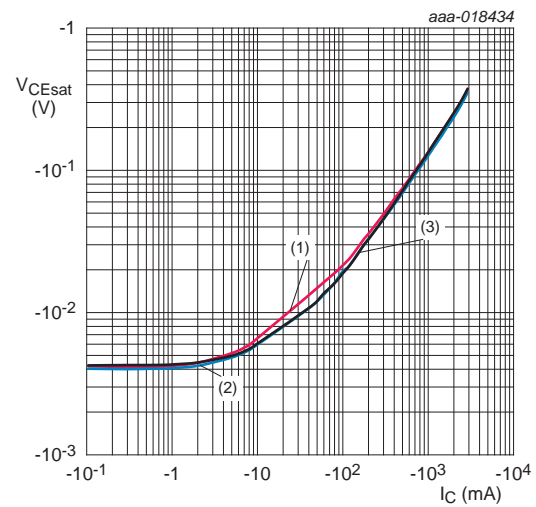

$$I_C/I_B = 10$$

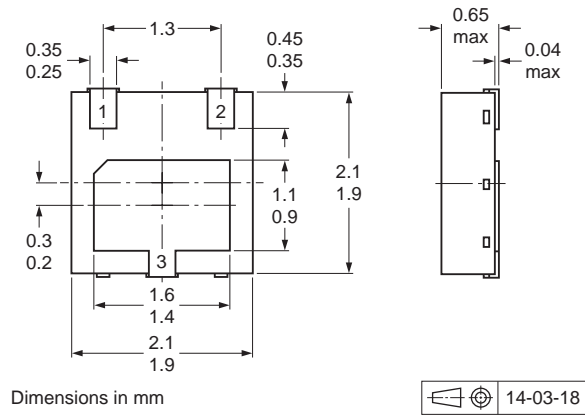
- (1) $T_{amb} = 100 \text{ }^{\circ}\text{C}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C}$
- (3) $T_{amb} = -55 \text{ }^{\circ}\text{C}$

Fig 14. h_{FE} selection -25: Collector-emitter saturation voltage as a function of collector current; typical values


8. Test information

8.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard Q101 - *Stress test qualification for discrete semiconductors*, and is suitable for use in automotive applications.

9. Package outline**Fig 15. Package outline DFN2020D-3 (SOT1061D)**

10. Soldering

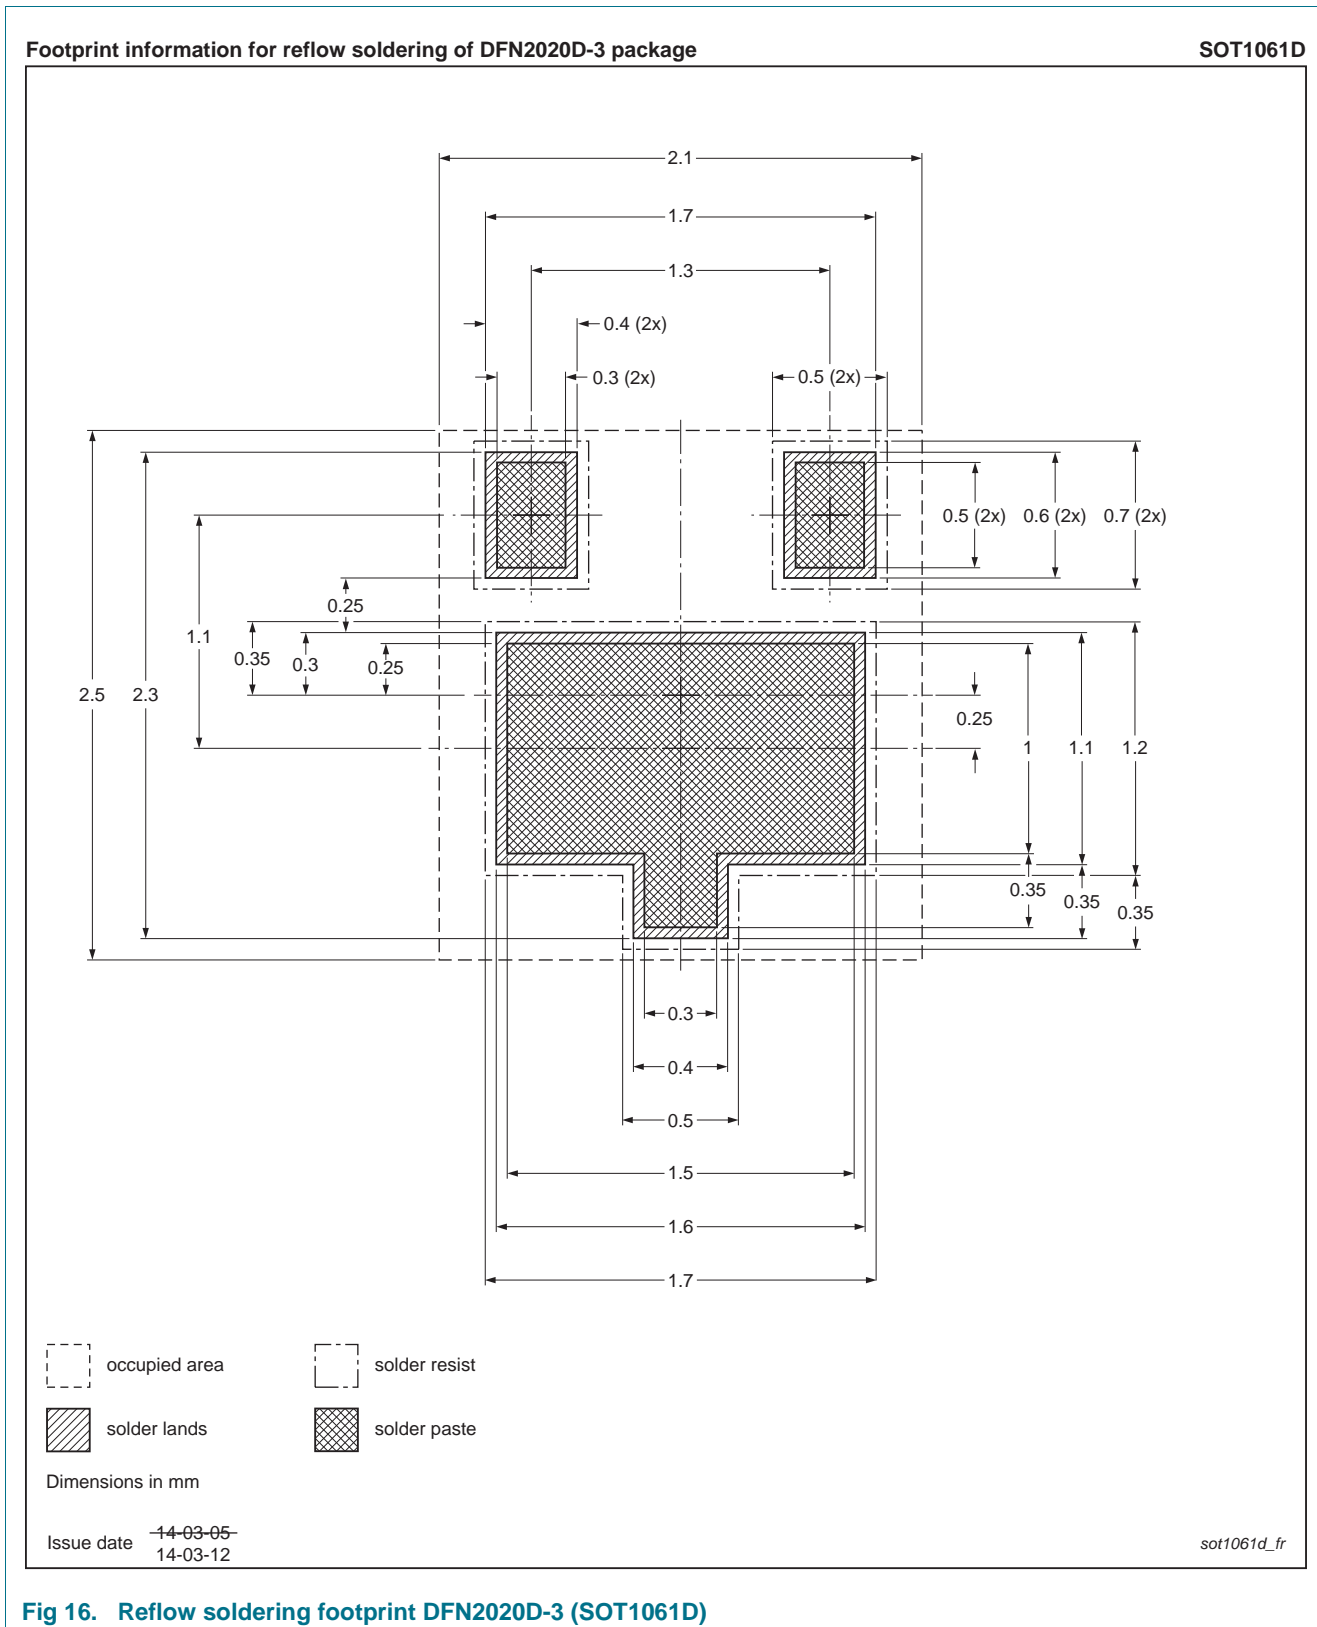

11. Revision history

Table 8. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
BC69PAS_SER v.1	20150619	Product data sheet	-	-

12. Legal information

12.1 Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nexperia.com>.

12.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

12.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

13. Contents

1	Product profile	1
1.1	General description	1
1.2	Features and benefits	1
1.3	Applications	1
1.4	Quick reference data	1
2	Pinning information	2
3	Ordering information	2
4	Marking	2
5	Limiting values	2
6	Thermal characteristics	4
7	Characteristics	7
8	Test information	9
8.1	Quality information	9
9	Package outline	10
10	Soldering	11
11	Revision history	12
12	Legal information	13
12.1	Data sheet status	13
12.2	Definitions	13
12.3	Disclaimers	13
12.4	Trademarks	14
13	Contents	15

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© Nexperia B.V. 2015.

All rights reserved.

For more information, please visit: <http://www.nexperia.com>
For sales office addresses, please send an email to:
salesaddresses@nexperia.com

Date of release: 19 June 2015
Document identifier: BC69PAS_SER

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.