


SPB80N03S2L-03 G Datasheet

www.digi-electronics.com

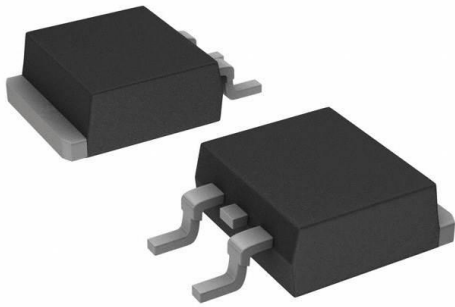

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	SPB80N03S2L-03 G-DG
Manufacturer	Infineon Technologies
Manufacturer Product Number	SPB80N03S2L-03 G
Description	MOSFET N-CH 30V 80A TO263-3
Detailed Description	N-Channel 30 V 80A (Tc) 300W (Tc) Surface Mount P G-TO263-3-2



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

SPB80N03S2L-03 G

Series:

OptiMOS™

FET Type:

N-Channel

Drain to Source Voltage (Vdss):

30 V

Drive Voltage (Max Rds On, Min Rds On):

4.5V, 10V

Vgs(th) (Max) @ Id:

2V @ 250µA

Vgs (Max):

±20V

FET Feature:

-

Operating Temperature:

-55°C ~ 175°C (Tj)

Supplier Device Package:

PG-T0263-3-2

Base Product Number:

SPB80N

Manufacturer:

Infineon Technologies

Product Status:

Obsolete

Technology:

MOSFET (Metal Oxide)

Current - Continuous Drain (Id) @ 25°C:

80A (Tc)

Rds On (Max) @ Id, Vgs:

2.8mOhm @ 80A, 10V

Gate Charge (Qg) (Max) @ Vgs:

220 nC @ 10 V

Input Capacitance (Ciss) (Max) @ Vds:

8180 pF @ 25 V

Power Dissipation (Max):

300W (Tc)

Mounting Type:

Surface Mount

Package / Case:

TO-263-3, D2PAK (2 Leads + Tab), TO-263AB

Environmental & Export classification

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

REACH Status:

REACH Unaffected

HTSUS:

8541.29.0095



SPI80N03S2L-03
SPP80N03S2L-03, SPB80N03S2L-03

OptiMOS® Power-Transistor

Feature

- N-Channel
- Enhancement mode
- Logic Level
- Excellent Gate Charge x $R_{DS(on)}$ product (FOM)
- Superior thermal resistance
- 175°C operating temperature
- Avalanche rated
- dv/dt rated


Product Summary

V_{DS}	30	V
$R_{DS(on)}$ max. SMD version	2.8	m Ω
I_D	80	A


P- TO262 -3-1

P- TO263 -3-2

P- TO220 -3-1

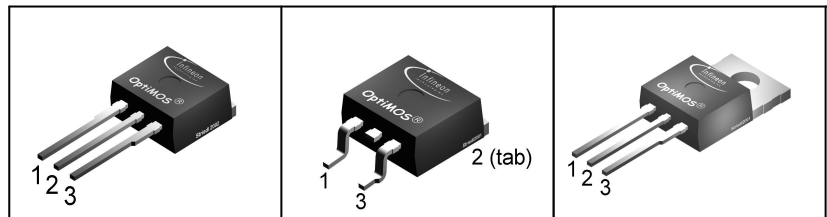

Type	Package	Ordering Code	Marking
SPP80N03S2L-03	P- TO220 -3-1	Q67040-S4248	2N03L03
SPB80N03S2L-03	P- TO263 -3-2	Q67040-S4259	2N03L03
SPI80N03S2L-03	P- TO262 -3-1	Q67042-S4078	2N03L03



Maximum Ratings, at $T_j = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current 1) $T_C=25^\circ\text{C}$	I_D	80 80	A
Pulsed drain current $T_C=25^\circ\text{C}$	$I_{D \text{ puls}}$	320	
Avalanche energy, single pulse $I_D=80 \text{ A}$, $V_{DS}=25\text{V}$, $R_{GS}=25\Omega$	E_{AS}	810	mJ
Repetitive avalanche energy, limited by $T_{jmax}^{2)}$	E_{AR}	30	
Reverse diode dv/dt $I_S=80\text{A}$, $V_{DS}=24\text{V}$, $di/dt=200\text{A}/\mu\text{s}$, $T_{jmax}=175^\circ\text{C}$	dv/dt	6	kV/ μs
Gate source voltage	V_{GS}	± 20	V
Power dissipation $T_C=25^\circ\text{C}$	P_{tot}	300	W
Operating and storage temperature	T_j, T_{stg}	-55... +175	$^\circ\text{C}$
IEC climatic category; DIN IEC 68-1		55/175/56	


Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics					
Thermal resistance, junction - case	R_{thJC}	-	0.3	0.5	K/W
Thermal resistance, junction - ambient, leaded	R_{thJA}	-	-	62	
SMD version, device on PCB: @ min. footprint @ 6 cm ² cooling area ³⁾	R_{thJA}	-	-	62 40	

Electrical Characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Drain-source breakdown voltage $V_{GS}=0V, I_D=1mA$	$V_{(BR)DSS}$	30	-	-	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D=250\mu A$	$V_{GS(th)}$	1.2	1.6	2	
Zero gate voltage drain current $V_{DS}=30V, V_{GS}=0V, T_j=25^\circ C$ $V_{DS}=30V, V_{GS}=0V, T_j=125^\circ C$	I_{DSS}	-	0.01 1	1 100	μA
Gate-source leakage current $V_{GS}=20V, V_{DS}=0V$	I_{GSS}	-	1	100	nA
Drain-source on-state resistance $V_{GS}=4.5V, I_D=80A$ $V_{GS}=4.5V, I_D=80A, \text{SMD version}$	$R_{DS(on)}$	-	2.9 2.3	3.8 3.5	$m\Omega$
Drain-source on-state resistance 4) $V_{GS}=10V, I_D=80A$ $V_{GS}=10V, I_D=80A, \text{SMD version}$	$R_{DS(on)}$	-	2.3 2	3.1 2.8	

¹Current limited by bondwire ; with an $R_{thJC} = 0.5K/W$ the chip is able to carry $I_D= 255A$ at $25^\circ C$, for detailed information see app.-note ANPS071E available at www.infineon.com/optimos

²Defined by design. Not subject to production test.

³Device on 40mm*40mm*1.5mm epoxy PCB FR4 with 6 cm² (one layer, 70 μm thick) copper area for drain connection. PCB is vertical without blown air.

⁴Diagrams are related to straight lead versions


Electrical Characteristics

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Dynamic Characteristics

Transconductance	g_{fs}	$V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}$, $I_D = 80A$	93	185	-	S
Input capacitance	C_{iss}	$V_{GS} = 0V$, $V_{DS} = 25V$, $f = 1MHz$	-	6150	8180	pF
Output capacitance	C_{oss}		-	2400	3190	
Reverse transfer capacitance	C_{rss}		-	540	810	
Gate resistance	R_G		-	2.5	-	Ω
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 15V$, $V_{GS} = 10V$, $I_D = 40A$, $R_G = 1.1\Omega$	-	11.8	17.7	ns
Rise time	t_r		-	34	51	
Turn-off delay time	$t_{d(off)}$		-	99	148	
Fall time	t_f		-	90	135	

Gate Charge Characteristics

Gate to source charge	Q_{gs}	$V_{DD} = 24V$, $I_D = 80A$	-	19	26	nC
Gate to drain charge	Q_{gd}		-	57	86	
Gate charge total	Q_g	$V_{DD} = 24V$, $I_D = 80A$, $V_{GS} = 0$ to $10V$	-	166	220	
Gate plateau voltage	$V_{(plateau)}$	$V_{DD} = 24V$, $I_D = 80A$	-	2.9	-	V

Reverse Diode


Inverse diode continuous forward current	I_S	$T_C = 25^\circ C$	-	-	80	A
Inv. diode direct current, pulsed	I_{SM}		-	-	320	
Inverse diode forward voltage	V_{SD}	$V_{GS} = 0V$, $I_F = 80A$	-	1	1.3	V
Reverse recovery time	t_{rr}	$V_R = 15V$, $I_F = I_S$, $di_F/dt = 100A/\mu s$	-	65	80	ns
Reverse recovery charge	Q_{rr}		-	87	108	



1 Power dissipation

$P_{tot} = f(T_C)$


parameter: $V_{GS} \geq 4\text{ V}$

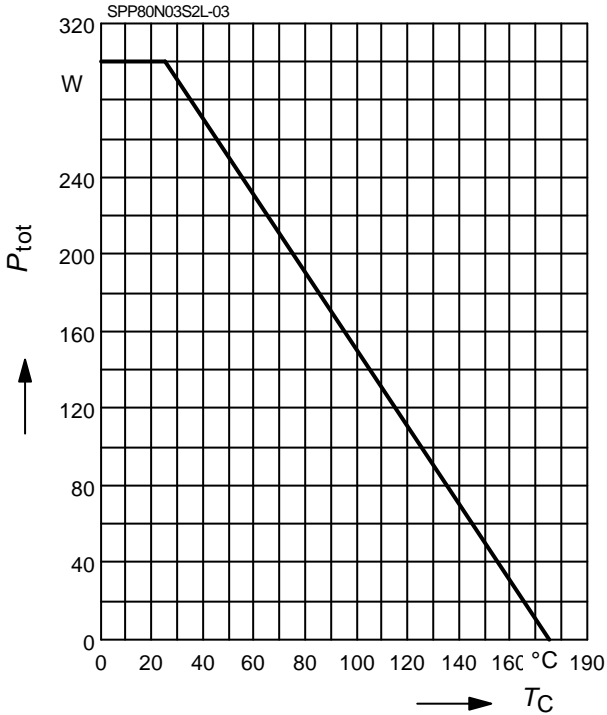

2 Drain current

$I_D = f(T_C)$


parameter: $V_{GS} \geq 10\text{ V}$

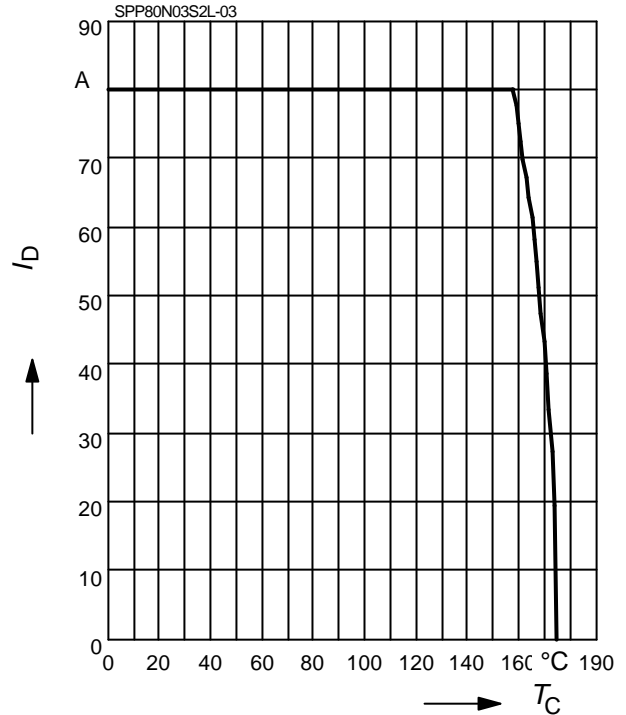

3 Safe operating area

$I_D = f(V_{DS})$


parameter: $D = 0, T_C = 25\text{ °C}$

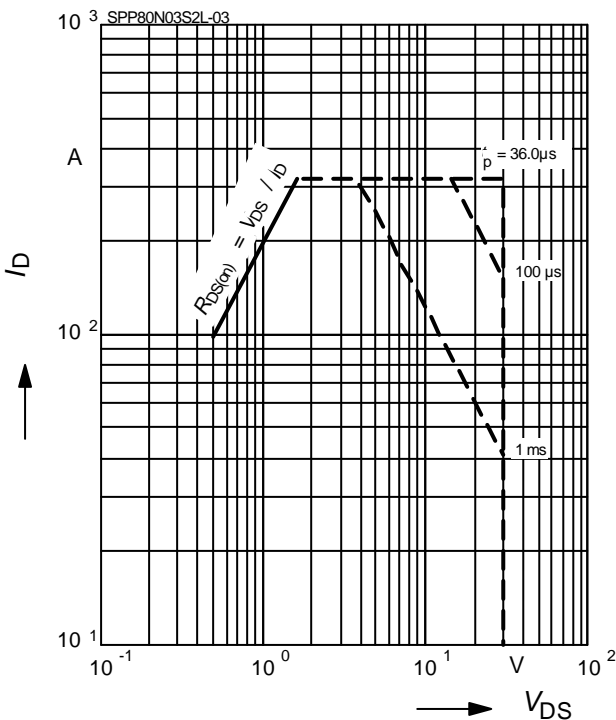

4 Max. transient thermal impedance

$Z_{thJC} = f(t_p)$

parameter: $D = t_p/T$

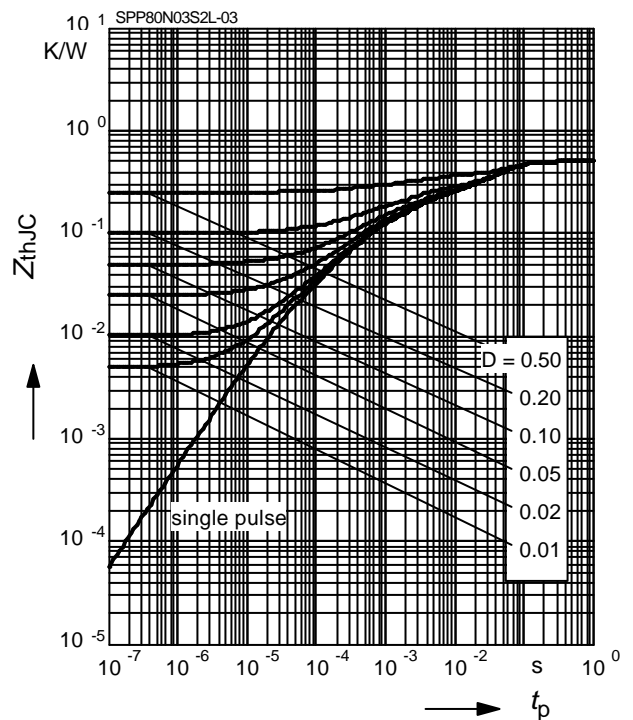




5 Typ. output characteristic

$I_D = f(V_{DS}); T_J = 25^\circ\text{C}$


parameter: $t_p = 80 \mu\text{s}$

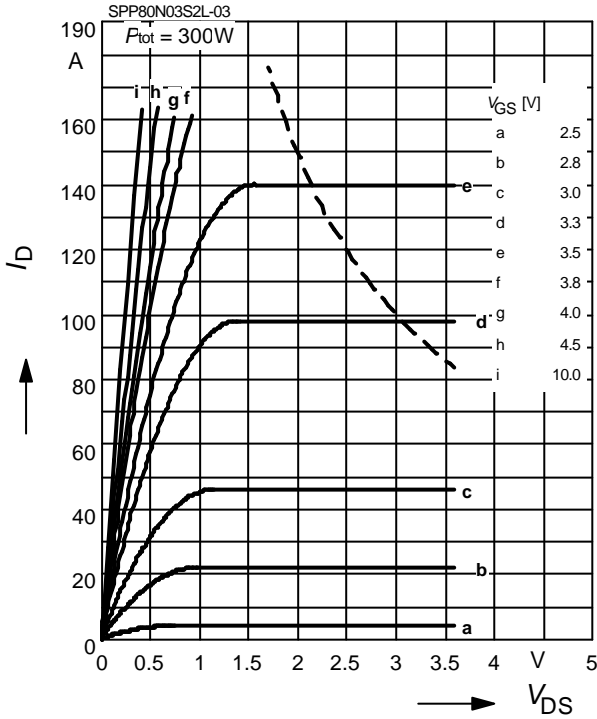

6 Typ. drain-source on resistance

$R_{DS(on)} = f(I_D)$


parameter: V_{GS}

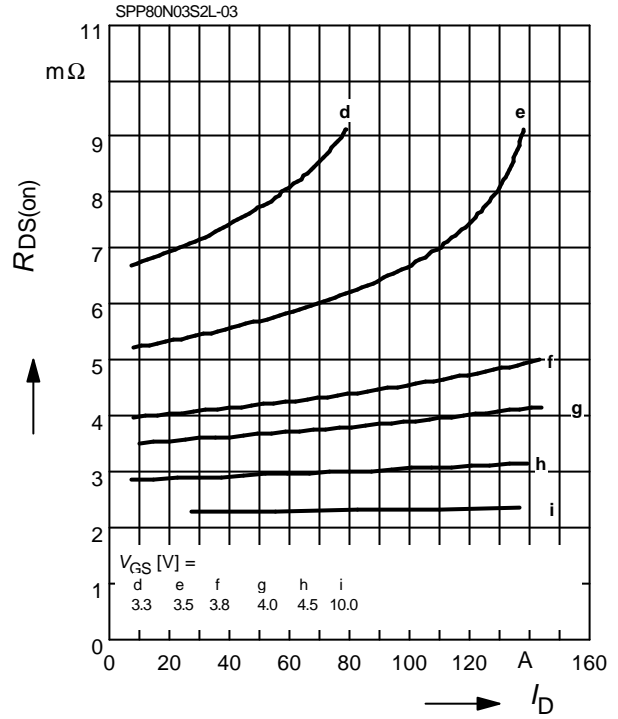

7 Typ. transfer characteristics

$I_D = f(V_{GS}); V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$


parameter: $t_p = 80 \mu\text{s}$

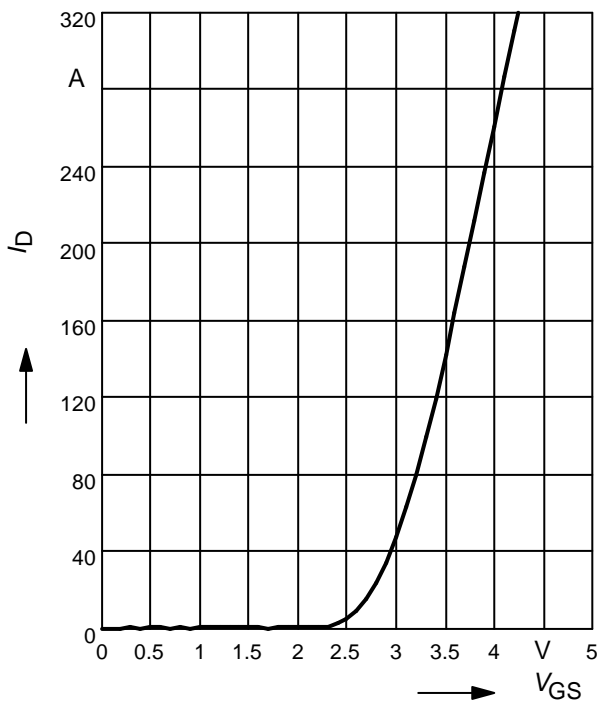

8 Typ. forward transconductance

$g_{fs} = f(I_D); T_J = 25^\circ\text{C}$

parameter: g_{fs}

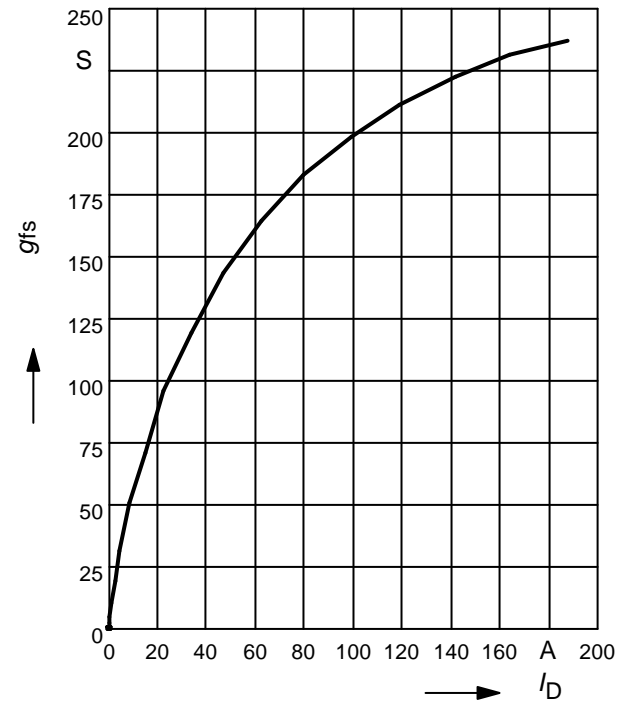




9 Drain-source on-state resistance

$R_{DS(on)} = f(T_j)$


parameter : $I_D = 80\text{ A}$, $V_{GS} = 10\text{ V}$

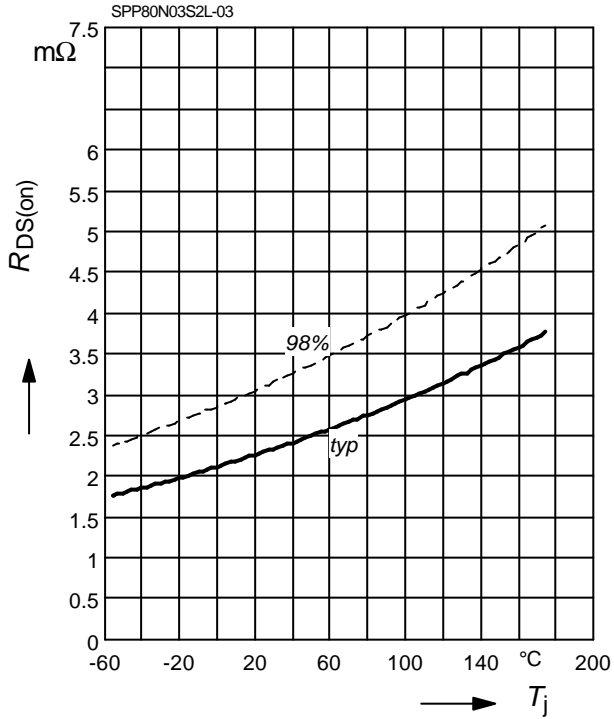

10 Typ. gate threshold voltage

$V_{GS(th)} = f(T_j)$


parameter: $V_{GS} = V_{DS}$

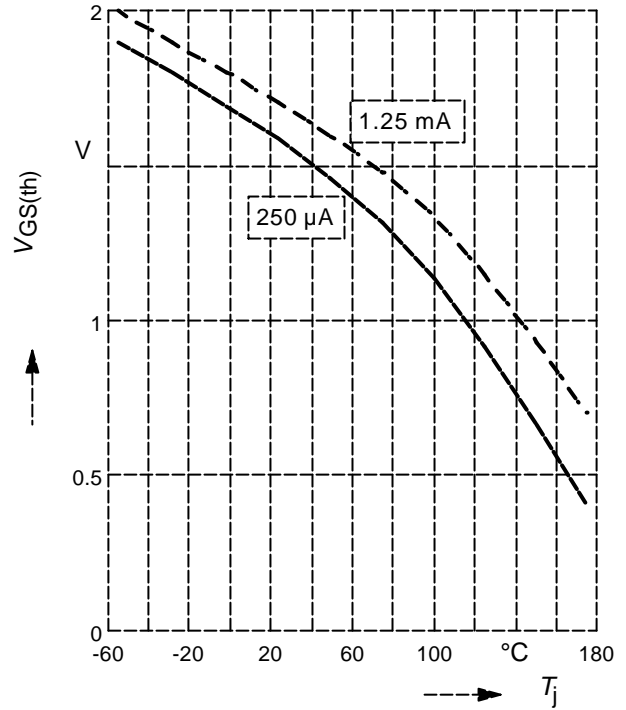

11 Typ. capacitances

$C = f(V_{DS})$


parameter: $V_{GS}=0\text{V}$, $f=1\text{ MHz}$

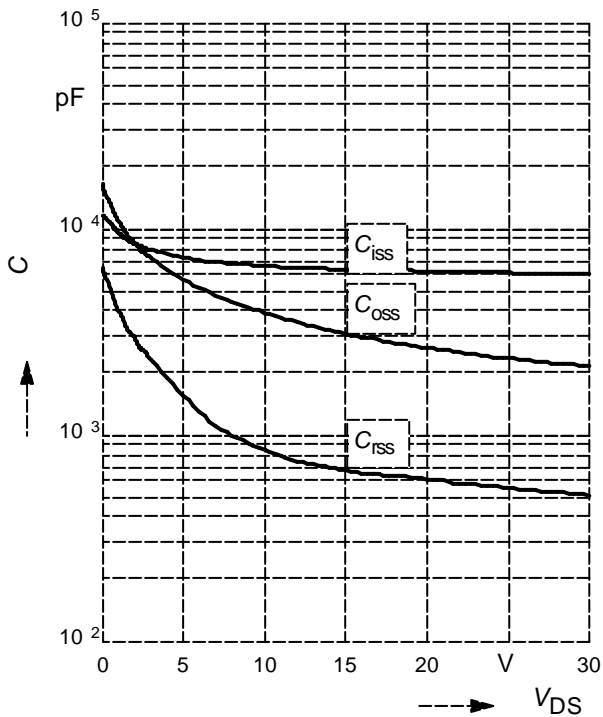

12 Forward character. of reverse diode

$I_F = f(V_{SD})$

parameter: T_j , $t_p = 80\text{ μs}$

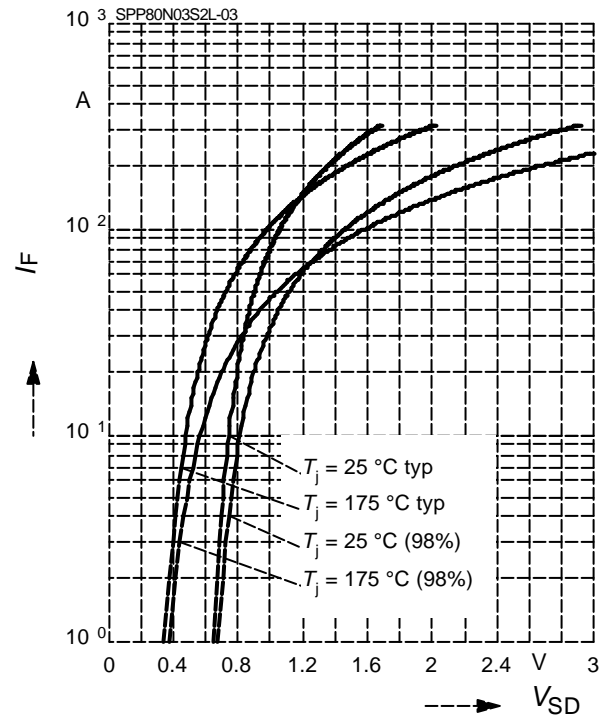




13 Typ. avalanche energy

$E_{AS} = f(T_j)$


par.: $I_D = 80\text{ A}$, $V_{DD} = 25\text{ V}$, $R_{GS} = 25\ \Omega$

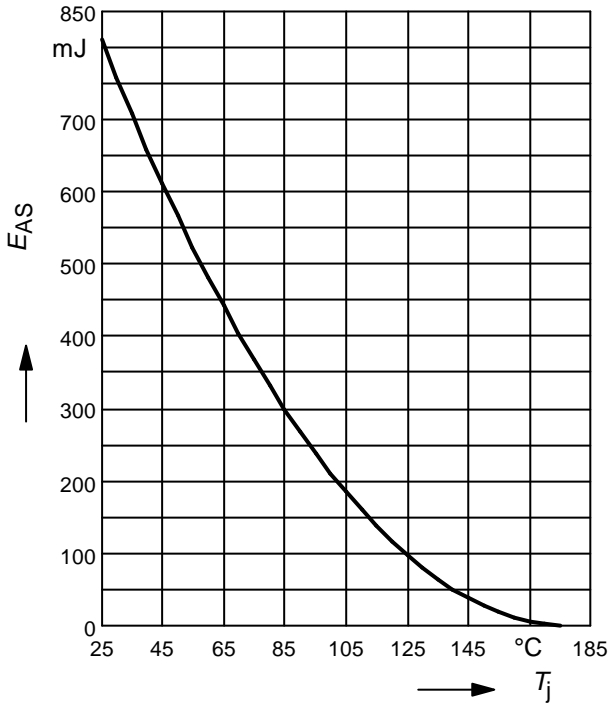

14 Typ. gate charge

$V_{GS} = f(Q_{Gate})$


parameter: $I_D = 80\text{ A}$ pulsed

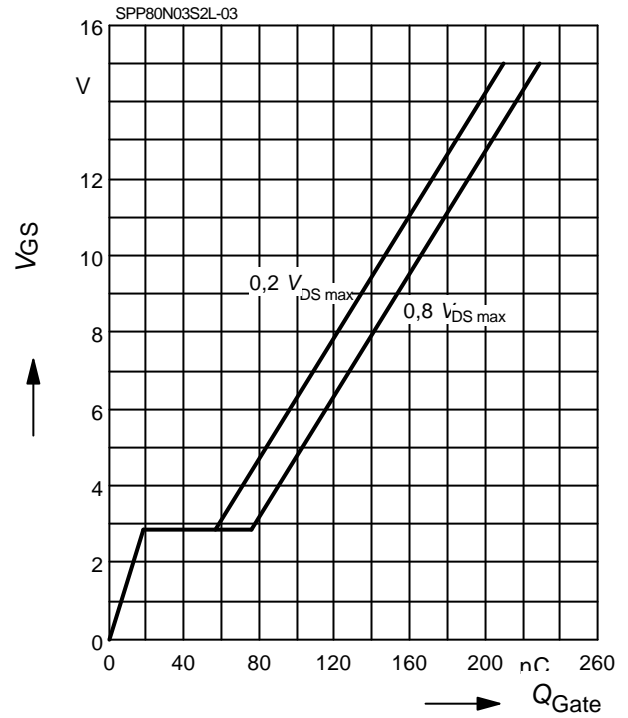

15 Drain-source breakdown voltage

$V_{(BR)DSS} = f(T_j)$

parameter: $I_D = 10\text{ mA}$

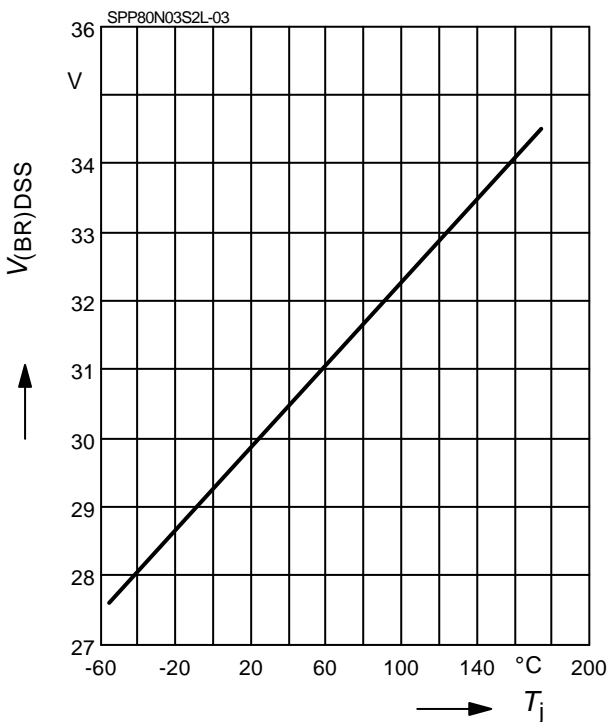



Published by
Infineon Technologies AG,
Bereichs Kommunikation
St.-Martin-Strasse 53,
D-81541 München
© Infineon Technologies AG 1999
All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

Warnings

Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Further information

Please notice that the part number is BSPP80N03S2L-03, BSPB80N03S2L-03 and BSPI80N03S2L-03, for simplicity the device is referred to by the term SPP80N03S2L-03, SPB80N03S2L-03 and SPI80N03S2L-03 throughout this documentation

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.