


# TOP223PN Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)

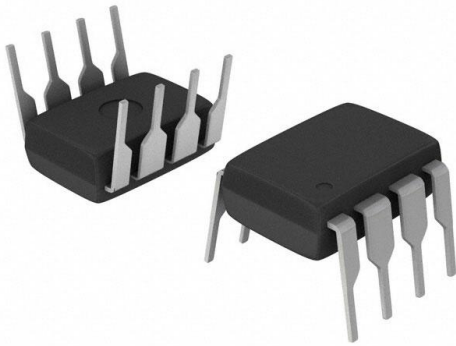

<https://www.DiGi-Electronics.com>

|                              |  |
|------------------------------|--|
| DiGi Electronics Part Number | TOP223PN-DG  |
| Manufacturer                 | <a href="#">Power Integrations</a>                                     |
| Manufacturer Product Number  | TOP223PN   |
| Description                  | IC OFFLINE SWITCH MULT TOP 8DIP  |
| Detailed Description         | Converter Offline Boost, Buck, Flyback, Forward Topology 100kHz 8-PDIP |

This model TOP223PN is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

TOP223PN

Series:

TOPSwitch®-II

Output Isolation:

Isolated

Voltage - Breakdown:

700V

Voltage - Supply (Vcc/Vdd):

-

Frequency - Switching:

100kHz

Fault Protection:

Current Limiting, Over Temperature

Operating Temperature:

-40°C ~ 150°C (Tj)

Supplier Device Package:

8-PDIP

Base Product Number:

TOP223

Manufacturer:

Power Integrations

Product Status:

Not For New Designs

Internal Switch(s):

Yes

Topology:

Boost, Buck, Flyback, Forward

Duty Cycle:

67%

Power (Watts):

25 W

Control Features:

-

Package / Case:

8-DIP (0.300", 7.62mm)

Mounting Type:

Through Hole

## Environmental & Export classification

RoHS Status:

RoHS Compliant

REACH Status:

REACH Unaffected

HTSUS:

8542.39.0001

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

This product is not recommended for new designs.

# TOP221-227 TOPSwitch-II Family


## Three-Terminal Off-Line PWM Switch

### Product Highlights

- Lowest cost, lowest component count switcher solution
- Cost competitive with linears above 5 W
- Very low AC/DC losses – up to 90% efficiency
- Built-in Auto-restart and Current limiting
- Latching Thermal shutdown for system level protection
- Implements Flyback, Forward, Boost or Buck topology
- Works with primary or opto feedback
- Stable in discontinuous or continuous conduction mode
- Source connected tab for low EMI
- Circuit simplicity and Design Tools reduce time to market

### Description

The second generation TOPSwitch™-II family is more cost effective and provides several enhancements over the first generation TOPSwitch family. The TOPSwitch-II family extends the power range from 100W to 150W for 100/115/230 VAC input and from 50W to 90W for 85-265 VAC universal input. This brings TOPSwitch technology advantages to many new applications, i.e. TV, Monitor, Audio amplifiers, etc. Many significant circuit enhancements that reduce the sensitivity to board layout and line transients now make the design even easier. The standard 8L PDIP package option

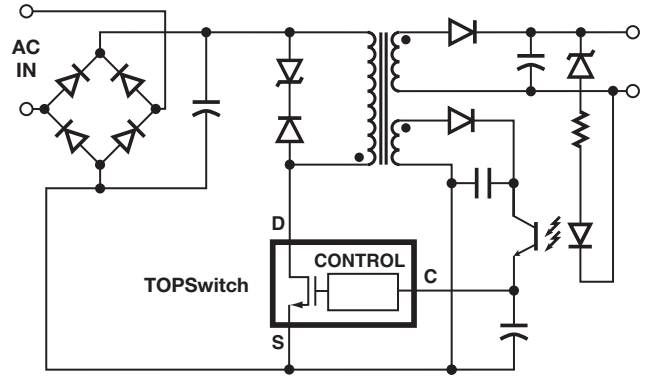

PI-1951-091996


Figure 1. Typical Flyback Application.

reduces cost in lower power, high efficiency applications. The internal lead frame of this package uses six of its pins to transfer heat from the chip directly to the board, eliminating the cost of a heat sink. TOPSwitch incorporates all functions necessary for a switched mode control system into a three terminal monolithic IC: power MOSFET, PWM controller, high voltage start up circuit, loop compensation and fault protection circuitry.

| Output Power Table              |   |                                   |  |   |                                   |
|---------------------------------|---|-----------------------------------|--|---|-----------------------------------|
| TO-220 (Y) Package <sup>1</sup> |   |                                   | 8L PDIP (P) or 8L SMD (G) Package <sup>2</sup> |   |                                   |
| PART ORDER NUMBER               | Single Voltage Input <sup>3</sup><br>100/115/230 VAC ±15% | Wide Range Input<br>85 to 265 VAC | PART ORDER NUMBER                              | Single Voltage Input <sup>3</sup><br>100/115/230 VAC ±15% | Wide Range Input<br>85 to 265 VAC |
|                                 | $P_{MAX}^{4,6}$   | $P_{MAX}^{4,6}$                   |  | $P_{MAX}^{5,6}$   | $P_{MAX}^{5,6}$                   |
| TOP221YN                        | 12 W  | 7 W                               | TOP221PN or TOP221GN                           | 9 W   | 6 W                               |
| TOP222YN                        | 25 W  | 15 W                              | TOP222PN or TOP222GN                           | 15 W  | 10 W                              |
| TOP223YN                        | 50 W  | 30 W                              | TOP223PN or TOP223GN                           | 25 W  | 15 W                              |
| TOP224YN                        | 75 W  | 45 W                              | TOP224PN or TOP224GN                           | 30 W  | 20 W                              |
| TOP225YN                        | 100 W   | 60 W                              |  |   |                                   |
| TOP226YN                        | 125 W   | 75 W                              |  |   |                                   |
| TOP227YN                        | 150 W   | 90 W                              |  |   |                                   |

Notes: **1.** Package outline: TO-220/3 **2.** Package Outline: DIP-8 or SMD-8 **3.** 100/115 VAC with doubler input **4.** Assumes appropriate heat sinking to keep the maximum TOPSwitch junction temperature below 100 °C. **5.** Soldered to 1 sq. in. (6.45 cm<sup>2</sup>), 2 oz. copper clad (610 gm/m<sup>2</sup>) **6.**  $P_{MAX}$  is the maximum practical continuous power output level for conditions shown. The continuous power capability in a given application depends on thermal environment, transformer design, efficiency required, minimum specified input voltage, input storage capacitance, etc. **7.** Refer to key application considerations section when using TOPSwitch-II in an existing TOPSwitch design.

## TOP221-227

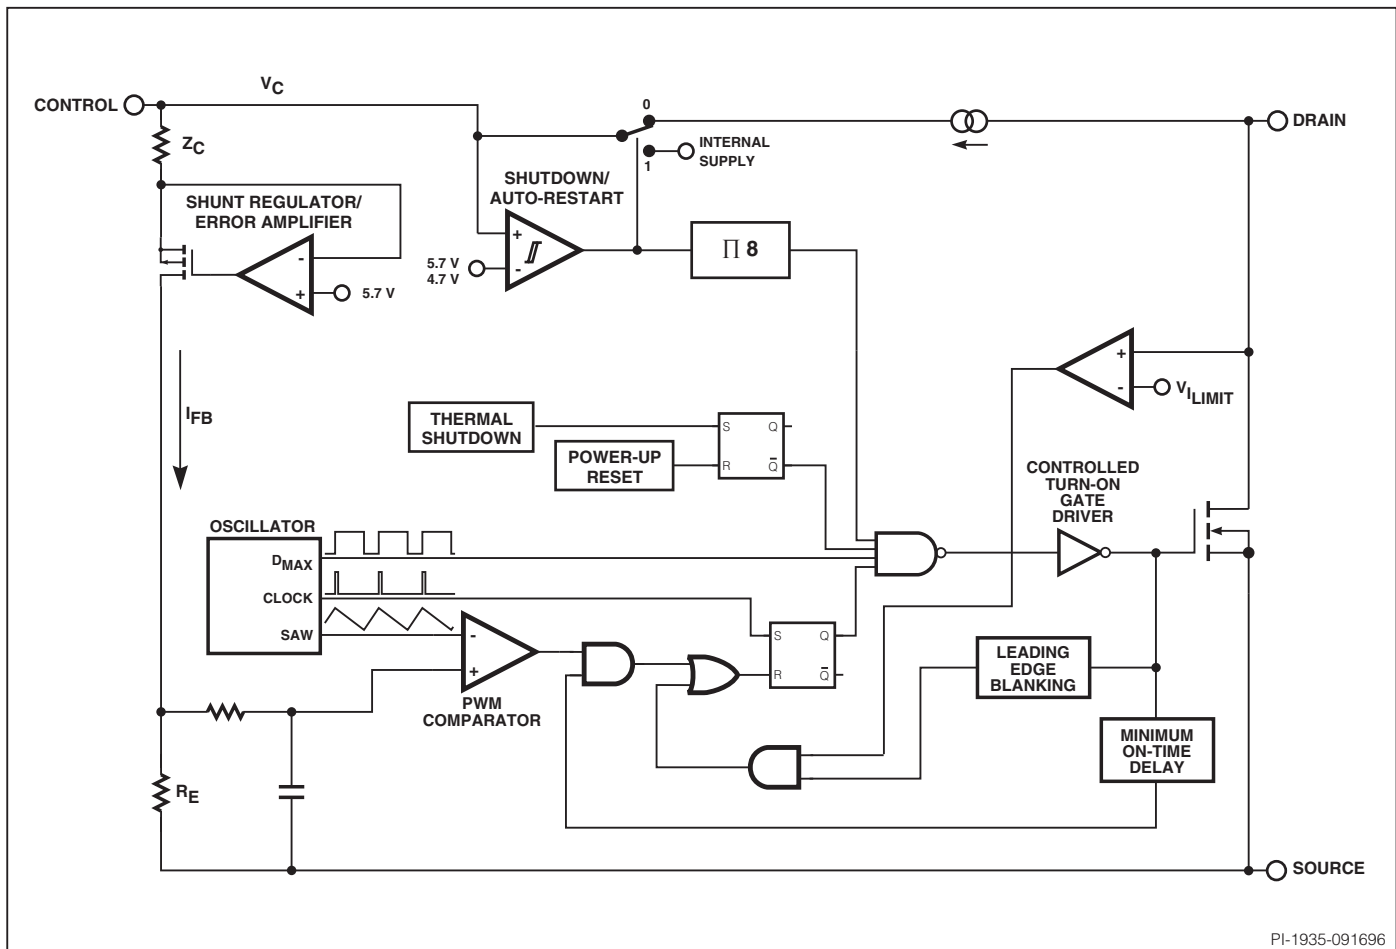

PI-1935-091696

Figure 2. Functional Block Diagram.

## Pin Functional Description

**DRAIN Pin:**

Output MOSFET drain connection. Provides internal bias current during start-up operation via an internal switched high-voltage current source. Internal current sense point.

**CONTROL Pin:**

Error amplifier and feedback current input pin for duty cycle control. Internal shunt regulator connection to provide internal bias current during normal operation. It is also used as the connection point for the supply bypass and auto-restart/compensation capacitor.


**SOURCE Pin:**

YN package – Output MOSFET source connection for high voltage power return. Primary side circuit common and reference point.

PN and GN package – Primary-side control circuit common and reference point.

**SOURCE (HV RTN) Pin: (P and G package only)**

Output MOSFET source connection for high voltage power return.

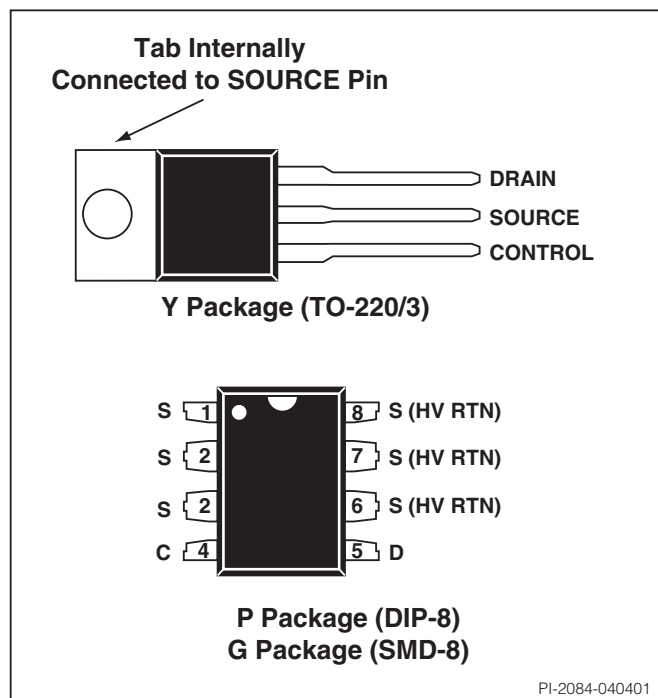

PI-2084-040401

Figure 3. Pin Configuration.

## TOPSwitch-II Family Functional Description

TOPSwitch is a self biased and protected linear control current-to-duty cycle converter with an open drain output. High efficiency is achieved through the use of CMOS and integration of the maximum number of functions possible. CMOS process significantly reduces bias currents as compared to bipolar or discrete solutions. Integration eliminates external power resistors used for current sensing and/or supplying initial start-up bias current.

During normal operation, the duty cycle of the internal output MOSFET decreases linearly with increasing CONTROL pin current as shown in Figure 4. To implement all the required control, bias, and protection functions, the DRAIN and CONTROL pins each perform several functions as described below. Refer to Figure 2 for a block diagram and to Figure 6 for timing and voltage waveforms of the TOPSwitch integrated circuit.


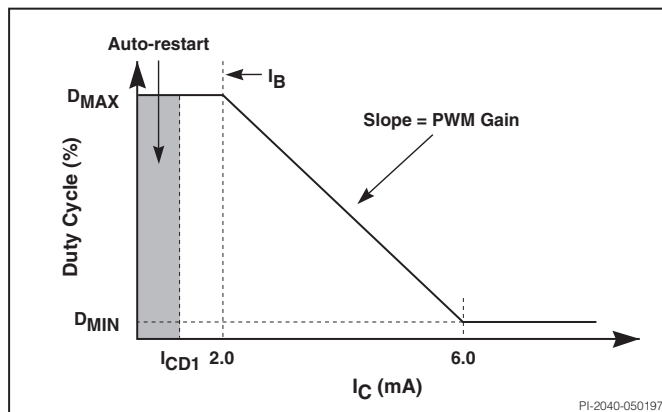


Figure 4. Relationship of Duty Cycle to CONTROL Pin Current.

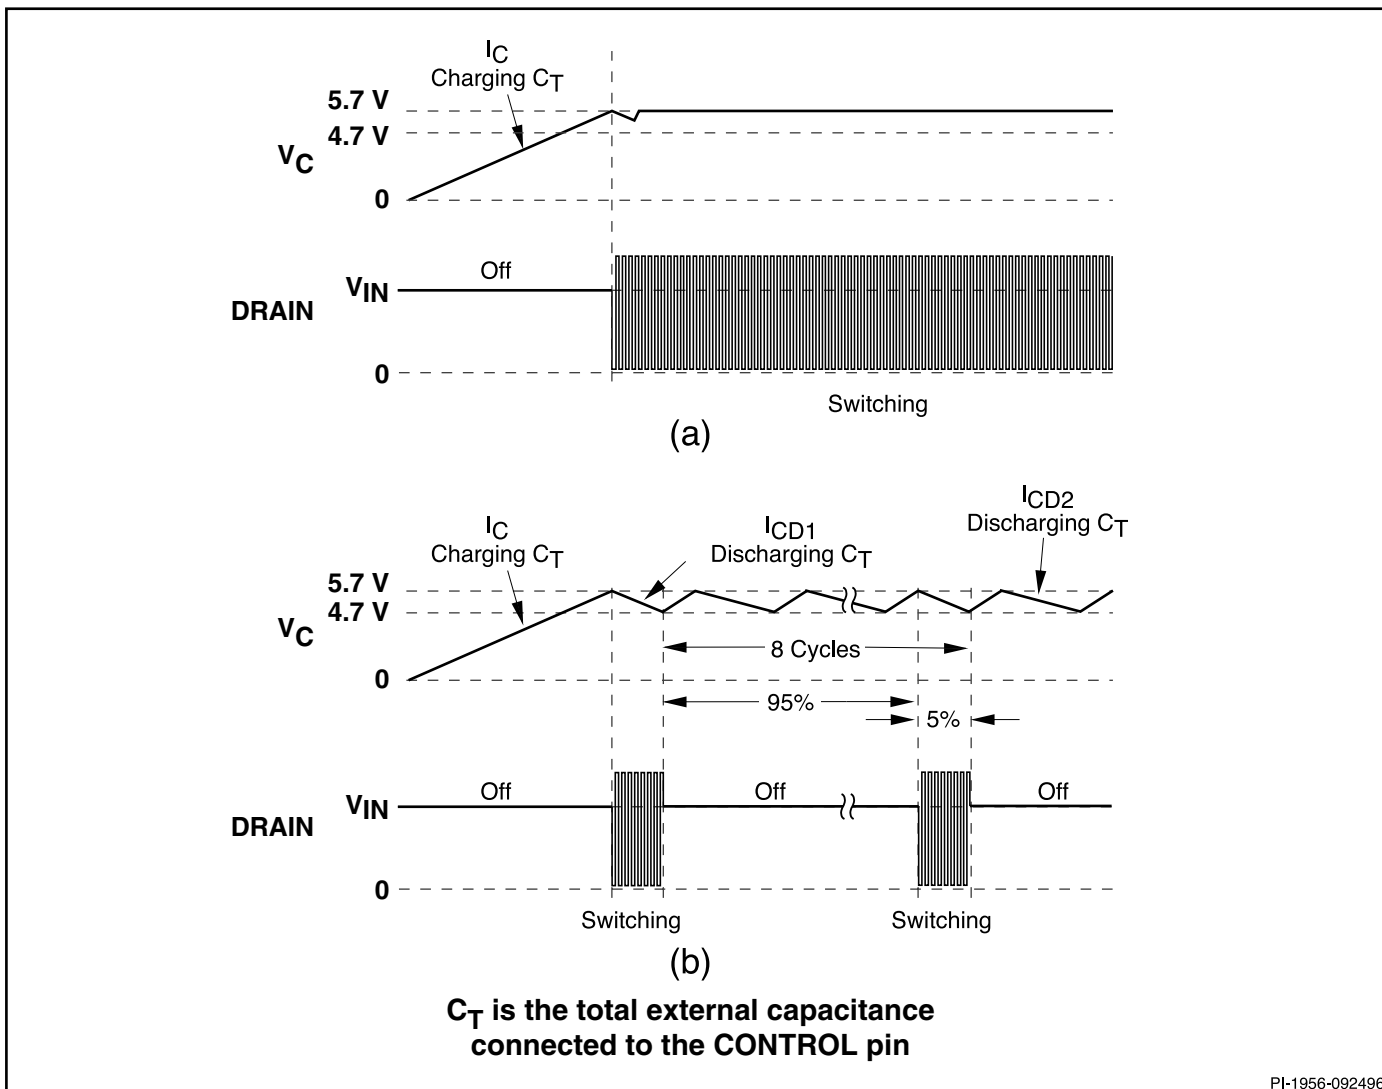

PI-1956-092496

Figure 5. Start-up Waveforms for (a) Normal Operation and (b) Auto-restart.

## TOP221-227

## TOPSwitch-II Family Functional Description (cont.)

**Control Voltage Supply**

CONTROL pin voltage  $V_C$  is the supply or bias voltage for the controller and driver circuitry. An external bypass capacitor closely connected between the CONTROL and SOURCE pins is required to supply the gate drive current. The total amount of capacitance connected to this pin ( $C_T$ ) also sets the auto-restart timing as well as control loop compensation.  $V_C$  is regulated in either of two modes of operation. Hysteretic regulation is used for initial start-up and overload operation. Shunt regulation is used to separate the duty cycle error signal from the control circuit supply current. During start-up, CONTROL pin current is supplied from a high-voltage switched current source connected internally between the DRAIN and CONTROL pins. The current source provides sufficient current to supply the control circuitry as well as charge the total external capacitance ( $C_T$ ).

The first time  $V_C$  reaches the upper threshold, the high-voltage current source is turned off and the PWM modulator and output transistor are activated, as shown in Figure 5(a). During normal operation (when the output voltage is regulated) feedback control current supplies the  $V_C$  supply current. The shunt regulator keeps  $V_C$  at typically 5.7 V by shunting CONTROL pin feedback current exceeding the required DC supply current through the PWM error signal sense resistor  $R_E$ . The low dynamic impedance of this pin ( $Z_C$ ) sets the gain of the error amplifier when used in a primary feedback configuration. The dynamic impedance of the CONTROL pin together with the external resistance and capacitance determines the control loop compensation of the power system.

If the CONTROL pin total external capacitance ( $C_T$ ) should discharge to the lower threshold, the output MOSFET is turned off and the control circuit is placed in a low-current standby mode. The high-voltage current source turns on and charges the external capacitance again. Charging current is shown with a negative polarity and discharging current is shown with a positive polarity in Figure 6. The hysteretic auto-restart comparator keeps  $V_C$  within a window of typically 4.7 to 5.7 V by turning the high-voltage current source on and off as shown in Figure 5(b). The auto-restart circuit has a divide-by-8 counter which prevents the output MOSFET from turning on again until eight discharge-charge cycles have elapsed. The counter effectively limits TOPSwitch power dissipation by reducing the auto-restart duty cycle to typically 5%. Auto-restart continues to cycle until output voltage regulation is again achieved.

**Bandgap Reference**

All critical TOPSwitch internal voltages are derived from a temperature-compensated bandgap reference. This reference is also used to generate a temperature-compensated current source which is trimmed to accurately set the oscillator frequency and MOSFET gate drive current.

**Oscillator**

The internal oscillator linearly charges and discharges the internal capacitance between two voltage levels to create a sawtooth waveform for the pulse width modulator. The oscillator sets the pulse width modulator/current limit latch at the beginning of each cycle. The nominal frequency of 100 kHz was chosen to minimize EMI and maximize efficiency in power supply applications. Trimming of the current reference improves the frequency accuracy.

**Pulse Width Modulator**

The pulse width modulator implements a voltage-mode control loop by driving the output MOSFET with a duty cycle inversely proportional to the current into the CONTROL pin which generates a voltage error signal across  $R_E$ . The error signal across  $R_E$  is filtered by an RC network with a typical corner frequency of 7 kHz to reduce the effect of switching noise. The filtered error signal is compared with the internal oscillator sawtooth waveform to generate the duty cycle waveform. As the control current increases, the duty cycle decreases. A clock signal from the oscillator sets a latch which turns on the output MOSFET. The pulse width modulator resets the latch, turning off the output MOSFET. The maximum duty cycle is set by the symmetry of the internal oscillator. The modulator has a minimum ON-time to keep the current consumption of the TOPSwitch independent of the error signal. Note that a minimum current must be driven into the CONTROL pin before the duty cycle begins to change.

**Gate Driver**


The gate driver is designed to turn the output MOSFET on at a controlled rate to minimize common-mode EMI. The gate drive current is trimmed for improved accuracy.

**Error Amplifier**

The shunt regulator can also perform the function of an error amplifier in primary feedback applications. The shunt regulator voltage is accurately derived from the temperature compensated bandgap reference. The gain of the error amplifier is set by the CONTROL pin dynamic impedance. The CONTROL pin clamps external circuit signals to the  $V_C$  voltage level. The CONTROL pin current in excess of the supply current is separated by the shunt regulator and flows through  $R_E$  as a voltage error signal.

**Cycle-By-Cycle Current Limit**

The cycle by cycle peak drain current limit circuit uses the output MOSFET ON-resistance as a sense resistor. A current limit comparator compares the output MOSFET ON-state drain-source voltage,  $V_{DS(ON)}$  with a threshold voltage. High drain current causes  $V_{DS(ON)}$  to exceed the threshold voltage and turns the output MOSFET off until the start of the next clock cycle. The current limit comparator threshold voltage is temperature compensated to minimize variation of the effective peak current limit due to temperature related changes in output MOSFET  $R_{DS(ON)}$ .

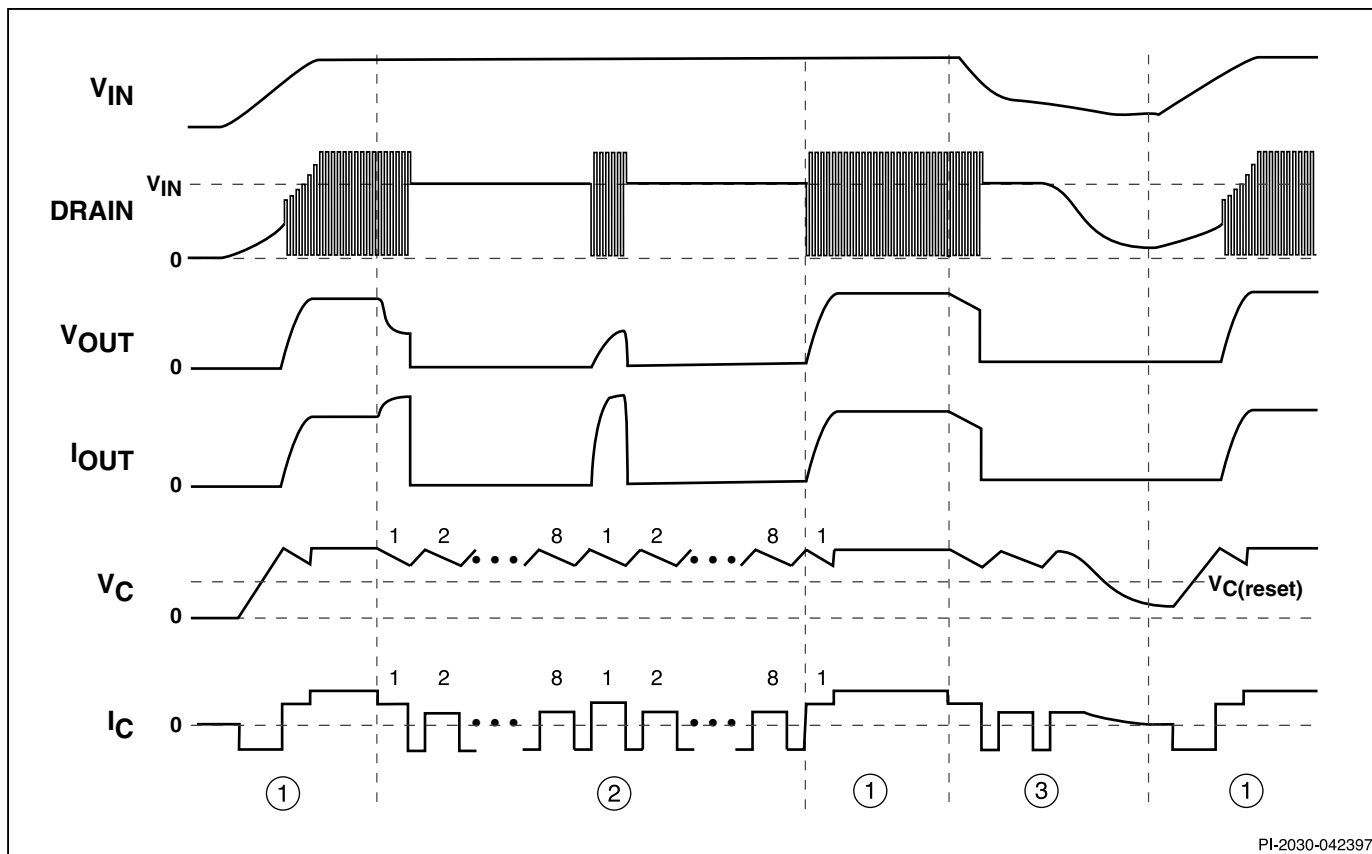

PI-2030-042397

Figure 6. Typical Waveforms for (1) Normal Operation, (2) Auto-restart, and (3) Power Down Reset.

The leading edge blanking circuit inhibits the current limit comparator for a short time after the output MOSFET is turned on. The leading edge blanking time has been set so that current spikes caused by primary-side capacitances and secondary-side rectifier reverse recovery time will not cause premature termination of the switching pulse.

The current limit can be lower for a short period after the leading edge blanking time as shown in Figure 12. This is due to dynamic characteristics of the MOSFET. To avoid triggering the current limit in normal operation, the drain current waveform should stay within the envelope shown.

### Shutdown/Auto-restart

To minimize TOPSwitch power dissipation, the shutdown/auto-restart circuit turns the power supply on and off at an auto-restart duty cycle of typically 5% if an out of regulation condition persists. Loss of regulation interrupts the external current into the CONTROL pin.  $V_C$  regulation changes from shunt mode to the hysteretic auto-restart mode described above. When the fault condition is removed, the power supply output becomes regulated,  $V_C$  regulation returns to shunt mode, and normal operation of the power supply resumes.


### Overtemperature Protection

Temperature protection is provided by a precision analog circuit that turns the output MOSFET off when the junction temperature exceeds the thermal shutdown temperature (typically 135 °C). Activating the power-up reset circuit by removing and restoring input power or momentarily pulling the CONTROL pin below the power-up reset threshold resets the latch and allows TOPSwitch to resume normal power supply operation.  $V_C$  is regulated in hysteretic mode and a 4.7 V to 5.7 V (typical) sawtooth waveform is present on the CONTROL pin when the power supply is latched off.

### High-Voltage Bias Current Source

This current source biases TOPSwitch from the DRAIN pin and charges the CONTROL pin external capacitance ( $C_T$ ) during start-up or hysteretic operation. Hysteretic operation occurs during auto-restart and overtemperature latched shutdown. The current source is switched on and off with an effective duty cycle of approximately 35%. This duty cycle is determined by the ratio of CONTROL pin charge ( $I_C$ ) and discharge currents ( $I_{CD1}$  and  $I_{CD2}$ ). This current source is turned off during normal operation when the output MOSFET is switching.

## TOP221-227

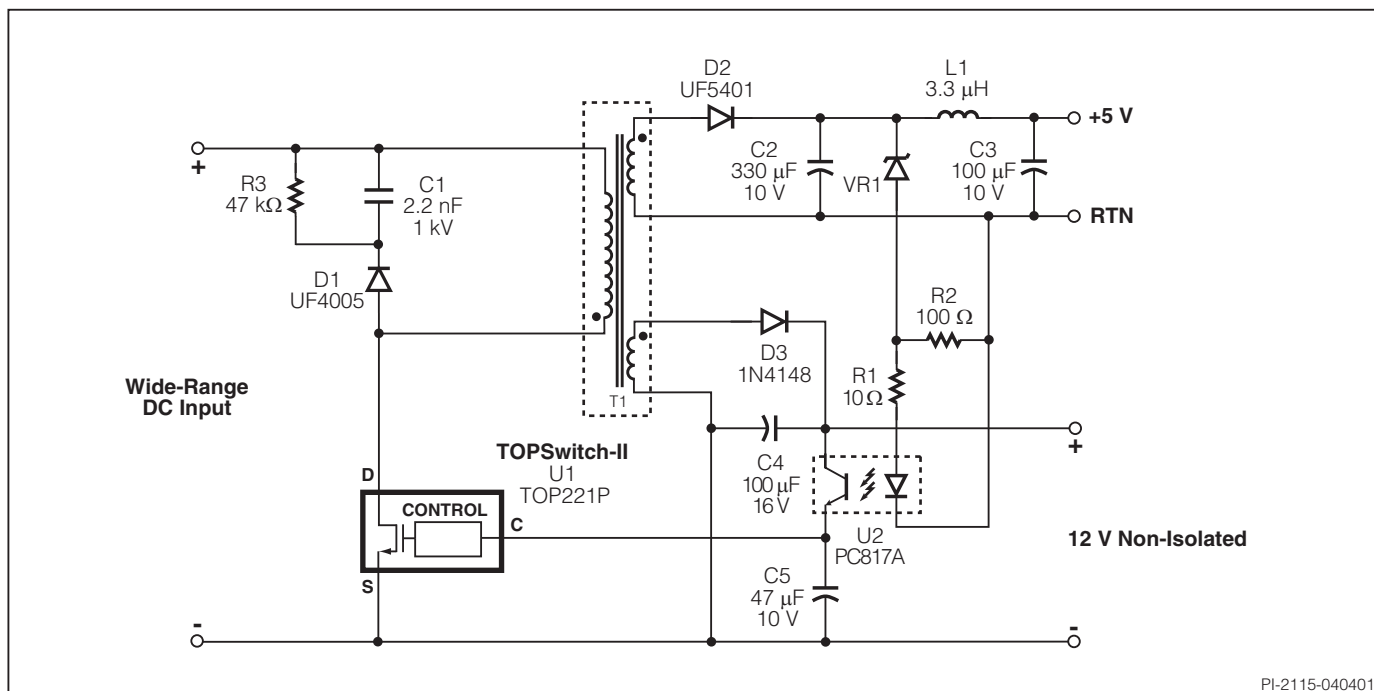

PI-2115-040401

Figure 7. Schematic Diagram of a 4 W TOPSwitch-II Standby Power Supply using an 8 lead PDIP.

## Application Examples

Following are just two of the many possible TOPSwitch implementations. Refer to the Data Book and Design Guide for additional examples.

### 4 W Standby Supply using 8 Lead PDIP

Figure 7 shows a 4 W standby supply. This supply is used in appliances where certain standby functions (e.g. real time clock, remote control port) must be kept active even while the main power supply is turned off.

The 5 V secondary is used to supply the standby function and the 12 V non-isolated output is used to supply power for the PWM controller of the main power supply and other primary side functions.

For this application the input rectifiers and input filter are sized for the main supply and are not shown. The input DC rail may vary from 100 V to 380 V DC which corresponds to

the full universal AC input range. The TOP221 is packaged in an 8 pin power DIP package.

The output voltage (5 V) is directly sensed by the Zener diode (VR1) and the optocoupler (U2). The output voltage is determined by the sum of the Zener voltage and the voltage drop across the LED of the optocoupler (the voltage drop across R1 is negligible). The output transistor of the optocoupler drives the CONTROL pin of the TOP221. C5 bypasses the CONTROL pin and provides control loop compensation and sets the auto-restart frequency.

The transformer's leakage inductance voltage spikes are snubbed by R3 and C1 through diode D1. The bias winding is rectified and filtered by D3 and C4 providing a non-isolated 12 V output which is also used to bias the collector of the optocoupler's output transistor. The isolated 5 V output winding is rectified by D2 and filtered by C2, L1 and C3.



## TOP221-227

### Key Application Considerations

#### General Guidelines

- Keep the SOURCE pin length very short. Use a Kelvin connection to the SOURCE pin for the CONTROL pin by-pass capacitor. Use single point grounding techniques at the SOURCE pin as shown in Figure 9.
- Minimize peak voltage and ringing on the DRAIN voltage at turn-off. Use a Zener or TVS Zener diode to clamp the drain voltage below the breakdown voltage rating of TOPSwitch under all conditions, including start-up and overload. The maximum recommended clamp Zener voltage for the TOP2XX series is 200 V and the corresponding maximum reflected output voltage on the primary is 135 V. Please see Step 4: AN-16 in the 1996-97 Data Book and Design Guide or on our Web site.
- The transformer should be designed such that the rate of change of drain current due to transformer saturation is within the absolute maximum specification ( $\Delta I_D$  in 100 ns before turn off as shown in Figure 13). As a guideline, for most common transformer cores, this can be achieved by maintaining the Peak Flux Density (at maximum  $I_{LIMIT}$  current) below 4200 Gauss (420 mT). The transformer spreadsheets Rev. 2.1 (or later) for continuous and Rev.1.0 (or later) for discontinuous conduction mode provide the necessary information.
- Do not plug TOPSwitch into a “hot” IC socket during test. External CONTROL pin capacitance may be charged to excessive voltage and cause TOPSwitch damage.
- While performing TOPSwitch device tests, do not exceed maximum CONTROL pin voltage of 9 V or maximum CONTROL pin current of 100 mA.
- Under some conditions, externally provided bias or supply current driven into the CONTROL pin can hold the TOPSwitch in one of the 8 auto-restart cycles indefinitely and prevent starting. To avoid this problem when doing bench evaluations, it is recommended that the  $V_C$  power supply be turned on before the DRAIN voltage is applied. TOPSwitch can also be reset by shorting the CONTROL pin to the SOURCE pin momentarily.
- CONTROL pin currents during auto-restart operation are much lower at low input voltages (< 36 V) which increases the auto-restart cycle time (see the  $I_C$  vs. DRAIN Voltage Characteristic curve).
- Short interruptions of AC power may cause TOPSwitch to enter the 8-count auto-restart cycle before starting again. This is because the input energy storage capacitors are not completely discharged and the CONTROL pin capacitance has not discharged below the internal power-up reset voltage.
- In some cases, minimum loading may be necessary to keep a lightly loaded or unloaded output voltage within the desired range due to the minimum ON-time.

#### Replacing TOPSwitch with TOPSwitch-II

There is no external latching shutdown function in TOPSwitch-II. Otherwise, the functionality of the TOPSwitch-II devices is same as that of the TOPSwitch family. However, **before considering TOPSwitch-II as a 'drop in' replacement in an existing TOPSwitch design, the design should be verified as described below.**

The new TOPSwitch-II family offers more power capability than the original TOPSwitch family for the same MOSFET  $R_{DS(ON)}$ . Therefore, the original TOPSwitch design must be reviewed to make sure that the selected TOPSwitch-II replacement device and other primary components are not over stressed under abnormal conditions.

The following verification steps are recommended:

- Check the transformer design to make sure that it meets the  $\Delta I_D$  specification as outlined in the General Guidelines section above.
- Thermal: Higher power capability of the TOPSwitch-II would in many instances allow use of a smaller MOSFET device (higher  $R_{DS(ON)}$ ) for reduced cost. This may affect TOPSwitch power dissipation and power supply efficiency. Therefore thermal performance of the power supply must be verified with the selected TOPSwitch-II device.
- Clamp Voltage: Reflected and Clamp voltages should be verified not to exceed recommended maximums for the TOP2XX Series: 135 V Reflected/200 V Clamp. Please see Step 4: AN-16 in the Data Book and Design Guide and readme.txt file attached to the transformer design spreadsheets.
- Agency Approval: Migrating to TOPSwitch-II may require agency re-approval.

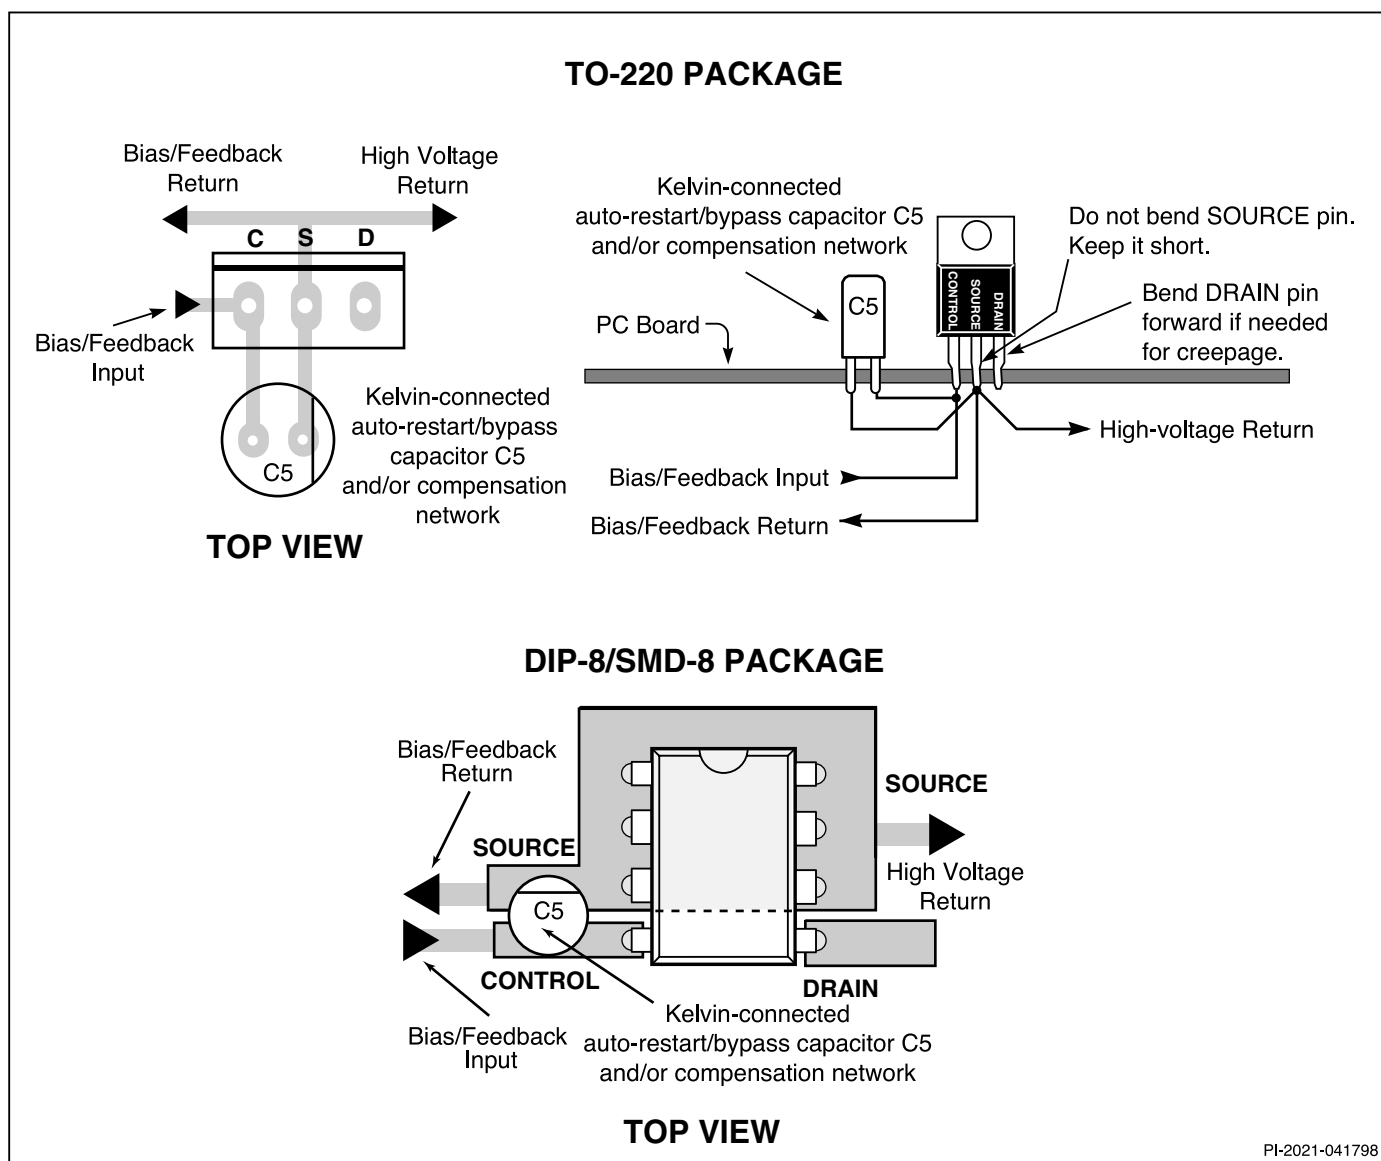


Figure 9. Recommended TOPSwitch Layout.

## Design Tools

The following tools available from Power Integrations greatly simplify TOPSwitch based power supply design.

- Data Book and Design Guide includes extensive application information
- Excel Spreadsheets for Transformer Design - **Use of this tool is strongly recommended for all TOPSwitch designs.**
- Reference design boards – Production viable designs that are assembled and tested.

All data sheets, application literature and up-to-date versions of the Transformer Design Spreadsheets can be downloaded from our Web site at [www.power.com](http://www.power.com). A diskette of the Transformer Design Spreadsheets may also be obtained by sending in the completed form provided at the end of this data sheet.

## TOP221-227

ABSOLUTE MAXIMUM RATINGS<sup>(1,5)</sup>

|   |  |
|---|--|
| DRAIN Voltage .....   | -0.3 to 700 V                              |
| DRAIN Current Increase ( $\Delta I_D$ ) in 100 ns except during blanking time ..... | $0.1 \times I_{LIMIT(MAX)}$ <sup>(2)</sup> |
| CONTROL Voltage .....   | -0.3 V to 9 V                              |
| CONTROL Current .....   | 100 mA                                     |
| Storage Temperature .....   | -65 to 150 °C                              |
| Operating Junction Temperature <sup>(3)</sup> .....                                 | -40 to 150 °C                              |
| Lead Temperature <sup>(4)</sup> .....   | 260 °C                                     |

## Notes:

1. All voltages referenced to SOURCE,  $T_A = 25\text{ °C}$ .
2. Related to transformer saturation – see Figure 13.
3. Normally limited by internal circuitry.
4. 1/16" from case for 5 seconds.
5. The Absolute Maximum Ratings specified may be applied, one at a time without causing permanent damage to the product. Exposure to Absolute Maximum Ratings for extended periods of time may affect product reliability.

## THERMAL RESISTANCE

Thermal Resistance: Y Package

 $(\theta_{JA})^{(1)}$  ..... 70 °C/W $(\theta_{JC})^{(2)}$  ..... 2 °C/W

P/G Package:

 $(\theta_{JA})$  ..... 45 °C/W<sup>(3)</sup>; 35 °C/W<sup>(4)</sup> $(\theta_{JC})^{(2)}$  ..... 11 °C/W

## Notes:

1. Free standing with no heat sink.
2. Measured at tab closest to plastic interface or SOURCE pin.
3. Soldered to 0.36 sq. inch (232 mm<sup>2</sup>), 2 oz. (610 gm/m<sup>2</sup>) copper clad.
4. Soldered to 1 sq. inch (645 mm<sup>2</sup>), 2 oz. (610 gm/m<sup>2</sup>) copper clad.

| Parameter                           | Symbol      | Conditions<br>(Unless Otherwise Specified)<br>See Figure 14<br>SOURCE = 0 V; $T_J = -40$ to 125 °C | Min                | Typ   | Max  | Units    |    |
|-------------------------------------|-------------|--|--------------------|-------|------|----------|----|
|                                     |             |  |                    |       |      |          |    |
| <b>CONTROL FUNCTIONS</b>            |             |  |                    |       |      |          |    |
| Output Frequency                    | $f_{OSC}$   | $I_C = 4\text{ mA}$ , $T_J = 25\text{ °C}$   | 90                 | 100   | 110  | kHz      |    |
| Maximum Duty Cycle                  | $D_{MAX}$   | $I_C = I_{CD1} + 0.4\text{ mA}$ , See Figure 10  | 64                 | 67    | 70   | %        |    |
| Minimum Duty Cycle                  | $D_{MIN}$   | $I_C = 10\text{ mA}$ , See Figure 10   | 0.7                | 1.7   | 2.7  | %        |    |
| PWM Gain                            |             | $I_C = 4\text{ mA}$ , $T_J = 25\text{ °C}$<br>See Figure 4   | -21                | -16   | -11  | %/mA     |    |
| PWM Gain Temperature Drift          |             | See Note A   |                    | -0.05 |      | %/mA/°C  |    |
| External Bias Current               | $I_B$       | See Figure 4   | 0.8                | 2.0   | 3.3  | mA       |    |
| Dynamic Impedance                   | $Z_C$       | $I_C = 4\text{ mA}$ , $T_J = 25\text{ °C}$<br>See Figure 11  | 10                 | 15    | 22   | $\Omega$ |    |
| Dynamic Impedance Temperature Drift |             |  |                    | 0.18  |      | %/°C     |    |
| <b>SHUTDOWN/AUTO-RESTART</b>        |             |  |                    |       |      |          |    |
| CONTROL Pin Charging Current        | $I_C$       | $T_J = 25\text{ °C}$   | $V_C = 0\text{ V}$ | -2.4  | -1.9 | -1.2     | mA |
|                                     |             |  | $V_C = 5\text{ V}$ | -2    | -1.5 | -0.8     |    |
| Charging Current Temperature Drift  | $V_{C(AR)}$ | See Note A<br>S1 open  |                    | 0.4   |      | %/°C     |    |

| Parameter                                    | Symbol             | Conditions<br>(Unless Otherwise Specified)<br>See Figure 14<br>SOURCE = 0 V; T <sub>J</sub> = -40 to 125 °C |                                    | Min    | Typ  | Max  | Units |
|--|--------------------|---|------------------------------------|--------|------|------|-------|
| <b>SHUTDOWN/AUTO-RESTART (cont.)</b>         |                    |   |                                    |        |      |      |       |
| Auto-restart Threshold Voltage               |                    | S1 open   |                                    |        | 5.7  |      | V     |
| UV Lockout Threshold Voltage                 |                    | S1 open   |                                    | 4.4    | 4.7  | 5.0  | V     |
| Auto-restart Hysteresis Voltage              |                    | S1 open   |                                    | 0.6    | 1.0  |      | V     |
| Auto-restart Duty Cycle                      |                    | S1 open   | TOP221-222                         | 2      | 5    | 9    | %     |
|  |                    |   | TOP223-227                         | 2      | 5    | 8    |       |
| Auto-restart Frequency                       |                    | S1 open   |                                    |        | 1.2  |      | Hz    |
| <b>CIRCUIT PROTECTION</b>                    |                    |   |                                    |        |      |      |       |
| Self-protection Current Limit                | I <sub>LIMIT</sub> | di/dt = 40 mA/μs,<br>T <sub>J</sub> = 25 °C   | TOP221YN                           | 0.23   | 0.25 | 0.28 | A     |
|  |                    |   | TOP221PN or GN                     |        |      |      |       |
|  |                    | di/dt = 80 mA/μs,<br>T <sub>J</sub> = 25 °C   | TOP222YN                           | 0.45   | 0.50 | 0.55 |       |
|  |                    |   | TOP222PN or GN                     |        |      |      |       |
|  |                    | di/dt = 160 mA/μs,<br>T <sub>J</sub> = 25 °C  | TOP223YN                           | 0.90   | 1.00 | 1.10 |       |
|  |                    |   | TOP223PN or GN                     |        |      |      |       |
|  |                    | di/dt = 240 mA/μs,<br>T <sub>J</sub> = 25 °C  | TOP224YN                           | 1.35   | 1.50 | 1.65 |       |
| TOP224PN or GN                               |                    |   |                                    |        |      |      |       |
| di/dt = 320 mA/μs,<br>T <sub>J</sub> = 25 °C | TOP225YN           | 1.80  | 2.00                               | 2.20   |      |      |       |
| di/dt = 400 mA/μs,<br>T <sub>J</sub> = 25 °C | TOP226YN           | 2.25  | 2.50                               | 2.75   |      |      |       |
| di/dt = 480 mA/μs,<br>T <sub>J</sub> = 25 °C | TOP227YN           | 2.70  | 3.00                               | 3.30   |      |      |       |
| Initial Current Limit                        | I <sub>INIT</sub>  | See Figure 12<br>T <sub>J</sub> = 25 °C   | ≤ 85 VAC<br>(Rectified Line Input) | 0.75 × |      |      | A     |
|  |                    |   | 265 VAC<br>(Rectified Line Input)  | 0.6 ×  |      |      |       |
| Leading Edge Blanking Time                   | t <sub>LEB</sub>   | I <sub>C</sub> = 4 mA,<br>T <sub>J</sub> = 25 °C  |                                    |        | 180  |      | ns    |

## TOP221-227

| Parameter                         | Symbol         | Conditions<br>(Unless Otherwise Specified)<br>See Figure 14<br>SOURCE = 0 V; $T_J = -40$ to $125$ °C | Min            | Typ | Max  | Units   |          |
|-----------------------------------|----------------|--|----------------|-----|------|---------|----------|
| <b>CIRCUIT PROTECTION (cont.)</b> |                |  |                |     |      |         |          |
| Current Limit Delay               | $t_{ILD}$      | $I_C = 4$ mA   |                | 100 |      | ns      |          |
| Thermal Shutdown Temperature      |                | $I_C = 4$ mA   | 125            | 135 |      | °C      |          |
| Power-up Reset Threshold Voltage  | $V_{C(RESET)}$ | S2 open  | 2.0            | 3.3 | 4.3  | V       |          |
| <b>OUTPUT</b>                     |                |  |                |     |      |         |          |
| ON-State Resistance               | $R_{DS(ON)}$   | TOP221<br>$I_D = 25$ mA  | $T_J = 25$ °C  |     | 31.2 | 36.0    | $\Omega$ |
|                                   |                |  | $T_J = 100$ °C |     | 51.4 | 60.0    |          |
|                                   |                | TOP222<br>$I_D = 50$ mA  | $T_J = 25$ °C  |     | 15.6 | 18.0    |          |
|                                   |                |  | $T_J = 100$ °C |     | 25.7 | 30.0    |          |
|                                   |                | TOP223<br>$I_D = 100$ mA   | $T_J = 25$ °C  |     | 7.8  | 9.0     |          |
|                                   |                |  | $T_J = 100$ °C |     | 12.9 | 15.0    |          |
|                                   |                | TOP224<br>$I_D = 150$ mA   | $T_J = 25$ °C  |     | 5.2  | 6.0     |          |
|                                   |                |  | $T_J = 100$ °C |     | 8.6  | 10.0    |          |
|                                   |                | TOP225<br>$I_D = 200$ mA   | $T_J = 25$ °C  |     | 3.9  | 4.5     |          |
|                                   |                |  | $T_J = 100$ °C |     | 6.4  | 7.5     |          |
|                                   |                | TOP226<br>$I_D = 250$ mA   | $T_J = 25$ °C  |     | 3.1  | 3.6     |          |
|                                   |                |  | $T_J = 100$ °C |     | 5.2  | 6.0     |          |
|                                   |                | TOP227<br>$I_D = 300$ mA   | $T_J = 25$ °C  |     | 2.6  | 3.0     |          |
|                                   |                |  | $T_J = 100$ °C |     | 4.3  | 5.0     |          |
| OFF-State Current                 | $I_{DSS}$      | See Note B<br>$V_{DS} = 560$ V, $T_A = 125$ °C   |                |     | 250  | $\mu$ A |          |
| Breakdown Voltage                 | $BV_{DSS}$     | See Note B<br>$I_D = 100$ $\mu$ A, $T_A = 25$ °C   | 700            |     |      | V       |          |
| Rise Time                         | $t_R$          | Measured in a Typical Flyback Converter Application.   |                | 100 |      | ns      |          |
| Fall Time                         | $t_F$          |  |                | 50  |      | ns      |          |

| Parameter                            | Symbol                | Conditions  |            | Min | Typ | Max | Units  |
|--------------------------------------|-----------------------|---|------------|-----|-----|-----|--------|
|                                      |                       | (Unless Otherwise Specified)<br>See Figure 14<br>SOURCE = 0 V; T <sub>J</sub> = -40 to 125 °C |            |     |     |     |        |
| <b>OUTPUT (cont.)</b>                |                       |   |            |     |     |     |        |
| DRAIN Supply Voltage                 |                       | See Note C  |            | 36  |     |     | V      |
| Shunt Regulator Voltage              | V <sub>C(SHUNT)</sub> | I <sub>C</sub> = 4 mA   |            | 5.5 | 5.7 | 6.0 | V      |
| Shunt Regulator Temperature Drift    |                       |   |            |     | ±50 |     | ppm/°C |
| CONTROL Supply/<br>Discharge Current | I <sub>CD1</sub>      | Output<br>MOSFET Enabled  | TOP221-224 | 0.6 | 1.2 | 1.6 | mA     |
|                                      |                       |   | TOP225-227 | 0.7 | 1.4 | 1.8 |        |
|                                      | I <sub>CD2</sub>      | Output MOSFET Disabled  | 0.5        | 0.8 | 1.1 |     |        |

## NOTES:

- A. For specifications with negative values, a negative temperature coefficient corresponds to an increase in magnitude with increasing temperature, and a positive temperature coefficient corresponds to a decrease in magnitude with increasing temperature.
- B. The breakdown voltage and leakage current measurements can be accomplished as shown in Figure 15 by using the following sequence:
- i. The curve tracer should initially be set at 0 V. The base output should be adjusted through a voltage sequence of 0 V, 6.5 V, 4.3 V, and 6.5 V, as shown. The base current from the curve tracer should not exceed 100 mA. This CONTROL pin sequence interrupts the Auto-restart sequence and locks the TOPSwitch internal MOSFET in the OFF-state.
  - ii. The breakdown and the leakage measurements can now be taken with the curve tracer. The maximum voltage from the curve tracer must be limited to 700 V under all conditions.
- C. It is possible to start up and operate TOPSwitch at DRAIN voltages well below 36 V. However, the CONTROL pin charging current is reduced, which affects start-up time, auto-restart frequency, and auto-restart duty cycle. Refer to the characteristic graph on CONTROL pin charge current (I<sub>C</sub>) vs. DRAIN voltage for low voltage operation characteristics.

**TOP221-227**

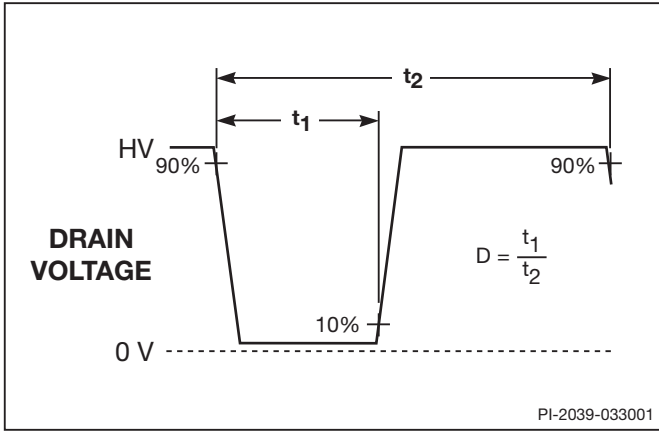


Figure 10. TOPSwitch Duty Cycle Measurement.

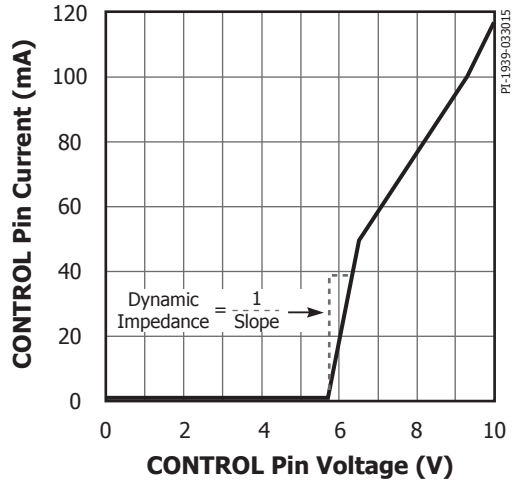


Figure 11. TOPSwitch CONTROL Pin I-V Characteristic.

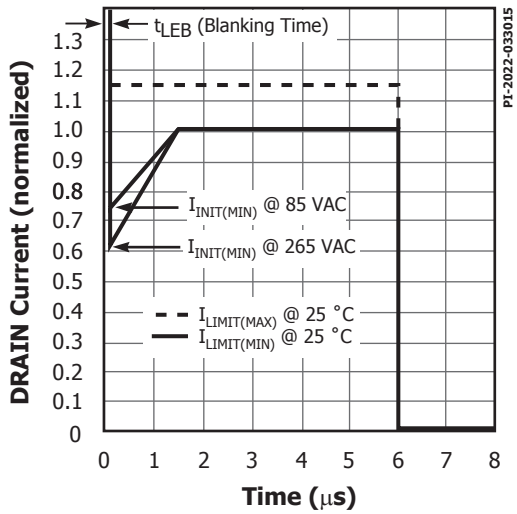


Figure 12. Self-protection Current Limit Envelope.


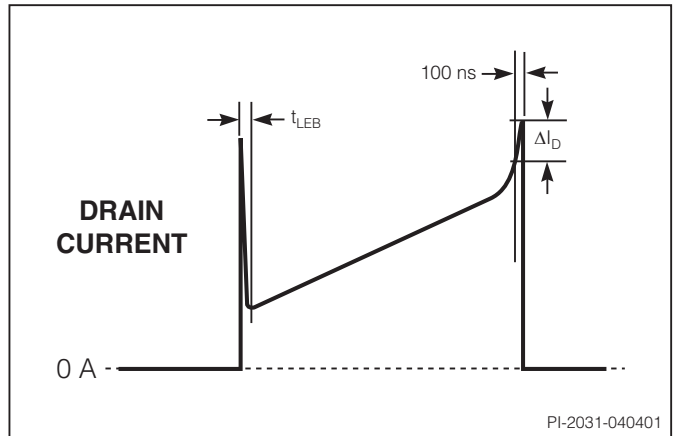



Figure 13. Example of  $\Delta I_D$  on Drain Current Waveform with Saturated Transformer.

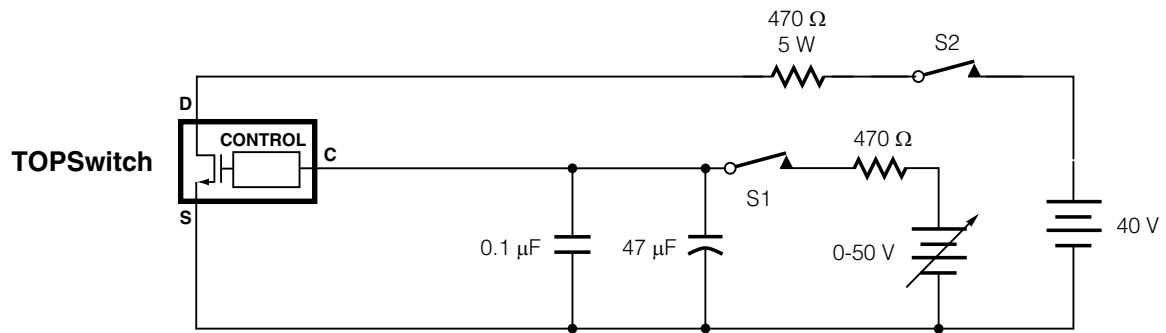

**NOTES:** 1. This test circuit is not applicable for current limit or output characteristic measurements.  
2. For P package, short all SOURCE and SOURCE (HV RTN) pins together.

PI-1964-110696

Figure 14. TOPSwitch General Test Circuit.

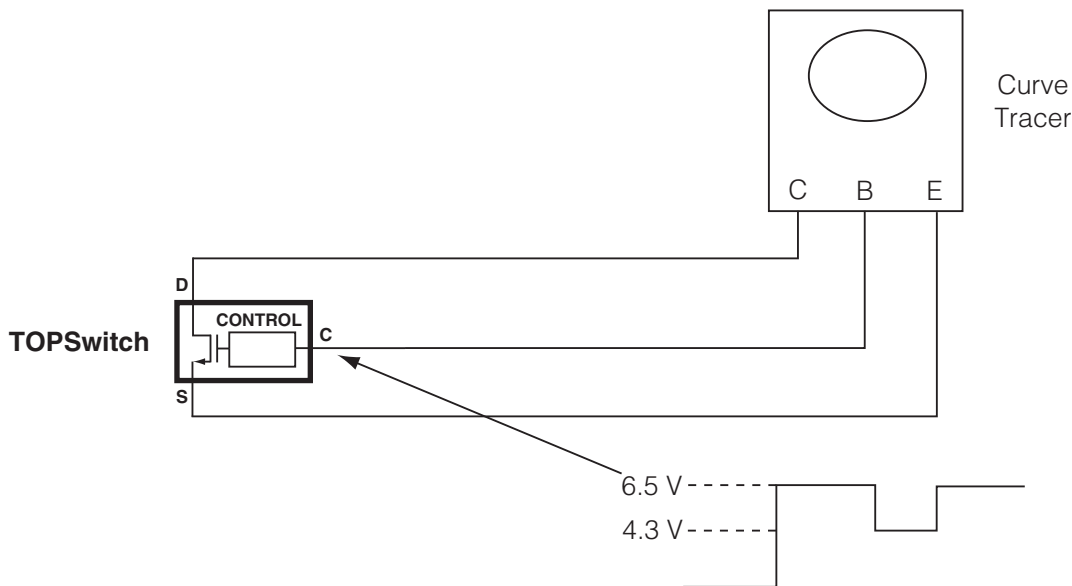

**NOTE:** This CONTROL pin sequence interrupts the Auto-restart sequence and locks the TOPSwitch internal MOSFET in the OFF-State.

PI-2109-040401

Figure 15. Breakdown Voltage and Leakage Current Measurement Test Circuit.

## TOP221-227

## BENCH TEST PRECAUTIONS FOR EVALUATION OF ELECTRICAL CHARACTERISTICS


The following precautions should be followed when testing TOPSwitch by itself outside of a power supply. The schematic shown in Figure 14 is suggested for laboratory testing of TOPSwitch.

When the DRAIN supply is turned on, the part will be in the Auto-restart mode. The CONTROL pin voltage will be oscillating at a low frequency from 4.7 to 5.7 V and the DRAIN is turned on every eighth cycle of the CONTROL pin oscillation. If the CONTROL pin power supply is turned on while


in this Auto-restart mode, there is only a 12.5% chance that the control pin oscillation will be in the correct state (DRAIN active state) so that the continuous DRAIN voltage waveform may be observed. It is recommended that the  $V_C$  power supply be turned on first and the DRAIN power supply second if continuous drain voltage waveforms are to be observed. The 12.5% chance of being in the correct state is due to the 8:1 counter. Temporarily shorting the CONTROL pin to the SOURCE pin will reset TOPSwitch, which then will come up in the correct state.

## Typical Performance Characteristics



## BREAKDOWN vs. TEMPERATURE

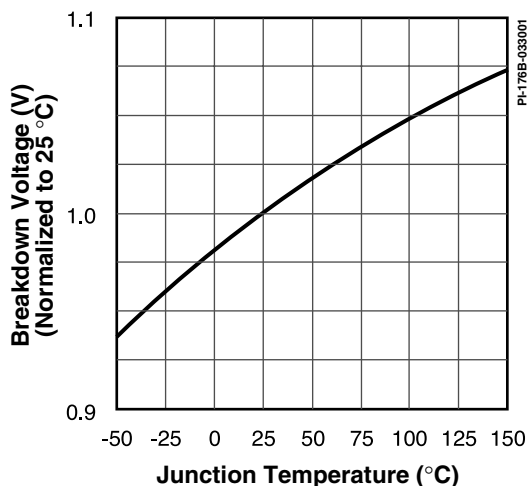

## FREQUENCY vs. TEMPERATURE

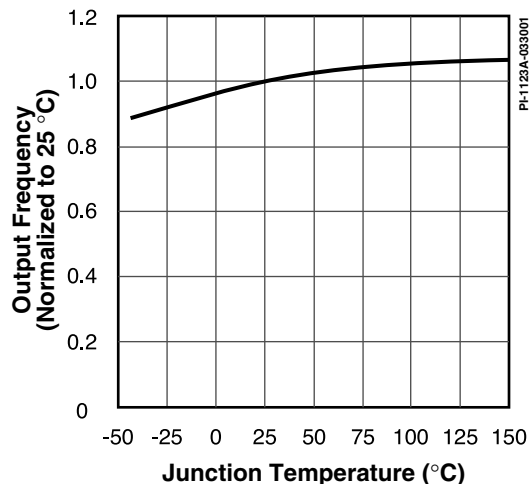


## CURRENT LIMIT vs. TEMPERATURE

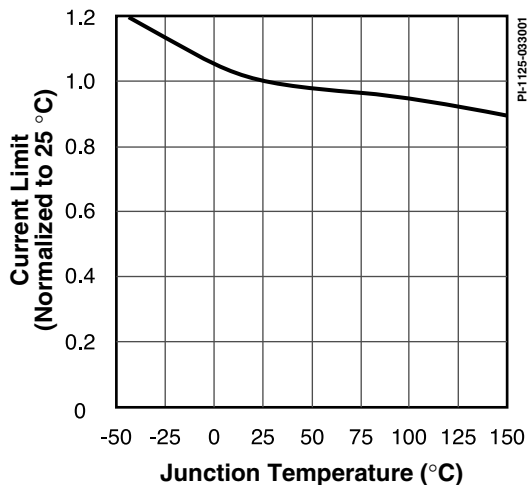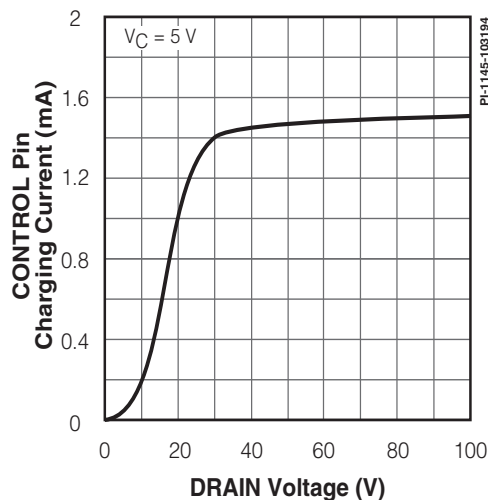
 $I_C$  vs. DRAIN VOLTAGE

Typical Performance Characteristics (cont.)


**OUTPUT CHARACTERISTICS**

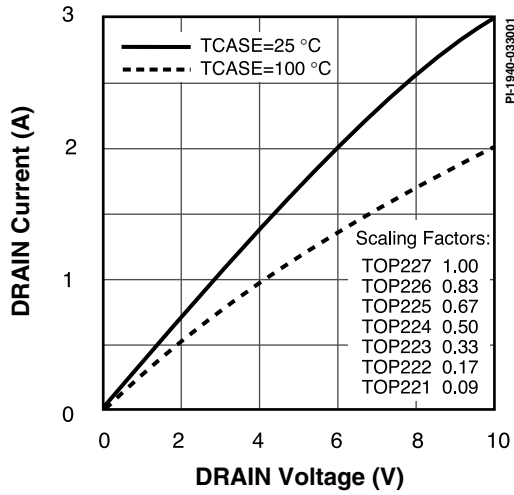

**COSS vs. DRAIN VOLTAGE**

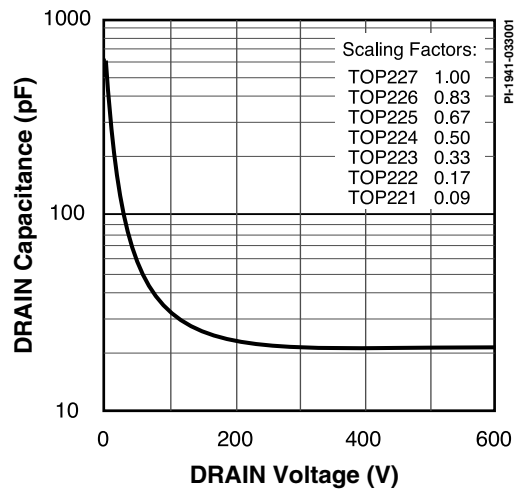


**DRAIN CAPACITANCE POWER**

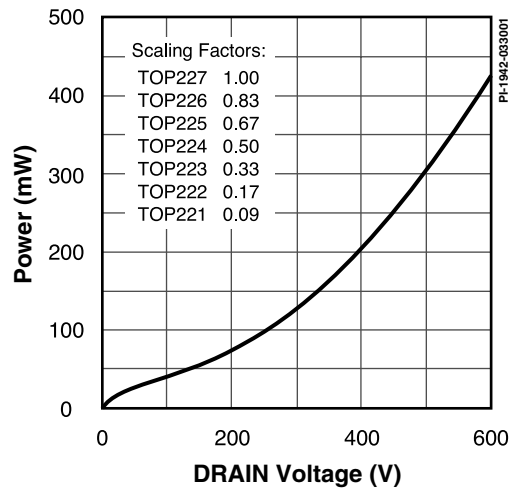

**TOP221-227**

**Plastic TO-220/3**

| DIM | inches      | mm          |
|-----|-------------|-------------|
| A   | .460-.480   | 11.68-12.19 |
| B   | .400-.415   | 10.16-10.54 |
| C   | .236-.260   | 5.99-6.60   |
| D   | .240 - REF. | 6.10 - REF. |
| E   | .520-.560   | 13.21-14.22 |
| F   | .028-.038   | .71-.97     |
| G   | .045-.055   | 1.14-1.40   |
| H   | .090-.110   | 2.29-2.79   |
| J   | .165-.185   | 4.19-4.70   |
| K   | .045-.055   | 1.14-1.40   |
| L   | .095-.115   | 2.41-2.92   |
| M   | .015-.020   | .38-.51     |
| N   | .705-.715   | 17.91-18.16 |
| O   | .146-.156   | 3.71-3.96   |
| P   | .103-.113   | 2.62-2.87   |

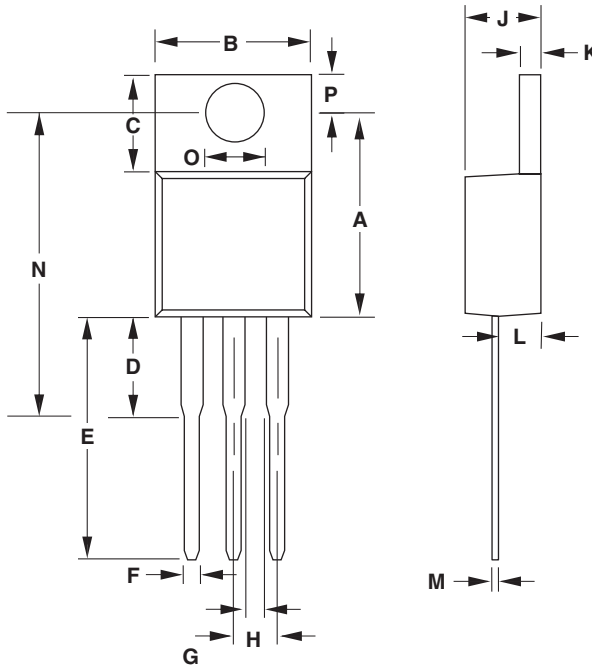


- Notes:
1. Package dimensions conform to JEDEC specification TO-220 AB for standard flange mounted, peripheral lead package; .100 inch lead spacing (Plastic) 3 leads (issue J, March 1987).
  2. Controlling dimensions are inches.
  3. Pin numbers start with Pin 1, and continue from left to right when viewed from the top.
  4. Dimensions shown do not include mold flash or other protrusions. Mold flash or protrusions shall not exceed .006 (.15 mm) on any side.
  5. Position of terminals to be measured at a position .25 (6.35 mm) from the body.
  6. All terminals are solder plated.
  7. Bent lead should be 12 mil max.

Y03A

PI-1848-050602

**PDIP-8 (P Package)**

| DIM | Inches      | mm         |
|-----|-------------|------------|
| A   | 0.356-0.387 | 9.05-9.83  |
| B   | 0.240-0.260 | 6.10-6.60  |
| C   | 0.125-0.145 | 3.18-3.68  |
| G   | 0.015-0.040 | 0.38-1.02  |
| H   | 0.118-0.140 | 3.00-3.56  |
| J1  | 0.057-0.068 | 1.45-1.73  |
| J2  | 0.014-0.022 | 0.36-0.56  |
| K   | 0.008-0.015 | 0.20-0.38  |
| L   | 0.100 BSC   | 2.54 BSC   |
| M   | 0.030 (MIN) | 0.76 (MIN) |
| N   | 0.300-0.320 | 7.62-8.13  |
| P   | 0.300-0.390 | 7.62-9.91  |
| Q   | 0.300 BSC   | 7.62 BSC   |

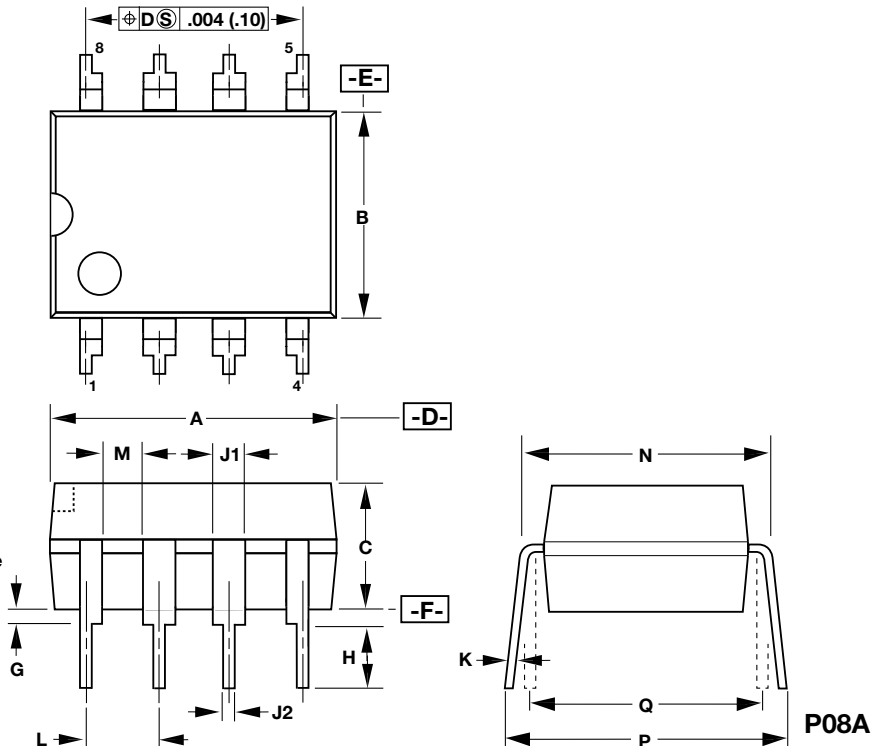


- Notes:
1. Package dimensions conform to JEDEC specification MS-001-AB for standard dual in-line (DIP) package .300 inch row spacing (PLASTIC) 8 leads (issue B, 7/85).
  2. Controlling dimensions are inches.
  3. Dimensions shown do not include mold flash or other protrusions. Mold flash or protrusions shall not exceed .006 (.15) on any side.
  4. D, E and F are reference datums on the molded body.

P08A

PI-2076-081716

**SMD-8 (G Package)**

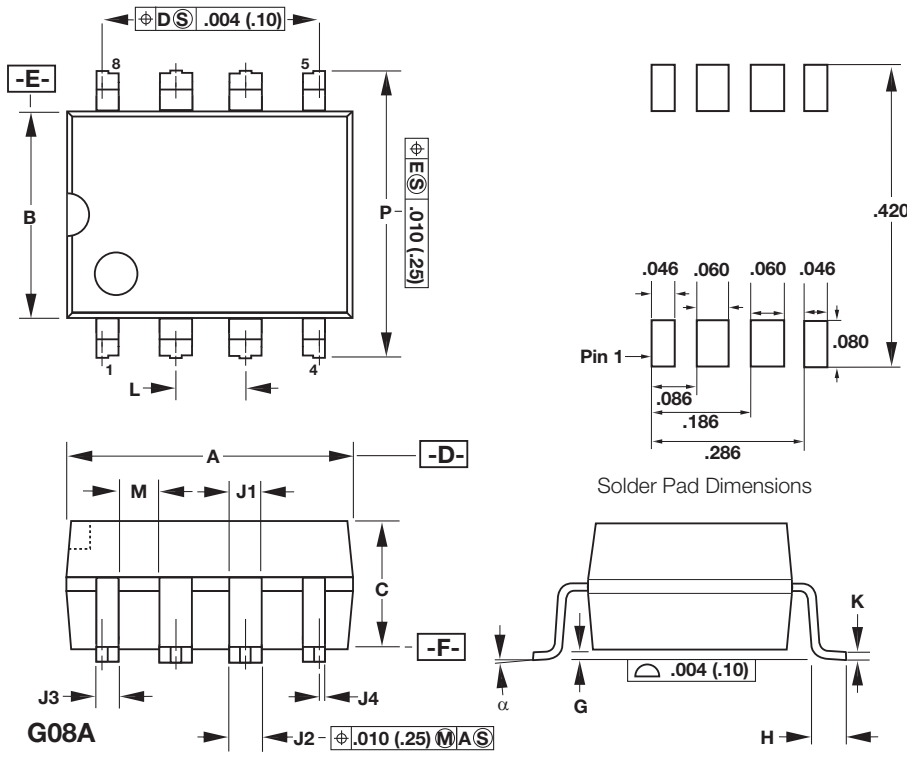


| DIM | Inches      | mm         |
|-----|-------------|------------|
| A   | 0.356-0.387 | 9.05-9.83  |
| B   | 0.240-0.260 | 6.10-6.60  |
| C   | 0.125-0.145 | 3.18-3.68  |
| G   | 0.004-0.012 | 0.10-0.30  |
| H   | 0.036-0.044 | 0.91-1.12  |
| J1  | 0.057-0.068 | 1.45-1.73  |
| J2  | 0.048-0.053 | 1.22-1.35  |
| J3  | 0.032-0.037 | 0.81-0.94  |
| J4  | 0.007-0.011 | 0.18-0.28  |
| K   | 0.010-0.012 | 0.25-0.30  |
| L   | 0.100 BSC   | 2.54 BSC   |
| M   | 0.030 (MIN) | 0.76 (MIN) |
| P   | 0.372-0.388 | 9.45-9.86  |
| α   | 0-8°        | 0-8°       |

- Notes:**
1. Package dimensions conform to JEDEC specification MS-001-AB (issue B, 7/85) except for lead shape and size.
  2. Controlling dimensions are inches.
  3. Dimensions shown do not include mold flash or other protrusions. Mold flash or protrusions shall not exceed .006 (.15) on any side.
  4. D, E and F are reference datums on the molded body.

PI-2077-081716

**Part Ordering Information**

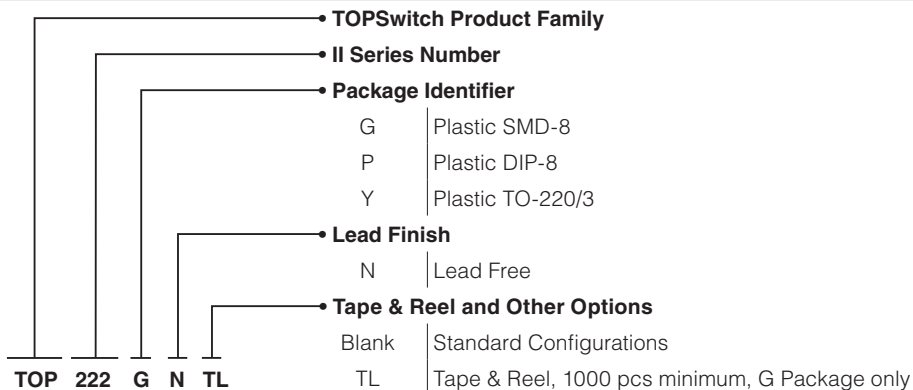

**TOP221-227**

| Revision | Notes  | Date  |
|----------|--|-------|
| C        | -  | 12/97 |
| D        | Updated package references, corrected spelling, storage temperature and OJC and updated nomenclature in parameter table. Added G package references to Self-Protection Current Limit parameter. Corrected font sizes in figures. | 07/01 |
| E        | Updated with new Brand Style.  | 07/15 |
| F        | Updated part numbers with the "N" suffix. Added Y, P and G package drawings.   | 10/15 |
| G        | Updated PDIP-8 (P Package) and SMD-8 (G Package) per PCN-16232.  | 08/16 |

**For the latest updates, visit our website: [www.power.com](http://www.power.com)**

Power Integrations reserves the right to make changes to its products at any time to improve reliability or manufacturability. Power Integrations does not assume any liability arising from the use of any device or circuit described herein. POWER INTEGRATIONS MAKES NO WARRANTY HEREIN AND SPECIFICALLY DISCLAIMS ALL WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS.

**Patent Information**

The products and applications illustrated herein (including transformer construction and circuits external to the products) may be covered by one or more U.S. and foreign patents, or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations patents may be found at [www.power.com](http://www.power.com). Power Integrations grants its customers a license under certain patent rights as set forth at <http://www.power.com/ip.htm>.

**Life Support Policy**

POWER INTEGRATIONS PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF POWER INTEGRATIONS. As used herein:

1. A Life support device or system is one which, (i) is intended for surgical implant into the body, or (ii) supports or sustains life, and (iii) whose failure to perform, when properly used in accordance with instructions for use, can be reasonably expected to result in significant injury or death to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

The PI logo, TOPSwitch, TinySwitch, SENZero, SCALE-iDriver, Qspeed, PeakSwitch, LYTSwitch, LinkZero, LinkSwitch, InnoSwitch, HiperTFS, HiperPFS, HiperLCS, DPA-Switch, CAPZero, Clamless, EcoSmart, E-Shield, Filterfuse, FluxLink, StakFET, PI Expert and PI FACTS are trademarks of Power Integrations, Inc. Other trademarks are property of their respective companies. ©2016, Power Integrations, Inc.

**Power Integrations Worldwide Sales Support Locations****World Headquarters**

5245 Hellyer Avenue  
San Jose, CA 95138, USA.  
Main: +1-408-414-9200  
Customer Service:  
Phone: +1-408-414-9665  
Fax: +1-408-414-9765  
e-mail: [usasales@power.com](mailto:usasales@power.com)

**China (Shanghai)**

Rm 1601/1610, Tower 1,  
Kerry Everbright City  
No. 218 Tianmu Road West,  
Shanghai, P.R.C. 200070  
Phone: +86-21-6354-6323  
Fax: +86-21-6354-6325  
e-mail: [chinasales@power.com](mailto:chinasales@power.com)

**China (Shenzhen)**

17/F, Hivac Building, No. 2,  
Keji Nan 8th Road, Nanshan  
District, Shenzhen, China, 518057  
Phone: +86-755-8672-8689  
Fax: +86-755-8672-8690  
e-mail: [chinasales@power.com](mailto:chinasales@power.com)

**Germany**

Lindwurmstrasse 114  
80337 Munich  
Germany  
Phone: +49-895-527-39110  
Fax: +49-895-527-39200  
e-mail: [eurosales@power.com](mailto:eurosales@power.com)

**India**

#1, 14th Main Road  
Vasanthanagar  
Bangalore-560052 India  
Phone: +91-80-4113-8020  
Fax: +91-80-4113-8023  
e-mail: [indiasales@power.com](mailto:indiasales@power.com)

**Italy**

Via Milanese 20, 3rd. Fl.  
20099 Sesto San Giovanni  
(MI) Italy  
Phone: +39-024-550-8701  
Fax: +39-028-928-6009  
e-mail: [eurosales@power.com](mailto:eurosales@power.com)

**Japan**

Kosei Dai-3 Bldg.  
2-12-11, Shin-Yokohama,  
Kohoku-ku  
Yokohama-shi Kanagawa  
222-0033 Japan  
Phone: +81-45-471-1021  
Fax: +81-45-471-3717  
e-mail: [japansales@power.com](mailto:japansales@power.com)

**Korea**

RM 602, 6FL  
Korea City Air Terminal B/D, 159-6  
Samsung-Dong, Kangnam-Gu,  
Seoul, 135-728, Korea  
Phone: +82-2-2016-6610  
Fax: +82-2-2016-6630  
e-mail: [koreasales@power.com](mailto:koreasales@power.com)

**Singapore**

51 Newton Road  
#19-01/05 Goldhill Plaza  
Singapore, 308900  
Phone: +65-6358-2160  
Fax: +65-6358-2015  
e-mail: [singaporesales@power.com](mailto:singaporesales@power.com)

**Taiwan**

5F, No. 318, Nei Hu Rd., Sec. 1  
Nei Hu Dist.  
Taipei 11493, Taiwan R.O.C.  
Phone: +886-2-2659-4570  
Fax: +886-2-2659-4550  
e-mail: [taiwansales@power.com](mailto:taiwansales@power.com)

**UK**

Cambridge Semiconductor,  
a Power Integrations company  
Westbrook Centre, Block 5, 2nd Floor  
Milton Road  
Cambridge CB4 1YG  
Phone: +44 (0) 1223-446483  
e-mail: [eurosales@power.com](mailto:eurosales@power.com)

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.