

P1168.474NLT Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	P1168.474NLT-DG
Manufacturer	Pulse Electronics
Manufacturer Product Number	P1168.474NLT
Description	FIXED IND 470UH 570MA 1.403 OHM
Detailed Description	470 μ H Shielded Wirewound Inductor 570 mA 1.403 Ohm Max Nonstandard



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

P1168.474NLT

Series:

P1168NL

Type:

Wirewound

Inductance:

470 μ H

Current Rating (Amps):

570 mA

Shielding:

Shielded

Q @ Freq:

-

Ratings:

-

Inductance Frequency - Test:

100 kHz

Mounting Type:

Surface Mount

Supplier Device Package:

-

Height - Seated (Max):

0.177" (4.50mm)

Manufacturer:

Pulse Electronics

Product Status:

Active

Material - Core:

-

Tolerance:

\pm 20%

Current - Saturation (Isat):

570mA

DC Resistance (DCR):

1.403Ohm Max

Frequency - Self Resonant:

2.4MHz

Operating Temperature:

-40°C ~ 130°C

Features:

-

Package / Case:

Nonstandard

Size / Dimension:

0.482" L x 0.482" W (12.24mm x 12.24mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.4000

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

SMT Power Inductors

Shielded Drum Core - P1168NL/P1169NL Series



-  **Height:** 4.5mm Max
-  **Footprint:** 12.2mm x 12.2mm Max
-  **Current Rating:** up to 14A
-  **Inductance Range:** .32 μ H to 750 μ H



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C

Part ^{2,3} Numbers		Inductance @ 0A _{DC} (μ H \pm 20%)	Inductance @ Irated ⁵ (μ H) MIN	Irated ⁵ (A _{DC})	DCR (m Ω)		Saturation ⁶ Current -25% (A)	Heating ⁷ Current +40°C (A)	Core Loss ⁸ Factor (KZ)	SRF (MHz)
					TYP	MAX				
P1168.501NL	P1169.501NL	0.5*	0.32	14	1.9	2.3	18	14	100	>40
P1168.102NL	P1169.102NL **	1.0*	0.65	11	3.0	3.7	14	11	150	>40
P1168.162NL	P1169.162NL	1.6*	1.0	8.5	5.4	6.3	10	8.5	180	>40
P1168.242NL	P1169.242NL **	2.4*	1.6	7.5	6.9	8.1	8.1	7.5	220	>40
P1168.332NL	P1169.332NL	3.3*	2.2	6.4	9.5	11	7.3	6.4	260	>40
P1168.452NL	P1169.452NL **	4.5*	2.9	6.0	11	13	6.4	6.0	310	35
P1168.562NL	P1169.562NL	5.6*	3.6	5.5	13	15	5.7	5.5	340	30
P1168.682NL	P1169.682NL	6.8*	4.4	4.6	18	22	5.2	4.6	370	27
P1168.103NL	P1169.103NL **	10	7.5	3.6	29	35	4.1	3.6	440	21
P1168.123NL	P1169.123NL **	12	9.0	3.5	32	37	3.8	3.5	490	19
P1168.153NL	P1169.153NL **	15	11.3	3.1	40	47	3.3	3.1	570	17
P1168.183NL	P1169.183NL	18	13.5	2.8	48	58	2.9	2.8	590	15
P1168.223NL **	P1169.223NL **	22	16.5	2.6	55	67	2.7	2.6	640	13
P1168.273NL	P1169.273NL **	27	20.3	2.4	67	79	2.4	2.4	740	12
P1168.333NL **	P1169.333NL **	33	24.8	2.2	76	94	2.2	2.2	820	11
P1168.393NL **	P1169.393NL **	39	29.3	1.9	101	126	2.0	1.9	880	10
P1168.473NL	P1169.473NL	47	35.3	1.8	112	140	1.9	1.8	980	9.0
P1168.563NL	P1169.563NL **	56	42.0	1.7	129	157	1.7	1.7	1000	8.0
P1168.683NL	P1169.683NL	68	51.0	1.5	169	202	1.5	1.6	1200	7.0
P1168.823NL	P1169.823NL **	82	61.5	1.4	191	232	1.4	1.5	1300	6.0
P1168.104NL	P1169.104NL **	100	75.0	1.2	222	270	1.2	1.4	1400	6.0
P1168.124NL	P1169.124NL **	120	90.0	1.1	252	316	1.1	1.3	1500	5.5
P1168.154NL	P1169.154NL **	150	113	1.0	346	456	1.0	1.1	1700	4.9
P1168.184NL	P1169.184NL **	180	135	0.90	385	497	0.90	1.1	1900	4.4
P1168.224NL **	P1169.224NL	220	165	0.80	506	681	0.80	0.93	2100	3.7
P1168.274NL **	P1169.274NL **	270	203	0.70	596	775	0.70	0.85	2300	3.3
P1168.334NL	P1169.334NL	330	248	0.66	764	955	0.66	0.75	2600	2.8
P1168.394NL **	P1169.394NL **	390	293	0.62	870	1087	0.62	0.71	2800	2.6
P1168.474NL	P1169.474NL	470	353	0.57	1150	1403	0.57	0.61	3100	2.4
P1168.564NL	P1169.564NL **	560	420	0.53	1283	1623	0.53	0.58	3300	2.2
P1168.684NL	P1169.684NL **	680	510	0.50	1493	1824	0.50	0.54	3700	2.1
P1168.824NL **	P1169.824NL **	820	615	0.44	1924	2355	0.44	0.47	4000	1.7
P1168.105NL	P1169.105NL **	1000	750	0.40	2174	2850	0.40	0.45	4500	1.5

* Inductance is at 0A_{DC} tolerance on indicated part numbers is \pm 30%; tolerance is \pm 20% on all other parts.


SMT Power Inductors

Shielded Drum Core - P1168NL/P1169NL Series



Mechanical

Schematic

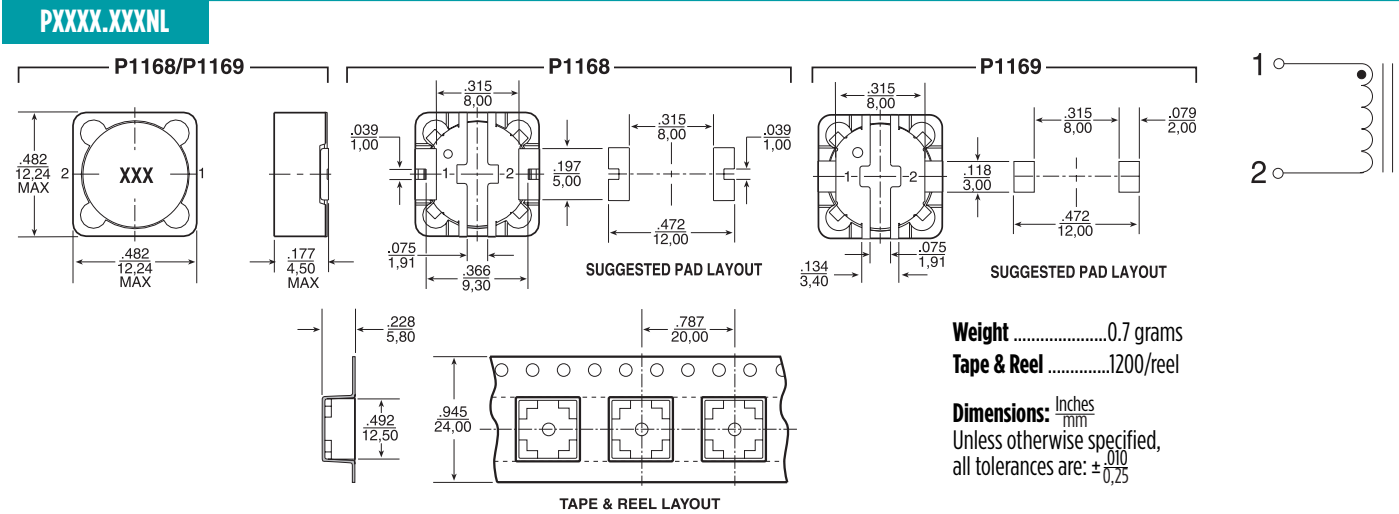

Notes:

1. Unless otherwise specified, all testing is made at 100kHz, 0.1VAC.
2. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e P1166.102NL becomes P1166.102NLT). Pulse complies with industry standard Tape and Tape & Reel specification EIA481.
3. The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" version, but an RoHS compliant version is required, please contact Pulse for availability.
4. Temperature of the component (ambient plus temperature rise) must be within specified operating temperature range.
5. The rated current (I_{rated}) as listed is either the saturation current or the heating current depending on which value is lower.
6. The saturation current, I_{sat}, is the current at which the component inductance drops by the indicated percentage (typical) at an ambient temperature of 25C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
7. The heating current, I_{dc}, is the DC current required to raise the component temperature by the indicated delta (approximately). The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test.

8. In high volt*time (Et) or ripple current applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. In order to determine the approximate total loss (or temperature rise) for a given application, both copper losses and core losses should be taken into account.

Estimated Temperature Rise:

$$Trise = [Total\ loss\ (mW) / K0]^{.833} (^{\circ}C)$$

$$Total\ Loss = Copper\ loss + Core\ loss\ (mW)$$

$$Copper\ loss = I_{RMS}^2 \times DCR\ (Typical)\ (mW)$$

$$I_{RMS} = [I_{DC}^2 + \Delta I^2 / 12]^{1/2}\ (A)$$

$$Core\ loss = K1 \times f\ (kHz)^{1.25} \times Bac\ (Ga)^{2.38}\ (mW)$$

$$Bac\ (peak\ to\ peak\ flux\ density) = K2 \times \Delta I\ (Ga)$$

$$[= K2/L\ (\mu H) \times Et\ (V-\mu Sec)\ (Ga)]$$

where f varies between 25kHz and 1MHz, and Bac is less than 2500 Gauss.

K2 is a core size and winding dependent value and is given for each p/n in the preceding datasheets. K0 & K1 are platform and material dependant constants and are given in the table below for each platform.


** Contact Pulse for availability

SMT Power Inductors

Shielded Drum Core - P1168NL/P1169NL Series



Part No.	Trise Factor (K0)	Core Loss Factor (K1)
PG0085/86	2.3	5.29E-10
PG0087	5.8	15.2E-10
PG0040/41	0.8	2.80E-10
P1174	0.8	6.47E-10
PF0601	4.6	14.0E-10
PF0464	3.6	24.7E-10
PF0465	3.6	33.4E-10
P1166	1.9	29.6E-10
P1167	2.1	42.2E-10
PF0560NL	5.5	136E-10
P1168/69	4.8	184E-10
P1170/71	4.3	201E-10
P1172/73	5.6	411E-10
PF0552NL	8.3	201E-10
PF0553NL	7.1	411E-10

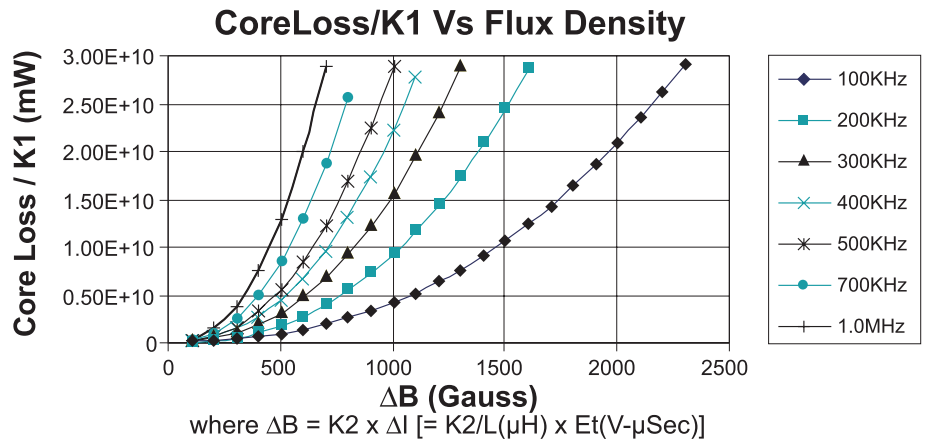

Take note that the component's temperature rise varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.

For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen,
P.R. China 518057

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Pulse South Asia

3 Fraser Street 0428
DUO Tower
Singapore 189352

Pulse North Asia

1F., No.111 Xiyuan Road
Zhongli District
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Tel: 86 755 33966678
Fax: 86 755 33966700

Tel: 86 21 62787060
Fax: 86 2162786973

Tel: 65 6287 8998
Fax: 65 6280 0080

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.