

HT06CW104JC Datasheet



<https://www.DiGi-Electronics.com>

| | |
|------------------------------|--|
| DiGi Electronics Part Number | HT06CW104JC-DG |
| Manufacturer | KEMET |
| Manufacturer Product Number | HT06CW104JC |
| Description | CAP CER 0.1UF 100V X7R RAD |
| Detailed Description | 0.1 μ F \pm 5% 100V Ceramic Capacitor X7R Radial |

This model HT06CW104JC is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

HT06CW104JC

Series:

HThP LDD Indust X7R HT200C

Capacitance:

0.1 μ F

Voltage - Rated:

100V

Operating Temperature:

-55°C ~ 200°C

Ratings:

-

Failure Rate:

-

Package / Case:

Radial

Height - Seated (Max):

0.300" (7.62mm)

Lead Spacing:

0.200" (5.08mm)

Manufacturer:

KEMET

Product Status:

Obsolete

Tolerance:

\pm 5%

Temperature Coefficient:

X7R

Features:

High Temperature

Applications:

General Purpose

Mounting Type:

Through Hole

Size / Dimension:

0.300" L x 0.150" W (7.62mm x 3.81mm)

Thickness (Max):

-

Lead Style:

Straight

Environmental & Export classification

Moisture Sensitivity Level (MSL):

Not Applicable

HTSUS:

8532.24.0060

ECCN:

EAR99

High Temperature (+200 °C) Axial and Radial Ceramic Capacitors

HT/HP Series

FEATURES

The HT/HP Series is used in robust applications


- Down Hole
- Industrial
- Harsh Environments

Where a Radial/Axial coated capacitor can withstand high temperatures (200°C).

NOTE:

Other tolerances, higher capacitance values, voltages, or special package configurations are available upon request.

CAPACITOR OUTLINE DRAWING

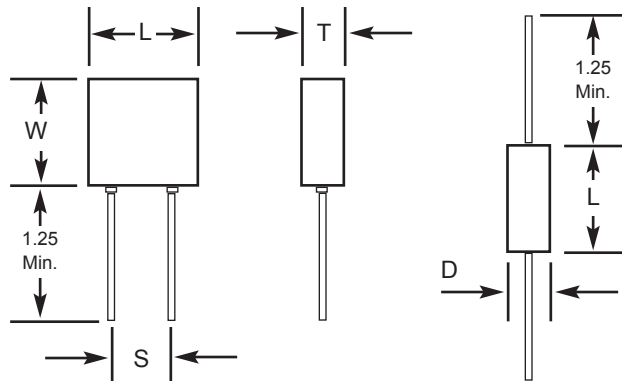

DIMENSIONS


Molded (HT) and Conformal Coated (HP), Radial Lead Types

| Style | Sizes in Inches (mm) max | | | Lead Spacing ±0.030 (S) |
|-------|--------------------------|--------------|---------------|----------------------------|
| | Length (L) | Width (W) | Thickness (T) | |
| HT05 | .200 (5.08) | .200 (5.08) | .100 (2.54) | .100 (2.54) |
| HT55 | .200 (5.08) | .200 (5.08) | .100 (2.54) | .200 (5.08) |
| HT06 | .300 (7.62) | .300 (7.62) | .150 (3.81) | .200 (5.08) |
| HT08 | .500 (12.70) | .500 (12.70) | .250 (6.35) | .400 (10.16) |
| HT09 | .700 (17.78) | .400 (10.16) | .200 (5.08) | .500 (12.70) |

Tubular Case, Axial Lead Types

| Style | Sizes in Inches (mm) max | |
|-------|--------------------------|--------------|
| | Length (L) | Diameter (D) |
| HT11 | .170 (4.32) | .100 (2.54) |
| HT13 | .260 (6.60) | .135 (3.43) |
| HT14 | .400 (10.16) | .155 (3.94) |
| HT15 | .500 (12.70) | .200 (5.08) |
| HT16 | .750 (19.05) | .375 (9.52) |

PART NUMBER AND ORDERING INFORMATION

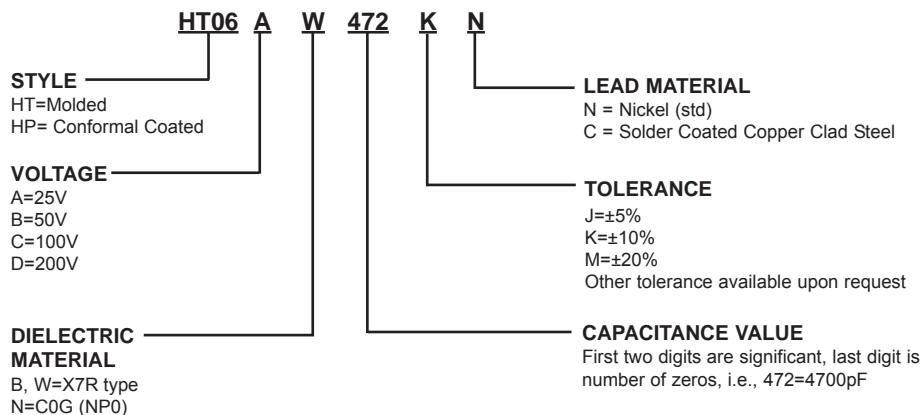

MARKING
(HT05, HT55, HT11)
472K
KEC

(All other sizes)
HT06AW472K
KEC
Date Code

For CONFORMAL COATED types, change style number to HPXX. HP dimensions will be reduced slightly.

COG & X7R DIELECTRIC

| COG RADIAL | | | | | | | | | | | | | | | | | | |
|------------|----------|----------|-----|-----|----------|-----|-----|----------|-----|-----|----------|-----|-----|----------|-----|-----|--|--|
| STYLE | | HT/HP 05 | | | HT/HP 55 | | | HT/HP 06 | | | HT/HP 08 | | | HT/HP 09 | | | | |
| Cap | Cap Code | 50 | 100 | 200 | 50 | 100 | 200 | 50 | 100 | 200 | 50 | 100 | 200 | 50 | 100 | 200 | | |
| | 22pF | 220 | | | | | | | | | | | | | | | | |
| 27 | 270 | | | | | | | | | | | | | | | | | |
| 33 | 330 | | | | | | | | | | | | | | | | | |
| 39 | 390 | | | | | | | | | | | | | | | | | |
| 47 | 470 | | | | | | | | | | | | | | | | | |
| 56 | 560 | | | | | | | | | | | | | | | | | |
| 68 | 680 | | | | | | | | | | | | | | | | | |
| 82 | 820 | | | | | | | | | | | | | | | | | |
| 100 | 101 | | | | | | | | | | | | | | | | | |
| 120 | 121 | | | | | | | | | | | | | | | | | |
| 150 | 151 | | | | | | | | | | | | | | | | | |
| 180 | 181 | | | | | | | | | | | | | | | | | |
| 220 | 221 | | | | | | | | | | | | | | | | | |
| 270 | 271 | | | | | | | | | | | | | | | | | |
| 330 | 331 | | | | | | | | | | | | | | | | | |
| 390 | 391 | | | | | | | | | | | | | | | | | |
| 470 | 471 | | | | | | | | | | | | | | | | | |
| 560 | 561 | | | | | | | | | | | | | | | | | |
| 680 | 681 | | | | | | | | | | | | | | | | | |
| 820 | 821 | | | | | | | | | | | | | | | | | |
| 1000 | 102 | | | | | | | | | | | | | | | | | |
| 1200 | 122 | | | | | | | | | | | | | | | | | |
| 1500 | 152 | | | | | | | | | | | | | | | | | |
| 1800 | 182 | | | | | | | | | | | | | | | | | |
| 2200 | 222 | | | | | | | | | | | | | | | | | |
| 2700 | 272 | | | | | | | | | | | | | | | | | |
| 3300 | 332 | | | | | | | | | | | | | | | | | |
| 3900 | 392 | | | | | | | | | | | | | | | | | |
| 4700 | 472 | | | | | | | | | | | | | | | | | |
| 5600 | 562 | | | | | | | | | | | | | | | | | |
| 6800 | 682 | | | | | | | | | | | | | | | | | |
| 8200 | 822 | | | | | | | | | | | | | | | | | |
| .010 uF | 103 | | | | | | | | | | | | | | | | | |
| 0.012 | 123 | | | | | | | | | | | | | | | | | |
| 0.015 | 153 | | | | | | | | | | | | | | | | | |
| 0.018 | 183 | | | | | | | | | | | | | | | | | |
| 0.022 | 223 | | | | | | | | | | | | | | | | | |
| 0.027 | 273 | | | | | | | | | | | | | | | | | |
| 0.033 | 333 | | | | | | | | | | | | | | | | | |
| 0.039 | 393 | | | | | | | | | | | | | | | | | |
| 0.047 | 473 | | | | | | | | | | | | | | | | | |
| 0.056 | 563 | | | | | | | | | | | | | | | | | |
| 0.068 | 683 | | | | | | | | | | | | | | | | | |
| 0.082 | 823 | | | | | | | | | | | | | | | | | |
| 0.10 | 104 | | | | | | | | | | | | | | | | | |
| 0.12 | 124 | | | | | | | | | | | | | | | | | |

| X7R RADIAL | | | | | | | | | | | | | | | | | | |
|------------|----------|----------|-----|-----|----------|-----|-----|----------|-----|-----|----------|-----|-----|----------|-----|-----|--|--|
| STYLE | | HT/HP 05 | | | HT/HP 55 | | | HT/HP 06 | | | HT/HP 08 | | | HT/HP 09 | | | | |
| Cap | Cap Code | 50 | 100 | 200 | 50 | 100 | 200 | 50 | 100 | 200 | 50 | 100 | 200 | 50 | 100 | 200 | | |
| | 1000pF | 102 | | | | | | | | | | | | | | | | |
| 1200 | 122 | | | | | | | | | | | | | | | | | |
| 1500 | 152 | | | | | | | | | | | | | | | | | |
| 1800 | 182 | | | | | | | | | | | | | | | | | |
| 2200 | 222 | | | | | | | | | | | | | | | | | |
| 2700 | 272 | | | | | | | | | | | | | | | | | |
| 3300 | 332 | | | | | | | | | | | | | | | | | |
| 3900 | 392 | | | | | | | | | | | | | | | | | |
| 4700 | 472 | | | | | | | | | | | | | | | | | |
| 5600 | 562 | | | | | | | | | | | | | | | | | |
| 6800 | 682 | | | | | | | | | | | | | | | | | |
| 8200 | 822 | | | | | | | | | | | | | | | | | |
| .010 uF | 103 | | | | | | | | | | | | | | | | | |
| 0.012 | 123 | | | | | | | | | | | | | | | | | |
| 0.015 | 153 | | | | | | | | | | | | | | | | | |
| 0.018 | 183 | | | | | | | | | | | | | | | | | |
| 0.022 | 223 | | | | | | | | | | | | | | | | | |
| 0.027 | 273 | | | | | | | | | | | | | | | | | |
| 0.033 | 333 | | | | | | | | | | | | | | | | | |
| 0.039 | 393 | | | | | | | | | | | | | | | | | |
| 0.047 | 473 | | | | | | | | | | | | | | | | | |
| 0.056 | 563 | | | | | | | | | | | | | | | | | |
| 0.068 | 683 | | | | | | | | | | | | | | | | | |
| 0.082 | 823 | | | | | | | | | | | | | | | | | |
| 0.10 | 104 | | | | | | | | | | | | | | | | | |
| 0.12 | 124 | | | | | | | | | | | | | | | | | |
| 0.15 | 154 | | | | | | | | | | | | | | | | | |
| 0.18 | 184 | | | | | | | | | | | | | | | | | |
| 0.22 | 224 | | | | | | | | | | | | | | | | | |
| 0.27 | 274 | | | | | | | | | | | | | | | | | |
| 0.33 | 334 | | | | | | | | | | | | | | | | | |
| 0.39 | 394 | | | | | | | | | | | | | | | | | |
| 0.47 | 474 | | | | | | | | | | | | | | | | | |
| 0.56 | 564 | | | | | | | | | | | | | | | | | |
| 0.68 | 684 | | | | | | | | | | | | | | | | | |
| 0.82 | 824 | | | | | | | | | | | | | | | | | |
| 1.0 | 105 | | | | | | | | | | | | | | | | | |
| 1.2 | 125 | | | | | | | | | | | | | | | | | |
| 1.5 | 155 | | | | | | | | | | | | | | | | | |
| 1.8 | 185 | | | | | | | | | | | | | | | | | |
| 2.2 | 225 | | | | | | | | | | | | | | | | | |
| 2.7 | 275 | | | | | | | | | | | | | | | | | |
| 3.3 | 335 | | | | | | | | | | | | | | | | | |
| 3.9 | 395 | | | | | | | | | | | | | | | | | |
| 4.7 | 475 | | | | | | | | | | | | | | | | | |
| 5.6 | 565 | | | | | | | | | | | | | | | | | |

High Temperature (+200 C) Axial and Radial Ceramic Capacitors HT/HP Series

COG & X7R DIELECTRIC

| COG AXIAL | | | | | | | | | | | | | | | | |
|-----------|-----------|-------------|-----|-----|-------------|-----|-----|--------------|-----|-----|--------------|-----|-----|--------------|-----|-----|
| STYLE | | HT/HP 11 | | | HT/HP 13 | | | HT/HP 14 | | | HT/HP 15 | | | HT/HP 16 | | |
| Cap | L MAX | .170 (4.32) | | | .260 (6.60) | | | .400 (10.16) | | | .500 (12.70) | | | .750 (19.05) | | |
| | D MAX | .100 (2.54) | | | .135 (3.43) | | | .155 (3.94) | | | .200 (5.08) | | | .375 (9.52) | | |
| | Lead Dia. | .025 (.635) | | | .025 (.635) | | | .025 (.635) | | | .025 (.635) | | | .025 (.635) | | |
| Cap Code | | WVDC | | | WVDC | | | WVDC | | | WVDC | | | WVDC | | |
| | | 50 | 100 | 200 | 50 | 100 | 200 | 50 | 100 | 200 | 50 | 100 | 200 | 50 | 100 | 200 |
| 5.6pF | 569 | | | | | | | | | | | | | | | |
| 6.8 | 689 | | | | | | | | | | | | | | | |
| 8.2 | 829 | | | | | | | | | | | | | | | |
| 10 | 100 | | | | | | | | | | | | | | | |
| 12 | 120 | | | | | | | | | | | | | | | |
| 15 | 150 | | | | | | | | | | | | | | | |
| 18 | 180 | | | | | | | | | | | | | | | |
| 22 | 220 | | | | | | | | | | | | | | | |
| 27 | 270 | | | | | | | | | | | | | | | |
| 33 | 330 | | | | | | | | | | | | | | | |
| 39 | 390 | | | | | | | | | | | | | | | |
| 47 | 470 | | | | | | | | | | | | | | | |
| 56 | 560 | | | | | | | | | | | | | | | |
| 68 | 680 | | | | | | | | | | | | | | | |
| 82 | 820 | | | | | | | | | | | | | | | |
| 100 | 101 | | | | | | | | | | | | | | | |
| 120 | 121 | | | | | | | | | | | | | | | |
| 150 | 151 | | | | | | | | | | | | | | | |
| 180 | 181 | | | | | | | | | | | | | | | |
| 220 | 221 | | | | | | | | | | | | | | | |
| 270 | 271 | | | | | | | | | | | | | | | |
| 330 | 331 | | | | | | | | | | | | | | | |
| 390 | 391 | | | | | | | | | | | | | | | |
| 470 | 471 | | | | | | | | | | | | | | | |
| 560 | 561 | | | | | | | | | | | | | | | |
| 680 | 681 | | | | | | | | | | | | | | | |
| 820 | 821 | | | | | | | | | | | | | | | |
| 1000 | 102 | | | | | | | | | | | | | | | |
| 1200 | 122 | | | | | | | | | | | | | | | |
| 1500 | 152 | | | | | | | | | | | | | | | |
| 1800 | 182 | | | | | | | | | | | | | | | |
| 2200 | 222 | | | | | | | | | | | | | | | |
| 2700 | 272 | | | | | | | | | | | | | | | |
| 3300 | 332 | | | | | | | | | | | | | | | |
| 3900 | 392 | | | | | | | | | | | | | | | |
| 4700 | 472 | | | | | | | | | | | | | | | |
| 5600 | 562 | | | | | | | | | | | | | | | |
| 6800 | 682 | | | | | | | | | | | | | | | |
| 8200 | 822 | | | | | | | | | | | | | | | |
| .010 uF | 103 | | | | | | | | | | | | | | | |
| 0.012 | 123 | | | | | | | | | | | | | | | |
| 0.015 | 153 | | | | | | | | | | | | | | | |
| 0.018 | 183 | | | | | | | | | | | | | | | |
| 0.022 | 223 | | | | | | | | | | | | | | | |
| 0.027 | 273 | | | | | | | | | | | | | | | |
| 0.033 | 333 | | | | | | | | | | | | | | | |
| 0.039 | 393 | | | | | | | | | | | | | | | |
| 0.047 | 473 | | | | | | | | | | | | | | | |
| 0.056 | 563 | | | | | | | | | | | | | | | |
| 0.068 | 683 | | | | | | | | | | | | | | | |
| 0.082 | 823 | | | | | | | | | | | | | | | |
| 0.10 | 104 | | | | | | | | | | | | | | | |

| X7R AXIAL | | | | | | | | | | | | | | | | |
|-----------|-----------|-------------|-----|-----|-------------|-----|-----|--------------|-----|-----|--------------|-----|-----|--------------|-----|-----|
| STYLE | | HT/HP 11 | | | HT/HP 13 | | | HT/HP 14 | | | HT/HP 15 | | | HT/HP 16 | | |
| Cap | L MAX | .170 (4.32) | | | .260 (6.60) | | | .400 (10.16) | | | .500 (12.70) | | | .750 (19.05) | | |
| | D MAX | .100 (2.54) | | | .135 (3.43) | | | .155 (3.94) | | | .200 (5.08) | | | .375 (9.52) | | |
| | Lead Dia. | .025 (.635) | | | .025 (.635) | | | .025 (.635) | | | .025 (.635) | | | .025 (.635) | | |
| Cap Code | | WVDC | | | WVDC | | | WVDC | | | WVDC | | | WVDC | | |
| | | 50 | 100 | 200 | 50 | 100 | 200 | 50 | 100 | 200 | 50 | 100 | 200 | 50 | 100 | 200 |
| 100pF | 101 | | | | | | | | | | | | | | | |
| 120 | 121 | | | | | | | | | | | | | | | |
| 150 | 151 | | | | | | | | | | | | | | | |
| 180 | 181 | | | | | | | | | | | | | | | |
| 220 | 221 | | | | | | | | | | | | | | | |
| 270 | 271 | | | | | | | | | | | | | | | |
| 330 | 331 | | | | | | | | | | | | | | | |
| 390 | 391 | | | | | | | | | | | | | | | |
| 470 | 471 | | | | | | | | | | | | | | | |
| 560 | 561 | | | | | | | | | | | | | | | |
| 680 | 681 | | | | | | | | | | | | | | | |
| 820 | 821 | | | | | | | | | | | | | | | |
| 1000 | 102 | | | | | | | | | | | | | | | |
| 1200 | 122 | | | | | | | | | | | | | | | |
| 1500 | 152 | | | | | | | | | | | | | | | |
| 1800 | 182 | | | | | | | | | | | | | | | |
| 2200 | 222 | | | | | | | | | | | | | | | |
| 2700 | 272 | | | | | | | | | | | | | | | |
| 3300 | 332 | | | | | | | | | | | | | | | |
| 3900 | 392 | | | | | | | | | | | | | | | |
| 4700 | 472 | | | | | | | | | | | | | | | |
| 5600 | 562 | | | | | | | | | | | | | | | |
| 6800 | 682 | | | | | | | | | | | | | | | |
| 8200 | 822 | | | | | | | | | | | | | | | |
| .010uF | 103 | | | | | | | | | | | | | | | |
| 0.012 | 123 | | | | | | | | | | | | | | | |
| 0.015 | 153 | | | | | | | | | | | | | | | |
| 0.018 | 183 | | | | | | | | | | | | | | | |
| 0.022 | 223 | | | | | | | | | | | | | | | |
| 0.027 | 273 | | | | | | | | | | | | | | | |
| 0.033 | 333 | | | | | | | | | | | | | | | |
| 0.039 | 393 | | | | | | | | | | | | | | | |
| 0.047 | 473 | | | | | | | | | | | | | | | |
| 0.056 | 563 | | | | | | | | | | | | | | | |
| 0.068 | 683 | | | | | | | | | | | | | | | |
| 0.082 | 823 | | | | | | | | | | | | | | | |
| 0.1 | 104 | | | | | | | | | | | | | | | |
| 0.12 | 124 | | | | | | | | | | | | | | | |
| 0.15 | 154 | | | | | | | | | | | | | | | |
| 0.18 | 184 | | | | | | | | | | | | | | | |
| 0.22 | 224 | | | | | | | | | | | | | | | |
| 0.27 | 274 | | | | | | | | | | | | | | | |
| 0.33 | 334 | | | | | | | | | | | | | | | |
| 0.39 | 394 | | | | | | | | | | | | | | | |
| 0.47 | 474 | | | | | | | | | | | | | | | |
| 0.56 | 564 | | | | | | | | | | | | | | | |
| 0.68 | 684 | | | | | | | | | | | | | | | |
| 0.82 | 824 | | | | | | | | | | | | | | | |
| 1.0 | 105 | | | | | | | | | | | | | | | |
| 1.2 | 125 | | | | | | | | | | | | | | | |
| 1.5 | 155 | | | | | | | | | | | | | | | |
| 1.8 | 185 | | | | | | | | | | | | | | | |
| 2.2 | 225 | | | | | | | | | | | | | | | |
| 2.7 | 275 | | | | | | | | | | | | | | | |

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.