

# BC547BRL1G Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)



<https://www.DiGi-Electronics.com>

|                              |   |
|------------------------------|---|
| DiGi Electronics Part Number | BC547BRL1G-DG   |
| Manufacturer                 | <a href="#">onsemi</a>  |
| Manufacturer Product Number  | BC547BRL1G  |
| Description                  | TRANS NPN 45V 0.1A TO92   |
| Detailed Description         | Bipolar (BJT) Transistor NPN 45 V 100 mA 300MHz 6 25 mW Through Hole TO-92 (TO-226) |



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

BC547BRL1G

Series:

-

Transistor Type:

NPN

Voltage - Collector Emitter Breakdown (Max):

45 V

Current - Collector Cutoff (Max):

15nA

Power - Max:

625 mW

Operating Temperature:

-55°C ~ 150°C (TJ)

Package / Case:

TO-226-3, TO-92-3 Long Body (Formed Leads)

Base Product Number:

BC547

Manufacturer:

onsemi

Product Status:

Obsolete

Current - Collector (Ic) (Max):

100 mA

Vce Saturation (Max) @ Ib, Ic:

600mV @ 5mA, 100mA

DC Current Gain (hFE) (Min) @ Ic, Vce:

200 @ 2mA, 5V

Frequency - Transition:

300MHz

Mounting Type:

Through Hole

Supplier Device Package:

TO-92 (TO-226)

## Environmental & Export classification

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

REACH Status:

REACH Unaffected

HTSUS:

8541.21.0075


# Amplifier Transistors

## NPN Silicon

### BC546B, BC547A, B, C, BC548B, C

#### Features

- Pb-Free Packages are Available\*



#### MAXIMUM RATINGS


| Rating   | Symbol         | Value       | Unit                       |
|--|----------------|-------------|----------------------------|
| Collector - Emitter Voltage  | $V_{CEO}$      |             | Vdc                        |
|  | BC546          | 65          |                            |
|  | BC547          | 45          |                            |
|  | BC548          | 30          |                            |
| Collector - Base Voltage   | $V_{CBO}$      |             | Vdc                        |
|  | BC546          | 80          |                            |
|  | BC547          | 50          |                            |
|  | BC548          | 30          |                            |
| Emitter - Base Voltage   | $V_{EBO}$      | 6.0         | Vdc                        |
| Collector Current - Continuous   | $I_C$          | 100         | mA <sub>dc</sub>           |
| Total Device Dissipation @ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$          | 625<br>5.0  | mW<br>mW/ $^\circ\text{C}$ |
| Total Device Dissipation @ $T_C = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$          | 1.5<br>12   | W<br>mW/ $^\circ\text{C}$  |
| Operating and Storage Junction<br>Temperature Range                                    | $T_J, T_{stg}$ | -55 to +150 | $^\circ\text{C}$           |

#### THERMAL CHARACTERISTICS


| Characteristic                          | Symbol          | Max  | Unit                      |
|---|-----------------|------|---------------------------|
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ | 200  | $^\circ\text{C}/\text{W}$ |
| Thermal Resistance, Junction-to-Case    | $R_{\theta JC}$ | 83.3 | $^\circ\text{C}/\text{W}$ |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

TO-92  
CASE 29  
STYLE 17

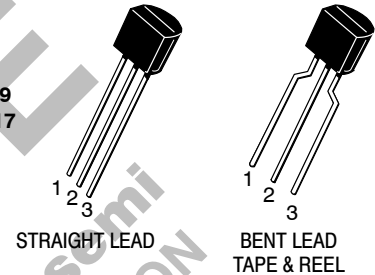

#### MARKING DIAGRAM



- x = 6, 7, or 8
- y = A, B or C
- A = Assembly Location
- Y = Year
- WW = Work Week
- = Pb-Free Package

(Note: Microdot may be in either location)

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

\*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


**BC546B, BC547A, B, C, BC548B, C****ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

| Characteristic  | Symbol  | Min                                    | Typ                              | Max                                    | Unit                        |
|---|---|--|----------------------------------|--|-----------------------------|
| <b>OFF CHARACTERISTICS</b>  |   |  |                                  |  |                             |
| Collector – Emitter Breakdown Voltage<br>( $I_C = 1.0\text{ mA}$ , $I_B = 0$ )  | $V_{(BR)CEO}$<br>BC546<br>BC547<br>BC548                                    | 65<br>45<br>30                         | –<br>–<br>–                      | –<br>–<br>–                            | V                           |
| Collector – Base Breakdown Voltage<br>( $I_C = 100\text{ }\mu\text{A}$ )  | $V_{(BR)CBO}$<br>BC546<br>BC547<br>BC548                                    | 80<br>50<br>30                         | –<br>–<br>–                      | –<br>–<br>–                            | V                           |
| Emitter – Base Breakdown Voltage<br>( $I_E = 10\text{ }\mu\text{A}$ , $I_C = 0$ )   | $V_{(BR)EBO}$<br>BC546<br>BC547<br>BC548                                    | 6.0<br>6.0<br>6.0                      | –<br>–<br>–                      | –<br>–<br>–                            | V                           |
| Collector Cutoff Current<br>( $V_{CE} = 70\text{ V}$ , $V_{BE} = 0$ )<br>( $V_{CE} = 50\text{ V}$ , $V_{BE} = 0$ )<br>( $V_{CE} = 35\text{ V}$ , $V_{BE} = 0$ )<br>( $V_{CE} = 30\text{ V}$ , $T_A = 125^\circ\text{C}$ ) | $I_{CES}$<br>BC546<br>BC547<br>BC548<br>BC546/547/548                       | –<br>–<br>–<br>–                       | 0.2<br>0.2<br>0.2<br>–           | 15<br>15<br>15<br>4.0                  | nA<br><br><br>$\mu\text{A}$ |
| <b>ON CHARACTERISTICS</b>   |   |  |                                  |  |                             |
| DC Current Gain<br>( $I_C = 10\text{ }\mu\text{A}$ , $V_{CE} = 5.0\text{ V}$ )  | $h_{FE}$<br>BC547A<br>BC546B/547B/548B<br>BC548C                            | –<br>–<br>–                            | 90<br>150<br>270                 | –<br>–<br>–                            | –                           |
| ( $I_C = 2.0\text{ mA}$ , $V_{CE} = 5.0\text{ V}$ )   | BC546<br>BC547<br>BC548<br>BC547A<br>BC546B/547B/548B<br>BC547C/BC548C      | 110<br>110<br>110<br>110<br>200<br>420 | –<br>–<br>–<br>180<br>290<br>520 | 450<br>800<br>800<br>220<br>450<br>800 |                             |
| ( $I_C = 100\text{ mA}$ , $V_{CE} = 5.0\text{ V}$ )   | BC547A/548A<br>BC546B/547B/548B<br>BC548C                                   | –<br>–<br>–                            | 120<br>180<br>300                | –<br>–<br>–                            |                             |
| Collector – Emitter Saturation Voltage<br>( $I_C = 10\text{ mA}$ , $I_B = 0.5\text{ mA}$ )<br>( $I_C = 100\text{ mA}$ , $I_B = 5.0\text{ mA}$ )<br>( $I_C = 10\text{ mA}$ , $I_B = \text{See Note 1}$ )                   | $V_{CE(sat)}$   | –<br>–<br>–                            | 0.09<br>0.2<br>0.3               | 0.25<br>0.6<br>0.6                     | V                           |
| Base – Emitter Saturation Voltage<br>( $I_C = 10\text{ mA}$ , $I_B = 0.5\text{ mA}$ )   | $V_{BE(sat)}$   | –                                      | 0.7                              | –                                      | V                           |
| Base – Emitter On Voltage<br>( $I_C = 2.0\text{ mA}$ , $V_{CE} = 5.0\text{ V}$ )<br>( $I_C = 10\text{ mA}$ , $V_{CE} = 5.0\text{ V}$ )  | $V_{BE(on)}$  | 0.55<br>–                              | –<br>–                           | 0.7<br>0.77                            | V                           |
| <b>SMALL-SIGNAL CHARACTERISTICS</b>   |   |  |                                  |  |                             |
| Current – Gain – Bandwidth Product<br>( $I_C = 10\text{ mA}$ , $V_{CE} = 5.0\text{ V}$ , $f = 100\text{ MHz}$ )   | $f_T$<br>BC546<br>BC547<br>BC548  | 150<br>150<br>150                      | 300<br>300<br>300                | –<br>–<br>–                            | MHz                         |
| Output Capacitance<br>( $V_{CB} = 10\text{ V}$ , $I_C = 0$ , $f = 1.0\text{ MHz}$ )   | $C_{obo}$   | –                                      | 1.7                              | 4.5                                    | pF                          |
| Input Capacitance<br>( $V_{EB} = 0.5\text{ V}$ , $I_C = 0$ , $f = 1.0\text{ MHz}$ )   | $C_{ibo}$   | –                                      | 10                               | –                                      | pF                          |
| Small – Signal Current Gain<br>( $I_C = 2.0\text{ mA}$ , $V_{CE} = 5.0\text{ V}$ , $f = 1.0\text{ kHz}$ )   | $h_{fe}$<br>BC546<br>BC547/548<br>BC547A<br>BC546B/547B/548B<br>BC547C/548C | 125<br>125<br>125<br>240<br>450        | –<br>–<br>220<br>330<br>600      | 500<br>900<br>260<br>500<br>900        | –                           |
| Noise Figure ( $I_C = 0.2\text{ mA}$ , $V_{CE} = 5.0\text{ V}$ , $R_S = 2\text{ k}\Omega$ , $f = 1.0\text{ kHz}$ , $\Delta f = 200\text{ Hz}$ )   | NF<br>BC546<br>BC547<br>BC548   | –<br>–<br>–                            | 2.0<br>2.0<br>2.0                | 10<br>10<br>10                         | dB                          |


1.  $I_B$  is value for which  $I_C = 11\text{ mA}$  at  $V_{CE} = 1.0\text{ V}$ .

**BC546B, BC547A, B, C, BC548B, C**


**BC547/BC548**

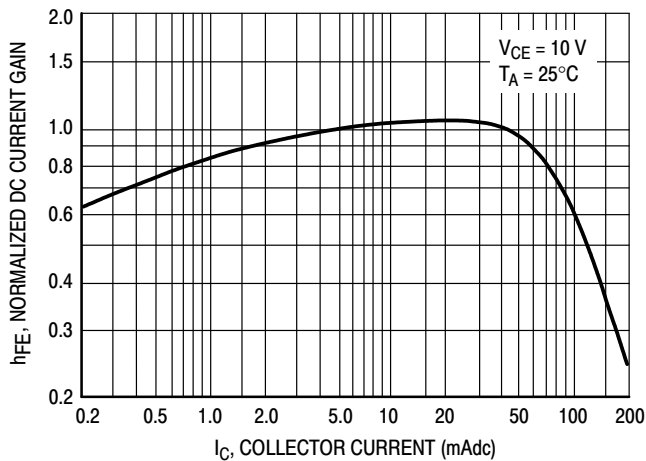


**Figure 1. Normalized DC Current Gain**

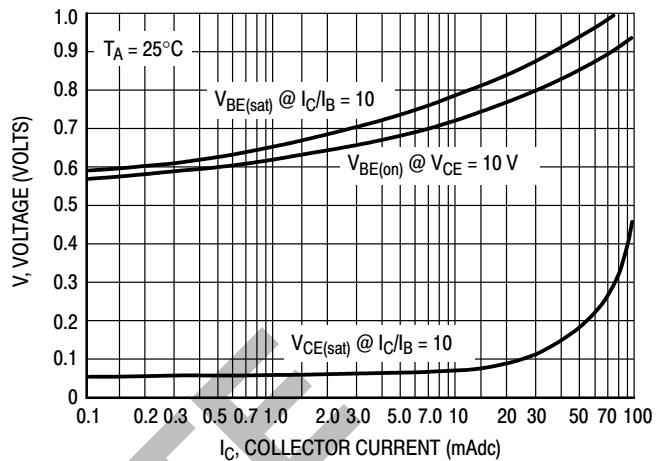


**Figure 2. "Saturation" and "On" Voltages**

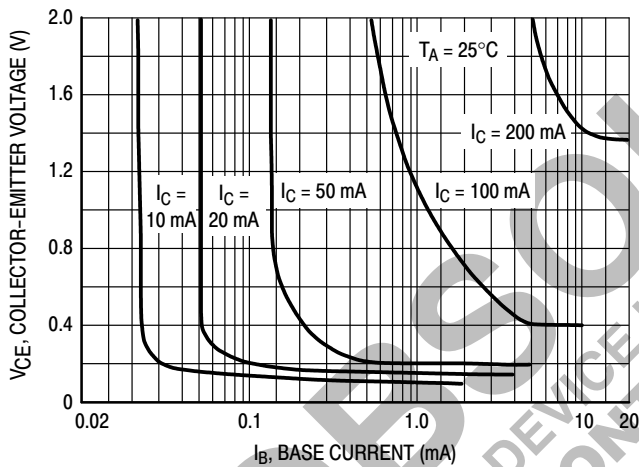


**Figure 3. Collector Saturation Region**

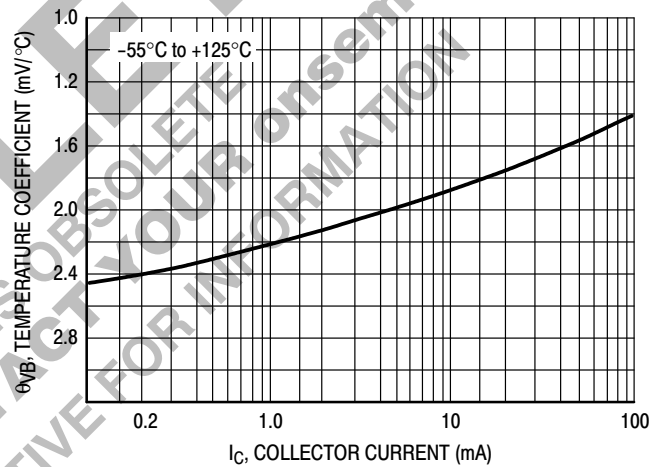

**Figure 4. Base-Emitter Temperature Coefficient**

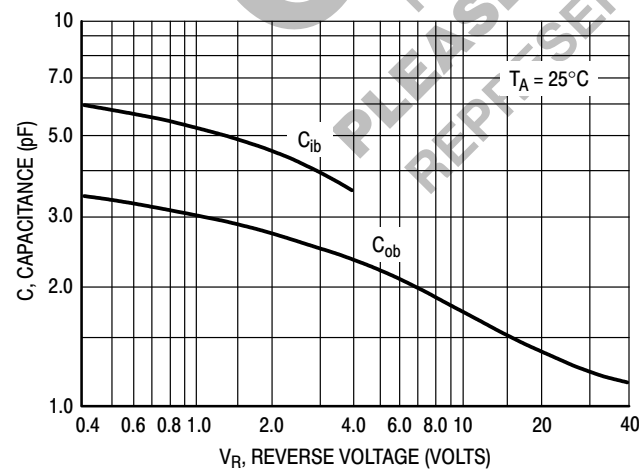


**Figure 5. Capacitances**

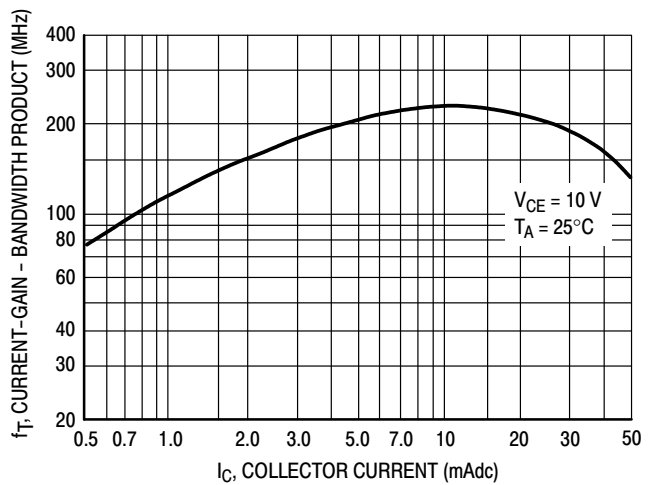


**Figure 6. Current-Gain - Bandwidth Product**

**BC546B, BC547A, B, C, BC548B, C**


**BC546**

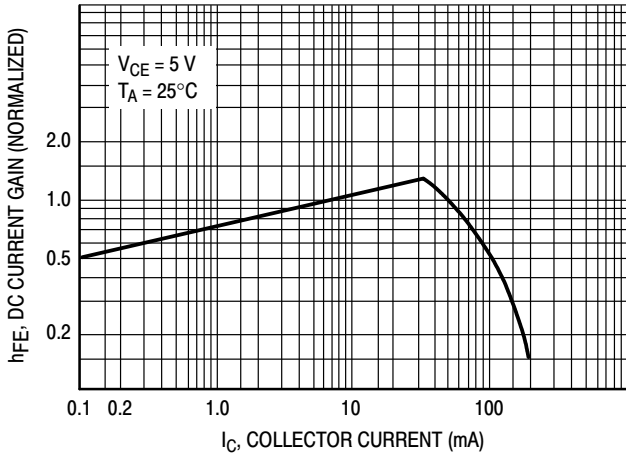


**Figure 7. DC Current Gain**

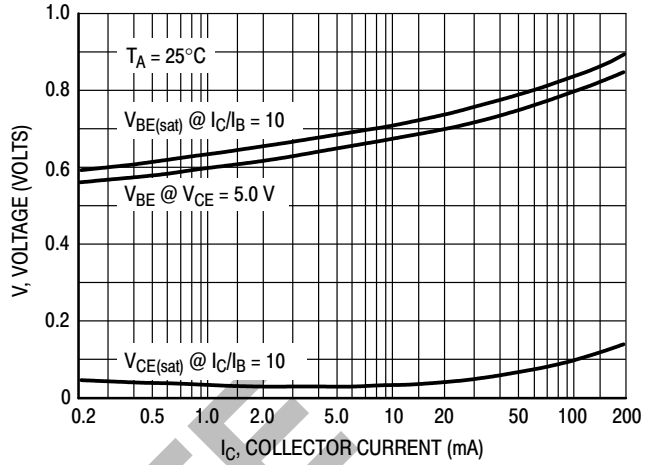


**Figure 8. "On" Voltage**

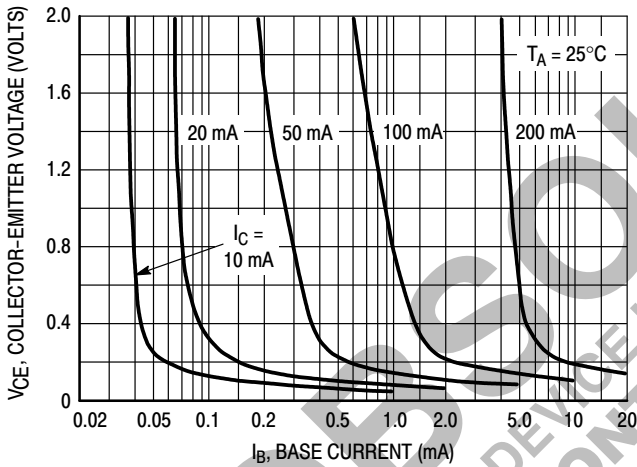


**Figure 9. Collector Saturation Region**

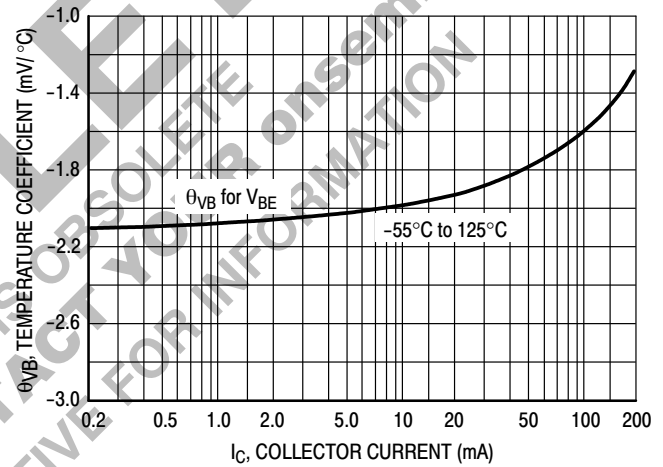

**Figure 10. Base-Emitter Temperature Coefficient**

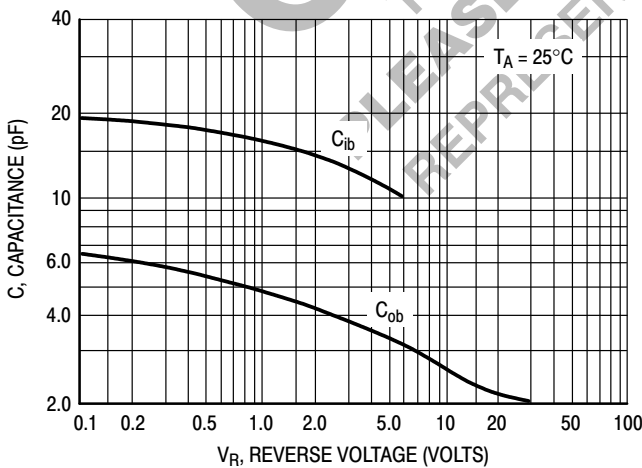

**Figure 11. Capacitance**

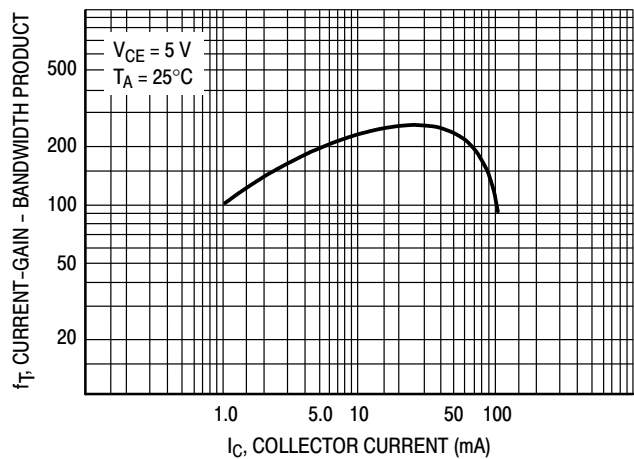

**Figure 12. Current-Gain - Bandwidth Product**


**BC546B, BC547A, B, C, BC548B, C****ORDERING INFORMATION**

| Device     | Package            | Shipping†          |
|------------|--------------------|--------------------|
| BC546B     | TO-92              | 5000 Units / Bulk  |
| BC546BG    | TO-92<br>(Pb-Free) | 5000 Units / Bulk  |
| BC546BRL1  | TO-92              | 2000 / Tape & Reel |
| BC546BRL1G | TO-92<br>(Pb-Free) | 2000 / Tape & Reel |
| BC546BZL1G | TO-92<br>(Pb-Free) | 2000 / Ammo Box    |
| BC547ARL   | TO-92              | 2000 / Tape & Reel |
| BC547ARLG  | TO-92<br>(Pb-Free) | 2000 / Tape & Reel |
| BC547AZL1G | TO-92<br>(Pb-Free) | 2000 / Ammo Box    |
| BC547BG    | TO-92<br>(Pb-Free) | 5000 Units / Bulk  |
| BC547BRL1G | TO-92<br>(Pb-Free) | 2000 / Tape & Reel |
| BC547BZL1G | TO-92<br>(Pb-Free) | 2000 / Ammo Box    |
| BC547CG    | TO-92<br>(Pb-Free) | 5000 Units / Bulk  |
| BC547CZL1G | TO-92<br>(Pb-Free) | 2000 / Ammo Box    |
| BC548BG    | TO-92<br>(Pb-Free) | 5000 Units / Bulk  |
| BC548BRL1G | TO-92<br>(Pb-Free) | 2000 / Tape & Reel |
| BC548BZL1G | TO-92<br>(Pb-Free) | 2000 / Ammo Box    |
| BC548CG    | TO-92<br>(Pb-Free) | 5000 Units / Bulk  |
| BC548CZL1G | TO-92<br>(Pb-Free) | 2000 / Ammo Box    |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.




**MECHANICAL CASE OUTLINE  
PACKAGE DIMENSIONS**

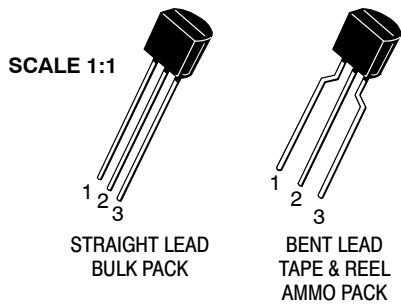


**TO-92 (TO-226)  
CASE 29-11  
ISSUE AM**

DATE 09 MAR 2007

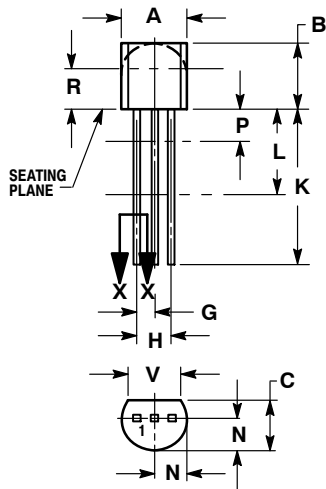


STRAIGHT LEAD  
BULK PACK




NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 0.175  | 0.205 | 4.45        | 5.20  |
| B   | 0.170  | 0.210 | 4.32        | 5.33  |
| C   | 0.125  | 0.165 | 3.18        | 4.19  |
| D   | 0.016  | 0.021 | 0.407       | 0.533 |
| G   | 0.045  | 0.055 | 1.15        | 1.39  |
| H   | 0.095  | 0.105 | 2.42        | 2.66  |
| J   | 0.015  | 0.020 | 0.39        | 0.50  |
| K   | 0.500  | ---   | 12.70       | ---   |
| L   | 0.250  | ---   | 6.35        | ---   |
| N   | 0.080  | 0.105 | 2.04        | 2.66  |
| P   | ---    | 0.100 | ---         | 2.54  |
| R   | 0.115  | ---   | 2.93        | ---   |
| V   | 0.135  | ---   | 3.43        | ---   |

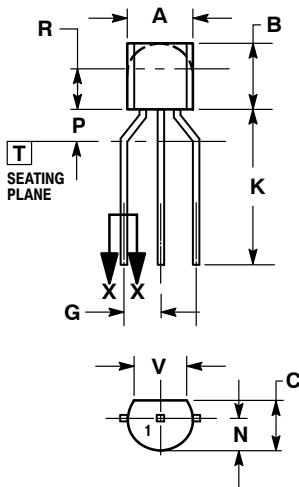

BENT LEAD  
TAPE & REEL  
AMMO PACK



NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

| DIM | MILLIMETERS |      |
|-----|-------------|------|
|     | MIN         | MAX  |
| A   | 4.45        | 5.20 |
| B   | 4.32        | 5.33 |
| C   | 3.18        | 4.19 |
| D   | 0.40        | 0.54 |
| G   | 2.40        | 2.80 |
| J   | 0.39        | 0.50 |
| K   | 12.70       | ---  |
| N   | 2.04        | 2.66 |
| P   | 1.50        | 4.00 |
| R   | 2.93        | ---  |
| V   | 3.43        | ---  |

**STYLES ON PAGE 2**

|                         |                       |   |
|-------------------------|-----------------------|---|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42022B</b>    | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>TO-92 (TO-226)</b> | <b>PAGE 1 OF 2</b>  |

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.



**TO-92 (TO-226)**  
**CASE 29-11**  
**ISSUE AM**

DATE 09 MAR 2007

- |  |   |   |  |  |
|--|---|---|--|--|
| <p>STYLE 1:<br/>                 PIN 1. EMITTER<br/>                 2. BASE<br/>                 3. COLLECTOR</p>             | <p>STYLE 2:<br/>                 PIN 1. BASE<br/>                 2. EMITTER<br/>                 3. COLLECTOR</p>                | <p>STYLE 3:<br/>                 PIN 1. ANODE<br/>                 2. ANODE<br/>                 3. CATHODE</p>               | <p>STYLE 4:<br/>                 PIN 1. CATHODE<br/>                 2. CATHODE<br/>                 3. ANODE</p>            | <p>STYLE 5:<br/>                 PIN 1. DRAIN<br/>                 2. SOURCE<br/>                 3. GATE</p>            |
| <p>STYLE 6:<br/>                 PIN 1. GATE<br/>                 2. SOURCE &amp; SUBSTRATE<br/>                 3. DRAIN</p>  | <p>STYLE 7:<br/>                 PIN 1. SOURCE<br/>                 2. DRAIN<br/>                 3. GATE</p>                     | <p>STYLE 8:<br/>                 PIN 1. DRAIN<br/>                 2. GATE<br/>                 3. SOURCE &amp; SUBSTRATE</p> | <p>STYLE 9:<br/>                 PIN 1. BASE 1<br/>                 2. EMITTER<br/>                 3. BASE 2</p>            | <p>STYLE 10:<br/>                 PIN 1. CATHODE<br/>                 2. GATE<br/>                 3. ANODE</p>          |
| <p>STYLE 11:<br/>                 PIN 1. ANODE<br/>                 2. CATHODE &amp; ANODE<br/>                 3. CATHODE</p> | <p>STYLE 12:<br/>                 PIN 1. MAIN TERMINAL 1<br/>                 2. GATE<br/>                 3. MAIN TERMINAL 2</p> | <p>STYLE 13:<br/>                 PIN 1. ANODE 1<br/>                 2. GATE<br/>                 3. CATHODE 2</p>           | <p>STYLE 14:<br/>                 PIN 1. EMITTER<br/>                 2. COLLECTOR<br/>                 3. BASE</p>          | <p>STYLE 15:<br/>                 PIN 1. ANODE 1<br/>                 2. CATHODE<br/>                 3. ANODE 2</p>     |
| <p>STYLE 16:<br/>                 PIN 1. ANODE<br/>                 2. GATE<br/>                 3. CATHODE</p>                | <p>STYLE 17:<br/>                 PIN 1. COLLECTOR<br/>                 2. BASE<br/>                 3. EMITTER</p>               | <p>STYLE 18:<br/>                 PIN 1. ANODE<br/>                 2. CATHODE<br/>                 3. NOT CONNECTED</p>      | <p>STYLE 19:<br/>                 PIN 1. GATE<br/>                 2. ANODE<br/>                 3. CATHODE</p>              | <p>STYLE 20:<br/>                 PIN 1. NOT CONNECTED<br/>                 2. CATHODE<br/>                 3. ANODE</p> |
| <p>STYLE 21:<br/>                 PIN 1. COLLECTOR<br/>                 2. EMITTER<br/>                 3. BASE</p>            | <p>STYLE 22:<br/>                 PIN 1. SOURCE<br/>                 2. GATE<br/>                 3. DRAIN</p>                    | <p>STYLE 23:<br/>                 PIN 1. GATE<br/>                 2. SOURCE<br/>                 3. DRAIN</p>                | <p>STYLE 24:<br/>                 PIN 1. EMITTER<br/>                 2. COLLECTOR/ANODE<br/>                 3. CATHODE</p> | <p>STYLE 25:<br/>                 PIN 1. MT 1<br/>                 2. GATE<br/>                 3. MT 2</p>              |
| <p>STYLE 26:<br/>                 PIN 1. V<sub>CC</sub><br/>                 2. GROUND 2<br/>                 3. OUTPUT</p>    | <p>STYLE 27:<br/>                 PIN 1. MT<br/>                 2. SUBSTRATE<br/>                 3. MT</p>                      | <p>STYLE 28:<br/>                 PIN 1. CATHODE<br/>                 2. ANODE<br/>                 3. GATE</p>               | <p>STYLE 29:<br/>                 PIN 1. NOT CONNECTED<br/>                 2. ANODE<br/>                 3. CATHODE</p>     | <p>STYLE 30:<br/>                 PIN 1. DRAIN<br/>                 2. GATE<br/>                 3. SOURCE</p>           |
| <p>STYLE 31:<br/>                 PIN 1. GATE<br/>                 2. DRAIN<br/>                 3. SOURCE</p>                 | <p>STYLE 32:<br/>                 PIN 1. BASE<br/>                 2. COLLECTOR<br/>                 3. EMITTER</p>               | <p>STYLE 33:<br/>                 PIN 1. RETURN<br/>                 2. INPUT<br/>                 3. OUTPUT</p>              | <p>STYLE 34:<br/>                 PIN 1. INPUT<br/>                 2. GROUND<br/>                 3. LOGIC</p>              | <p>STYLE 35:<br/>                 PIN 1. GATE<br/>                 2. COLLECTOR<br/>                 3. EMITTER</p>      |

|                         |                       |   |
|-------------------------|-----------------------|---|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42022B</b>    | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>TO-92 (TO-226)</b> | <b>PAGE 2 OF 2</b>  |

**onsemi** and **ONSEMI** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:**

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

**ONLINE SUPPORT:** [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.