


# 06035C471J4T2A Datasheet

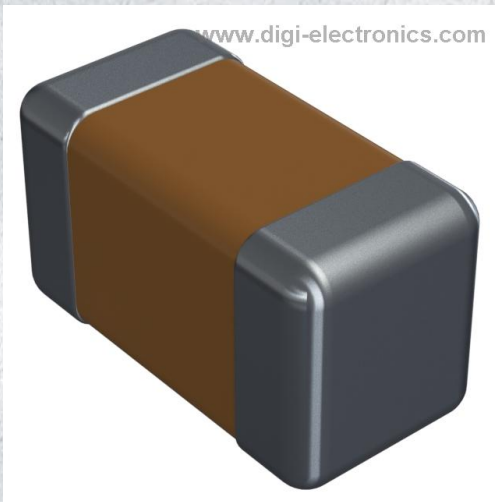

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	06035C471J4T2A-DG
Manufacturer	<a href="#">KYOCERA AVX</a>
Manufacturer Product Number	06035C471J4T2A
Description	CAP CER 470PF 50V X7R 0603
Detailed Description	470 pF ±5% 50V Ceramic Capacitor X7R 0603 (1608 Metric)

This model 06035C471J4T2A is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

06035C471J4T2A

Series:

-

Capacitance:

470 pF

Voltage - Rated:

50V

Operating Temperature:

-55°C ~ 125°C

Ratings:

AEC-Q200

Failure Rate:

-

Package / Case:

0603 (1608 Metric)

Height - Seated (Max):

-

Lead Spacing:

-

Manufacturer:

KYOCERA AVX

Product Status:

Active

Tolerance:

±5%

Temperature Coefficient:

X7R

Features:

-

Applications:

Automotive

Mounting Type:

Surface Mount, MLCC

Size / Dimension:

0.063" L x 0.032" W (1.60mm x 0.81mm)

Thickness (Max):

0.035" (0.90mm)

Lead Style:

-

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8532.24.0020

Moisture Sensitivity Level (MSL):


1 (Unlimited)

ECCN:

EAR99

# Automotive MLCC

## General Specifications



### GENERAL DESCRIPTION

KYOCERA AVX has supported the Automotive Industry requirements for Multilayer Ceramic Capacitors consistently for more than 25 years. Products have been developed and tested specifically for automotive applications and all manufacturing facilities are QS9000 and VDA 6.4 approved.

KYOCERA AVX is using AECQ200 as the qualification vehicle for this transition. A detailed qualification package is available on request and contains results on a range of part numbers.

### HOW TO ORDER

0805	5	A	104	K	4	T	2	A
<b>Size</b> 0402 0603 0805 1206 1210 1812	<b>Voltage</b> 6.3V = 6 10V = Z 16V = Y 25V = 3 35V = D 50V = 5 100V = 1 200V = 2 500V = 7	<b>Dielectric</b> NP0 = A X7R = C X8R = F	<b>Capacitance Code (In pF)</b> 2 Sig. Digits + Number of Zeros e.g. 10 F = 106	<b>Capacitance Tolerance</b> B = $\pm 0.1\text{pF}$ (<10pF)* C = $\pm 0.25\text{pF}$ (<10pF)* D = $\pm 0.5\text{pF}$ (<10pF)* F = $\pm 1\%$ * G = $\pm 2\%$ * J = $\pm 5\%$ (<=1 $\mu\text{F}$ ) K = $\pm 10\%$ M = $\pm 20\%$  *NPO only	<b>Failure Rate</b>  4=Automotive	<b>Terminations</b> T = Plated Ni and Sn Z = FLEXITERM <sup>®**</sup> U = Conductive Epo  **X7R X8R only	<b>Packaging</b> 2 = 7" Reel 4 = 13" Reel	<b>Special Code</b> A = Std.Product

Contact factory for availability of Tolerance Options for Specific Part Numbers.

NOTE: Contact factory for non-specified capacitance values  
0402 case size available in T termination only.

### COMMERCIAL VS AUTOMOTIVE MLCC PROCESS COMPARISON

	Commercial	Automotive
<b>Administrative</b>	Standard Part Numbers. No restriction on who purchases these parts.	Specific Automotive Part Number. Used to control supply of product to Automotive customers.
<b>Lot Qualification (Destructive Physical Analysis - DPA)</b>	As per EIA RS469	Increased sample plan stricter criteria.
<b>Visual/Cosmetic Quality</b>	Standard process and inspection	100% inspection
<b>Application Robustness</b>	Standard sampling for accelerated wave solder on X7R dielectrics	Increased sampling for accelerated wave solder on X7R and NP0 followed by lot by lot reliability testing.

All Tests have Accept/Reject Criteria 0/1


## Automotive MLCC

### NP0/X7R Dielectric

#### FLEXITERM FEATURES

a) Bend Test

The capacitor is soldered to the PC Board as shown:

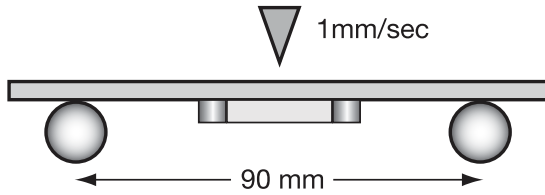

Typical bend test results are shown below:

Style	Conventional	Soft Term
0603	>2mm	>5
0805	>2mm	>5
1206	>2mm	>5

a) Temperature Cycle testing

FLEXITERM® has the ability to withstand at least 1000 cycles between -55°C and +125°C



# Automotive MLCC-NP0

## Capacitance Range

Case Size		0402			0603				0805						1206						1210											
Length (L)	mm (in.)	1.00 ± 0.10 (0.040 ± 0.004)			1.60 ± 0.15 (0.063 ± 0.006)				2.01 ± 0.20 (0.079 ± 0.008)						3.20 ± 0.20 (0.126 ± 0.008)						3.20 ± 0.20 (0.126 ± 0.008)											
Width (W)	mm (in.)	0.50 ± 0.10 (0.020 ± 0.004)			0.81 ± 0.15 (0.032 ± 0.006)				1.25 ± 0.20 (0.049 ± 0.008)						1.60 ± 0.20 (0.063 ± 0.008)						2.50 ± 0.20 (0.098 ± 0.008)											
Terminal (t)	mm (in.)	0.25 ± 0.15 (0.010 ± 0.006)			0.35 ± 0.15 (0.014 ± 0.006)				0.50 ± 0.25 (0.020 ± 0.010)						0.50 ± 0.25 (0.020 ± 0.010)						0.50 ± 0.25 (0.020 ± 0.010)											
CAP	CAP Code	25	50	100	25	50	100	200	250	25	50	100	200	250	500	630	25	50	100	200	250	500	630	1000	50	100	200	250	500	630	1000	
0.5	0R5	C	C	C	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
1	1R0	C	C	C	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
5	5R0	C	C	C	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
10	100	C	C	C	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
12	120	C	C	C	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
15	150	C	C	C	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
18	180	C	C	C	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
22	220	C	C	C	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
27	270	C	C	C	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
33	330	C	C	C	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
39	390	C	C	C	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
47	470	C	C	C	G	G	G	G	G	J	J	J	J	J	J	J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
56	560	C	C	C	G	G	G	G	G	J	J	J	J	J	N		J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
68	680	C	C	C	G	G	G	G	G	J	J	J	J	N		J	J	J	J	J	J	J	Q	Q	J	J	J	J	J	J	J	
82	820	C	C	C	G	G	G	G	G	J	J	J	J	N		J	J	J	J	J	J	J	Q	Q	N	N	N	N	N	N	N	
100	101	C	C	C	G	G	G	G	G	J	J	J	J	N		J	J	J	J	J	J	J	Q	Q	N	N	N	N	N	N	N	
120	121				G	G	G			J	J	J	J	N		J	J	J	J	J	J	J	Q	Q	N	N	N	N	P	P	P	X
150	151				G	G	G			J	J	J	J	N		J	J	J	J	J	J	J	Q	Q	N	N	N	N	P	P	P	X
180	181				G	G	G			J	J	J	J	N		J	J	J	J	J	J	J	Q	Q	N	N	N	N	P	P	P	X
220	221				G	G	G			J	J	J	J	N		J	J	J	J	J	J	J	Q	Q	N	N	N	N	P	P	P	X
270	271				G	G	G			J	J	J	J	N		J	J	J	J	J	J	J	Q	Q	N	N	N	N	P	P	P	X
330	331				G	G	G			J	J	J	J	N		J	J	J	J	J	J	J	Q	Q	N	N	N	N	P	P	P	X
390	391				G	G	G			J	J	J	J	N		J	J	J	J	J	J	J	Q	Q	N	N	N	N	P	P	P	X
430	431				G	G				J	J	J	J			J	J	J	J	J	J	J	Q	Q	N	N	N	N	P	P	P	X
470	471				G	G				J	J	J	J			J	J	J	J	J	J	J	Q	Q	N	N	N	N	P	P	P	X
560	561				G	G				J	J	J	J			J	J	J	J	M	Q	Q	Q	Q	N	N	N	N	P	P	P	
680	681				G	G				J	J	J	J			J	J	J	J	M	Q	Q	Q	Q	N	N	N	N	P	P	P	
1,000	102				G	G				J	J	J	J			J	J	J	J	M	Q	Q	Q	Q	N	N	N	N	P	P	P	X
1,200	122				G	G				J	J	J	J			N	N	N	N						N	N	N	N	P	P	P	
1,500	152				G	G				J	J	J	J			N	N	N	N						N	N	N	N	P	P	P	
2,200	222				G					J	J	J	J			J	J	J	J	J	J	J	J	J	N	N	N	N	P	K	K	
2,700	272				G					J	J	J	J			J	J	J	J	J	J	J	J	J	N	N	N	N	P	K	K	
3,300	332				G											M	M	M	M	M	M	M	M						K	K		
3,900	392				G											M	M	M	M	M	M	M	M						M	M		
4,700	472				G											P	P	P	P	P	P	P	P					M	M			
5,600	562				G																							M	M			
6,800	682				G																							N	N			
8,200	822				G																							P	P			
10,000	103				G																									X	X	X
12,000	123																													X		
15,000	153																													X		
18,000	183																													X		
22,000	223																													X		
27,000	273																													X		
33,000	333																													X		
39,000	393																															
47,000	473																															
56,000	563																															
68,000	683																															
82,000	823																															
100,000	104																															

Letter	A	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
	PAPER					EMBOSSED							



# Automotive MLCC - X8R

## Capacitance Range

SIZE			0603			0805			1206	
Soldering			Reflow/Wave			Reflow/Wave			Reflow/Wave	
WVDC	WVDC		25V	50V	100V	25V	50V	100V	25V	50V
472	pF	4700	G	G	G	J	J	J	J	J
562		5600	G	G	G	J	J	J	J	J
682		6800	G	G	G	J	J	J	J	J
822		8200	G	G	G	J	J	J	J	J
103	uF	0.01	G	G	G	J	J	J	J	J
123		0.012	G	G		J	J	N	J	J
153		0.015	G	G		J	J	N	J	J
183		0.018	G	G		J	J	N	J	J
223		0.022	G	G		J	J	N	J	J
273		0.027	G	G		J	J		J	J
333		0.033	G	G		J	J		J	J
393		0.039	G	G		J	J		J	J
473		0.047	G	G		J	J		J	J
563		0.056	G			N	N		M	M
683		0.068	G			N	N		M	M
823		0.082				N	N		M	M
104		0.1				N	N		M	M
124		0.12				N	N		M	M
154		0.15				N	N		M	M
184		0.18				N			M	M
224		0.22				N			M	M
274		0.27							M	M
334		0.33							M	M
394		0.39							M	M
474		0.47							M	Q
684		0.68							Q	Q
824		0.82							Q	Q
105		1							Q	Q
WVDC	WVDC		25V	50V	100V	25V	50V	100V	25V	50V
SIZE			0603			0805			1206	

Letter	A	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
	PAPER					EMBOSSED							

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.