


# 1812SC682MAT1A\SB Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)

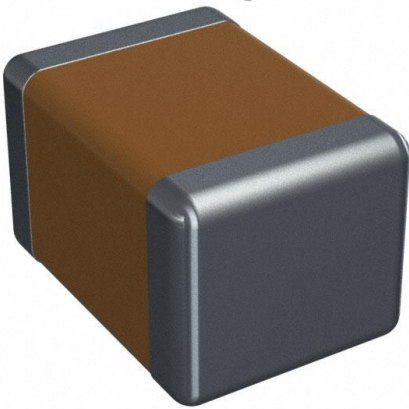

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	1812SC682MAT1A\SB-DG
Manufacturer	<a href="#">KYOCERA AVX</a>
Manufacturer Product Number	1812SC682MAT1A\SB
Description	CAP CER 6800PF 1.5KV X7R 1812
Detailed Description	6800 pF ±20% 1500V (1.5kV) Ceramic Capacitor X7R 1812 (4532 Metric)

This model 1812SC682MAT1A\SB is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

1812SC682MAT1A\SB

Series:

-

Capacitance:

6800 pF

Voltage - Rated:

1500V (1.5kV)

Operating Temperature:

-55°C ~ 125°C

Ratings:

-

Failure Rate:

-

Package / Case:

1812 (4532 Metric)

Height - Seated (Max):

-

Lead Spacing:

-

Manufacturer:

KYOCERA AVX

Product Status:

Active

Tolerance:

±20%

Temperature Coefficient:

X7R

Features:

High Voltage

Applications:

General Purpose

Mounting Type:

Surface Mount, MLCC

Size / Dimension:

0.181" L x 0.126" W (4.60mm x 3.20mm)

Thickness (Max):

0.110" (2.80mm)

Lead Style:

-

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8532.24.0020

Moisture Sensitivity Level (MSL):


1 (Unlimited)

ECCN:

EAR99

# High Voltage MLC Chips

## For 600V to 5000V Applications

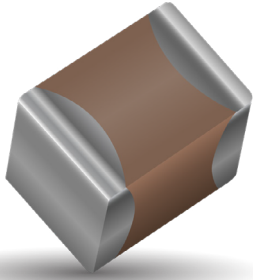

High value, low leakage and small size are difficult parameters to obtain in capacitors for high voltage systems. KYOCERA AVX special high voltage MLC chip capacitors meet these performance characteristics and are designed for applications such as snubbers in high frequency power converters, resonators in SMPS, and high voltage coupling/dc blocking. These high voltage chip designs exhibit low ESRs at high frequencies.

Larger physical sizes than normally encountered chips are used to make high voltage MLC chip products. Special precautions must be taken in applying these chips in surface mount assemblies. The temperature gradient during heating or cooling cycles should not exceed 4°C per second. The preheat temperature must be within 50°C of the peak temperature reached by the ceramic bodies through the soldering process. Chip sizes 1210 and larger should be reflow soldered only. Capacitors may require protective surface coating to prevent external arcing.

For 1825, 2225 and 3640 sizes, KYOCERA AVX offers leaded version in either thru-hole or SMT configurations (for details see section on high voltage leaded MLC chips)

### NEW 630V RANGE

#### HOW TO ORDER


1808	A	A	271	M	A	T	2	A
<b>Style</b>	<b>Voltage</b>	<b>Temperature Coefficient</b>	<b>Capacitance Code</b>	<b>Capacitance Tolerance</b>	<b>Test Level</b>	<b>Termination*</b>	<b>Packaging</b>	<b>Special Code</b>
0805 1206 1210 1808 1812 1825 2220 2225 3640 ***	C = 600V/630V A = 1000V S = 1500V G = 2000V W = 2500V H = 3000V J = 4000V K = 5000V	A = NPO (C0G) C = X7R	(2 significant digits + no. of zeros) Examples: 10 pF = 100 100 pF = 101 1,000 pF = 102 22,000 pF = 223 220,000 pF = 224 1 μF = 105	C0G: J = ±5% K = ±10% M = ±20% X7R: K = ±10% M = ±20% Z = +80%, -20%	A = Standard	T = Plated Ni and Sn (RoHS Compliant)	2 = 7" Reel** 4 = 13" Reel** 6 = Tray (3640 Style)	A = Standard

#### Notes:

- Capacitors with X7R dielectrics are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations. Contact factory for availability of Termination and Tolerance options for Specific Part Numbers.
- \*Terminations with 5% minimum lead (Pb) is available, see pages 100 and 101 for LD style. Leaded terminations are available, see pages 102-106.

\*\*The 3640 Style is not available on Reels.

\*\*\* KYOCERA AVX offers nonstandard chip sizes. Contact factory for details.

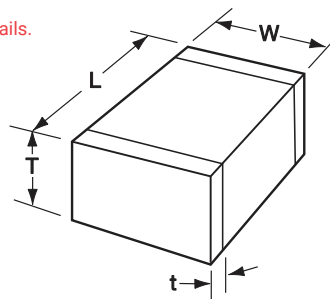

#### DIMENSIONS: millimeters (inches)

SIZE	0805	1206	1210*	1808*	1812*	1825*	2220*	2225*	3640*
(L) Length	2.10 ± 0.20 (0.083 ± 0.008)	3.30 ± 0.30 (0.130 ± 0.012)	3.30 ± 0.40 (0.130 ± 0.016)	4.60 ± 0.50 (0.181 ± 0.020)	4.60 ± 0.50 (0.181 ± 0.020)	4.60 ± 0.50 (0.181 ± 0.020)	5.70 ± 0.50 (0.224 ± 0.020)	5.70 ± 0.50 (0.224 ± 0.020)	9.14 ± 0.25 (0.360 ± 0.010)
(W) Width	1.25 ± 0.20 (0.049 ± 0.008)	1.60 ± 0.20 (0.063 ± 0.008)	2.50 ± 0.30 (0.098 ± 0.012)	2.00 ± 0.20 (0.079 ± 0.008)	3.20 ± 0.30 (0.126 ± 0.012)	6.30 ± 0.40 (0.248 ± 0.016)	5.00 ± 0.40 (0.197 ± 0.016)	6.30 ± 0.40 (0.248 ± 0.016)	10.2 ± 0.25 (0.400 ± 0.010)
(t) terminal min. max.	0.50 ± 0.20 (0.020 ± 0.008)	0.60 ± 0.20 (0.024 ± 0.008)	0.75 ± 0.35 (0.030 ± 0.014)	0.75 ± 0.35 (0.030 ± 0.014)	0.75 ± 0.35 (0.030 ± 0.014)	0.75 ± 0.35 (0.030 ± 0.014)	0.85 ± 0.35 (0.033 ± 0.014)	0.85 ± 0.35 (0.033 ± 0.014)	0.76 (0.030) 1.52 (0.060)

\*Reflow Soldering Only



# High Voltage MLC Chips

## For 600V to 5000V Applications

### NPO (C0G) DIELECTRIC – PERFORMANCE CHARACTERISTICS

Capacitance Range	10 pF to 0.100 μF (25°C, 1.0 ±0.2 Vrms at 1kHz, for ≤ 1000 pF use 1 MHz)
Capacitance Tolerances	±5%, ±10%, ±20%
Dissipation Factor	0.1% max. (+25°C, 1.0 ±0.2 Vrms, 1kHz, for ≤ 1000 pF use 1 MHz)
Operating Temperature Range	-55°C to +125°C
Temperature Characteristic	0 ±30 ppm/°C (0 VDC)
Voltage Ratings	600, 630, 1000, 1500, 2000, 2500, 3000, 4000 & 5000 VDC (+125°C)
Insulation Resistance (+25°C, at 500 VDC)	100K MΩ min. or 1000 MΩ - μF min., whichever is less
Insulation Resistance (+125°C, at 500 VDC)	10K MΩ min. or 100 MΩ - μF min., whichever is less
Dielectric Strength	Minimum 120% rated voltage for 5 seconds at 50 mA max. current

### NPO (C0G) CAPACITANCE RANGE – PREFERRED SIZES ARE SHADED

Case Size Soldering	0805						1206						1210						1808						1812									
	Reflow/Wave						Reflow/Wave						Reflow Only						Reflow Only						Reflow Only									
(L) Length	2.10 ± 0.20 (0.085 ± 0.008)						3.30 ± 0.30 (0.130 ± 0.012)						3.30 ± 0.40 (0.130 ± 0.016)						4.60 ± 0.50 (0.181 ± 0.020)						4.60 ± 0.50 (0.181 ± 0.020)									
(W) Width	1.25 ± 0.20 (0.049 ± 0.008)						1.60 ± 0.30/-0.10 (0.063 ± 0.012/-0.004)						2.50 ± 0.30 (0.098 ± 0.012)						2.00 ± 0.20 (0.079 ± 0.008)						3.20 ± 0.30 (0.126 ± 0.012)									
(t) Terminal	0.50 ± 0.20 (0.020 ± 0.008)						0.60 ± 0.20 (0.04 ± 0.008)						0.75 ± 0.35 (0.030 ± 0.014)						0.75 ± 0.35 (0.030 ± 0.014)						0.75 ± 0.35 (0.030 ± 0.014)									
Voltage (V)	600	630	1000	600	630	1000	600	630	1000	1500	2000	600	630	1000	1500	2000	3000	600	630	1000	1500	2000	2500	3000	4000	600	630	1000	1500	2000	2500	3000	4000	
Cap (pF)	.5	0R5		A	C																													
	1.0	1R0		A	C																													
	1.2	1R2		A	C																													
	1.5	1R5	A	A	C	X	X	X	X	X	X																							
	1.8	1R8	A	A	C	X	X	X	X	X	X																							
	2.2	2R2	A	A	C	X	X	X	X	X	X																							
	2.7	2R7	A	A	C	X	X	X	X	X	X																							
	3.3	3R3	A	A	C	X	X	X	X	X	X																							
	3.9	3R9	A	A	C	X	X	X	X	X	X																							
	4.7	4R7	A	A	C	X	X	X	X	X	X																							
	5.6	5R6	A	A	C	X	X	X	X	X	X																							
	6.8	6R8	A	A	C	X	X	X	X	X	X																							
	8.2	8R2	A	A	C	X	X	X	X	X	X																							
	10	100	A	A	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	E
	12	120	A	A	C	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	E
	15	150	A	A	C	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	E
	18	180	A	A	C	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	E
	22	220	A	A	C	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	E
	27	270	A	A	C	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	E
	33	330	A	A	C	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	E
	39	390	A	A	C	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	E
	47	470	A	A	C	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	E
	56	560	A	A	C	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
	68	680	A	A	C	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
	82	820	X	X	X	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
	100	101	X	X	X	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F
	120	121	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	F	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	G
	150	151	C	C	C	C	C	C	C	E	E	C	C	C	E	E	F	C	C	C	F	F	F	F	F	F	F	C	C	C	C	F	C	G
	180	181	C	C	C	C	C	C	E	E	E	C	C	E	E	F	F	C	C	C	F	F	F	F	F	F	C	C	C	C	F	F	F	
	220	221	C	C	C	C	C	C	E	E	E	C	C	E	E	F	F	C	C	C	F	F	F	F	F	F	C	C	C	C	F	F	F	
	270	271	C	C	C	C	C	C	E	E	E	C	C	E	E	G	G	C	F	C	F	F	F	F	F	F	C	C	C	C	F	F	F	
	330	331	C	C	C	C	C	C	E	E	E	C	C	E	E	E	E	C	F	F	F	F	F	F	F	F	C	C	C	F	F	F	F	
	390	391	C	C	C	C	C	C	E	E	E	C	C	E	E	E	E	C	F	F	F	F	F	F	F	F	C	C	C	F	F	F	F	
	470	471	C	C	C	C	C	C	E	E	E	C	C	E	E	E	E	C	F	F	F	F	F	F	F	F	C	C	C	F	F	F	F	
	560	561	C	C	C	C	C	E	E	E	C	C	E	E	E	E	E	C	F	F	F	F	F	F	F	F	C	C	F	F	F	F	F	
	680	681	C	C	C	C	C	E	E	E	C	C	E	E	E	E	E	C	F	F	F	F	F	F	F	F	C	C	F	F	F	G	G	
	750	751	C	C	C	C	E	E	E	E	C	C	E	E	E	E	E	C	F	F	F	F	F	F	F	F	C	C	F	F	F	G	G	
	820	821	C	C	C	E	E	E	E	E	C	C	E	E	E	E	E	C	F	F	E	E	E	E	E	E	C	C	F	F	F	G	G	
	1000	102	C	E	E	E	E	E	E	E	C	C	E	F	F	F	F	C	F	F	E	F	F	F	F	F	C	C	F	F	F	G	G	
	1200	122	C	E	E	E	E	E	E	E	C	C	E	F	F	F	F	C	F	F	E	F	F	F	F	F	C	C	F	E	E	E		
	1500	152	C	E	E	E	E	E	E	E	C	C	E	F	G	G	G	E	F	F	F	F	F	F	F	F	C	C	F	F	F	F		
	1800	182	C	E	E	E	E	E	E	E	C	C	E	G	G	G	G	E	F	F	F	F	F	F	F	F	C	C	F	G	F	F		
	2200	222	C	E	E	E	E	E	E	E	C	C	E	G	G	G	G	E	F	F	F	F	F	F	F	F	C	C	E	G	G	G		
	2700	272	C	E	E	E	E	E	E	E	C	C	E	G	G	G	G	E	F	F	F	F	F	F	F	F	C	C	E	G	G	G		
	3300	332	C	E	E	E	E	E	E	E	C	C	E	G	G	G	G	E	F	F	F	F	F	F	F	F	C	C	F	G	G	G		
	3900	392	C	E	E	E	E	E	E	E	C	C	E	G	G	G	G	E	F	F	F	F	F	F	F	F	C	C	F	G	G	G		
	4700	472	C	E	E	E	E	E	E	E	C	C	E	G	G	G	G	E	F	F	F	F	F	F	F	F	C	C	G	G	G	G		
	5600	562	C	E	E	E	E	E	E	E	C	C	E	G	G	G	G	E	F	F	F	F	F	F	F	F	C	C	G	G	G	G		
	6800	682	C	E	E	E	E	E	E	E	C	C	E	G	G	G	G	E	F	F	F	F	F	F	F	F	C	C	G	G	G	G		
	8200	822	C	E	E	E	E	E	E	E	C	C	E	G	G	G	G	E	F	F	F	F	F	F	F	F	C	C	G	G	G	G		
	Cap (μF)	0.010	103																															
		0.012	123																															
		0.015	153																															
		0.018	183																															
		0.022	223																															
		0.027	273																															
		0.033	333																															
		0.047	473																															
		0.056	563																															
		0.068	683																															
		0.100	104																															
	Voltage (V)	600	630																															





# High Voltage MLC Chips

## For 600V to 5000V Applications

### X7R Dielectric Performance Characteristics

Capacitance Range	10 pF to 0.82 μF (25°C, 1.0 ±0.2 Vrms at 1kHz)
Capacitance Tolerances	±10%; ±20%; +80%, -20%
Dissipation Factor	2.5% max. (+25°C, 1.0 ±0.2 Vrms, 1kHz)
Operating Temperature Range	-55°C to +125°C
Temperature Characteristic	±15% (0 VDC)
Voltage Ratings	600, 630, 1000, 1500, 2000, 2500, 3000, 4000 & 5000 VDC (+125°C)
Insulation Resistance (+25°C, at 500 VDC)	100K MΩ min. or 1000 MΩ - μF min., whichever is less
Insulation Resistance (+125°C, at 500 VDC)	10K MΩ min. or 100 MΩ - μF min., whichever is less
Dielectric Strength	Minimum 120% rated voltage for 5 seconds at 50 mA max. current

### X7R CAPACITANCE RANGE – PREFERRED SIZES ARE SHADED

Case Size Soldering	0805			1206					1210					1808								1812							
	Reflow/Wave			Reflow/Wave					Reflow Only					Reflow Only								Reflow Only							
(L) Length mm (in.)	2.10 ± 0.20 (0.085 ± 0.008)			3.30 ± 0.30 (0.130 ± 0.012)					3.30 ± 0.40 (0.130 ± 0.016)					4.60 ± 0.50 (0.181 ± 0.020)								4.60 ± 0.50 (0.181 ± 0.020)							
W) Width mm (in.)	1.25 ± 0.20 (0.049 ± 0.008)			1.60 +0.30/-0.10 (0.063 +0.012/-0.004)					2.50 ± 0.30 (0.098 ± 0.012)					2.00 ± 0.20 (0.079 ± 0.008)								3.20 ± 0.30 (0.126 ± 0.012)							
(t) Terminal mm max	0.50 ± 0.20 (0.020 ± 0.008)			0.60 ± 0.20 (0.024 ± 0.008)					0.75 ± 0.35 (0.030 ± 0.014)					0.75 ± 0.35 (0.030 ± 0.014)								0.75 ± 0.35 (0.030 ± 0.014)							
Voltage (V)	600	630	1000	600	630	1000	1500	2000	600	630	1000	1500	2000	600	630	1000	1500	2000	2500	3000	4000	600	630	1000	1500	2000	2500	3000	4000
Cap (pF) 100 101	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
120 121	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
150 151	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
180 181	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
220 221	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
270 271	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
330 331	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
390 391	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
470 471	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
560 561	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
680 681	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
750 751	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
820 821	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
1000 102	X	X	X	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
1200 122	X	X	X	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
1500 152	X	X	X	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
1800 182	X	X	C	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
2200 222	X	X	X	C	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
2700 272	C	C		C	C	E	E		E	E	E	F	E	E	E	F	F	F			F	F	F	F	F	G	G		
3300 332	C	C		C	C	E			E	E	E	F	E	E	E	F	F	F			F	F	F	F	F	G	G		
3900 392	C	C		C	C	E			E	E	E	F		E	E	E	F				F	F	F	F	F	G	G		
4700 472	C	C		C	C	E			E	E	E	F		E	E	E	F				F	F	F	F	F	G	G		
5600 562	C	C		C	C	E			E	E	E	F		E	E	E	F				F	F	F	F	F	G	G		
6800 682	C	C		C	C	E			E	E	E			E	E	E	F				F	F	F	G	G				
8200 822	C	C		C	C	E			E	E	E			E	E	E					F	F	F	G	G				
Cap (μF) 0.010 103	C	C		C	C	E			E	E	E			E	E	E					F	F	F	G					
0.015 153	C	C		E	E	E			E	E	E			F	F	F					F	F	F	G					
0.018 183	C	C		E	E				E	E	E			F	F	F					F	F	G						
0.022 223	C	C		E	E				E	E	F			F	F	F					F	F	G						
0.027 273				E	E				E	E				F	F						F	F	G						
0.033 333				E	E				E	E				F	F						F	F	G						
0.039 393									E	E				F	F						F	F	G						
0.047 473									E	E				F	F						F	F	G						
0.056 563									F	F				F	F						F	F							
0.068 683									F	F				F	F						F	F							
0.082 823									F	F				F	F						F	F							
0.100 104									F	F				F	F						F	F							
0.150 154																					G	G							
0.220 224																					G	G							
0.270 274																													
0.330 334																													
0.390 394																													
0.470 474																													
0.560 564																													
0.680 684																													
0.820 824																													
1.000 105																													
Voltage (V)	600	630	1000	600	630	1000	1500	2000	600	630	1000	1500	2000	600	630	1000	1500	2000	2500	3000	4000	600	630	1000	1500	2000	2500	3000	4000
Case Size	0805			1206					1210					1808								1812							

Letter	A	C	E	F	G	X	7
Max. Thickness	0.81 (0.032)	1.45 (0.057)	1.80 (0.071)	2.20 (0.087)	2.80 (0.110)	0.94 (0.037)	3.30 (0.130)

NOTE: Contact factory for non-specified capacitance values



## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.