

# KGQ05FCG1H240FH Datasheet

www.digi-electronics.com



https://www.DiGi-Electronics.com

DiGi Electronics Part Number	KGQ05FCG1H240FH-DG
Manufacturer	<a href="#">KYOCERA AVX</a>
Manufacturer Product Number	KGQ05FCG1H240FH
Description	CAP CER 24PF 50V NP0 0402
Detailed Description	24 pF ±1% 50V Ceramic Capacitor COG, NP0 0402 (1005 Metric)

This model KGQ05FCG1H240FH is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

KGQ05FCG1H240FH

Series:

KGQ

Capacitance:

24 pF

Voltage - Rated:

50V

Operating Temperature:

-55°C ~ 125°C

Ratings:

-

Mounting Type:

Surface Mount, MLCC

Size / Dimension:

0.039" L x 0.020" W (1.00mm x 0.50mm)

Thickness (Max):

0.022" (0.55mm)

Lead Style:

-

Manufacturer:

KYOCERA AVX

Product Status:

Active

Tolerance:

±1%

Temperature Coefficient:

COG, NPO

Features:

Ultra Low ESR

Applications:

RF, Microwave, High Frequency

Package / Case:

0402 (1005 Metric)

Height - Seated (Max):

-

Lead Spacing:

-

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8532.24.0020

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

# RF/Microwave Capacitors

## RF/Microwave C0G (NP0) Capacitors


### Ultra Low ESR "U" Series, C0G (NP0) Capacitors (RoHS), KGQ Series



#### GENERAL INFORMATION

"U" Series capacitors are C0G (NP0) chip capacitors specially designed for "Ultra" low ESR for applications in the communications market. Max ESR and effective capacitance are met on each value producing lot to lot uniformity. Sizes available are EIA chip sizes 0603, 0805, and 1210.

#### DIMENSIONS: inches (millimeters)

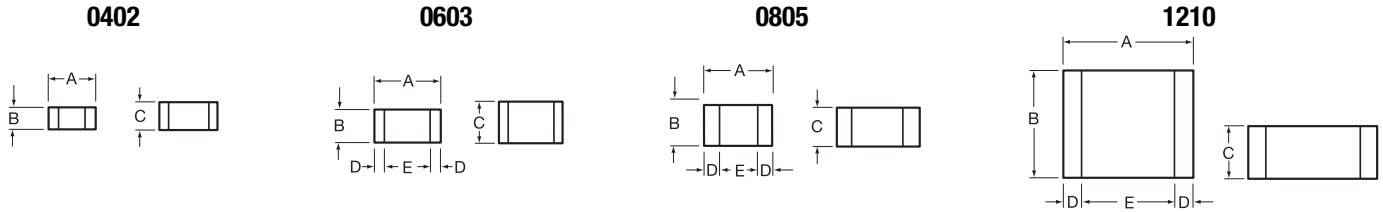

Size	A	B	C	D	E
0402	0.039±0.004 (1.00±0.1)	0.020±0.004 (0.50±0.1)	0.024 (0.6) max	0.010 ± 0.006 (0.25 ± 0.15)	0.014 (0.36) min
0603	0.060±0.010 (1.52±0.25)	0.030±0.010 (0.76±0.25)	0.036 (0.91) max	0.010 ± 0.005 (0.25 ± 0.13)	0.030 (0.76) min
0805	0.079±0.008 (2.01±0.2)	0.049±0.008 (1.25±0.2)	0.045 (1.15mm) max	0.020 ± 0.010 (0.51 ± 0.254)	0.020 (0.51) min
1210	0.126±0.008 (3.2±0.2)	0.098±0.008 (2.49±0.2)	0.055 (1.40mm) max	0.025 ± 0.015 (0.635 ± 0.381)	0.040 (1.02) min

#### HOW TO ORDER

<p><b>KGQ</b></p> <p>Series General Purpose Tin/ Nickel Finish</p>	<p><b>05</b></p> <p>Size 05 = 0402 15 = 0603 21 = 0805 32 = 1210</p>	<p><b>F</b></p> <p>Thickness See Cap Chart</p>	<p><b>CG</b></p> <p>Dielectric C0G = CG</p>	<p><b>1H</b></p> <p>Voltage 1H = 50V 2A = 100V 2D = 200V</p>	<p><b>9R1</b></p> <p>Capacitance Code Code (in pF) 2 Significant Digits +Number of zeros eg. 10µF = 106 10nF = 103 47pF = 470</p>	<p><b>B</b></p> <p>Capacitance Tolerance B = ± 0.1pF(&lt;10pF) C = ± 0.25pF(&lt;10pF) D = ± 0.5pF(&lt;10pF) G = ±2% F = ±1% J = ±5% K = ±10% M = ±20%</p>	<p><b>N</b></p> <p>Packaging See Table Below</p>
--	--	--	---	--	---	---	--



#### PACKAGING CODES

Code	EIA (inch)	IEC(mm)	7" Paper	7" Embossed	13" Paper	13" Embossed
05	0402	1005	H		N	
15	0603	1608	T		M	
21	0805	2012	T		M	
32	1210	3225	T		M	

#### ELECTRICAL CHARACTERISTICS

##### Capacitance Values and Tolerances:

- Size 0402 - 0.2 pF to 22 pF @ 1 MHz
- Size 0603 - 1.0 pF to 100 pF @ 1 MHz
- Size 0805 - 1.6 pF to 160 pF @ 1 MHz
- Size 1210 - 2.4 pF to 1000 pF @ 1 MHz

##### Temperature Coefficient of Capacitance (TC):

0±30 ppm/°C (-55° to +125°C)

##### Insulation Resistance (IR):

- 10<sup>12</sup> Ω min. @ 25°C and rated WVDC
- 10<sup>11</sup> Ω min. @ 125°C and rated WVDC

##### Working Voltage (WVDC):

- |      |                     |
|------|---------------------|
| Size | Working Voltage     |
| 0402 | - 50, 25 WVDC       |
| 0603 | - 200, 100, 50 WVDC |
| 0805 | - 200, 100 WVDC     |
| 1210 | - 200, 100 WVDC     |

##### Dielectric Working Voltage (DWV):

250% of rated WVDC

##### Equivalent Series Resistance Typical (ESR):

- 0402 - See Performance Curve, page 300
- 0603 - See Performance Curve, page 300
- 0805 - See Performance Curve, page 300
- 1210 - See Performance Curve, page 300

##### Marking

Laser marking EIA J marking standard (except 0603) (capacitance code and tolerance upon request).

##### Military Specifications

Meets or exceeds the requirements of MIL-C-55681.

# RF/Microwave Capacitors

## RF/Microwave C0G (NP0) Capacitors

### Ultra Low ESR "U" Series, C0G (NP0) Capacitors (RoHS), KGQ Series



#### CAPACITANCE RANGE

SIZE		0402			0603			0805			1210		
Soldering		All Paper			All Paper			All Embossed			All Embossed		
(L) Length	mm	1.00±0.10			1.60±0.15			2.01±0.20			3.20±0.20		
	(in.)	(0.040±0.004)			(0.063±0.006)			(0.079±0.008)			(0.126±0.008)		
(W) Width	mm	0.50±0.10			0.81±0.15			1.25±0.20			2.50±0.20		
	(in.)	(0.020±0.004)			(0.032±0.006)			(0.049±0.008)			(0.098±0.008)		
(t) Terminal	mm	0.25±0.15			0.35±0.15			0.50±0.25			0.50±0.25		
	(in.)	(0.010±0.006)			(0.014±0.006)			(0.020±0.010)			(0.020±0.010)		
WVDC		50	50	100	200	100	200	100	200	100	200		
Cap (pF)	0.2	F	A	A	A	H	H	D	D	D	D		
	0.3	F	A	A	A	H	H	D	D	D	D		
	0.4	F	A	A	A	H	H	D	D	D	D		
	0.5	F	A	A	A	H	H	D	D	D	D		
	0.6	F	A	A	A	H	H	D	D	D	D		
	0.7	F	A	A	A	H	H	D	D	D	D		
	0.8	F	A	A	A	H	H	D	D	D	D		
	0.9	F	A	A	A	H	H	D	D	D	D		
	1.0	F	A	A	A	H	H	D	D	D	D		
	1.1	F	A	A	A	H	H	D	D	D	D		
	1.2	F	A	A	A	H	H	D	D	D	D		
	1.3	F	A	A	A	H	H	D	D	D	D		
	1.4	F	A	A	A	H	H	D	D	D	D		
	1.5	F	A	A	A	H	H	D	D	D	D		
	1.6	F	A	A	A	H	H	D	D	D	D		
	1.7	F	A	A	A	H	H	D	D	D	D		
	1.8	F	A	A	A	H	H	D	D	D	D		
	1.9	F	A	A	A	H	H	D	D	D	D		
	2.0	F	A	A	A	H	H	D	D	D	D		
	2.1	F	A	A	A	H	H	D	D	D	D		
	2.2	F	A	A	A	H	H	D	D	D	D		
	2.4	F	A	A	A	H	H	D	D	D	D		
	2.7	F	A	A	A	H	H	D	D	D	D		
	3.0	F	A	A	A	H	H	D	D	D	D		
	3.3	F	A	A	A	H	H	D	D	D	D		
	3.6	F	A	A	A	H	H	D	D	D	D		
	3.9	F	A	A	A	H	H	D	D	D	D		
	4.3	F	A	A	A	H	H	D	D	D	D		
	4.7	F	A	A	A	H	H	D	D	D	D		
	5.1	F	A	A	A	H	H	D	D	D	D		
	5.6	F	A	A	A	H	H	D	D	D	D		
	6.2	F	A	A	A	H	H	D	D	D	D		
	6.8	F	A	A	A	H	H	D	D	D	D		
	7.5	F	A	A	A	H	H	D	D	D	D		
	8.2	F	A	A	A	H	H	D	D	D	D		
	9.1	F	A	A	A	H	H	D	D	D	D		
	10	F	A	A	A	H	H	D	D	D	D		
	11	F	A	A	A	H	H	D	D	D	D		
	12	F	A	A	A	H	H	D	D	D	D		
	18	F	A	A	A	H	H	D	D	D	D		
	20	F	A	A	A	H	H	D	D	D	D		
	22	F	A	A	A	H	H	D	D	D	D		
WVDC		50	50	100	200	100	200	100	200	100	200		
SIZE		0402			0603			0805			1210		

SIZE		0402			0603			0805			1210		
Soldering		All Paper			All Paper			All Embossed			All Embossed		
(L) Length	mm	1.00±0.10			1.60±0.15			2.01±0.20			3.20±0.20		
	(in.)	(0.040±0.004)			(0.063±0.006)			(0.079±0.008)			(0.126±0.008)		
(W) Width	mm	0.50±0.10			0.81±0.15			1.25±0.20			2.50±0.20		
	(in.)	(0.020±0.004)			(0.032±0.006)			(0.049±0.008)			(0.098±0.008)		
(t) Terminal	mm	0.25±0.15			0.35±0.15			0.50±0.25			0.50±0.25		
	(in.)	(0.010±0.006)			(0.014±0.006)			(0.020±0.010)			(0.020±0.010)		
WVDC		50	50	100	200	100	200	100	200	100	200		
	24	F	A	A	A	H	H	D	D	D	D		
	27	F	A	A	A	H	H	D	D	D	D		
Cap (pF)	30	F	A	A	A	H	H	D	D	D	D		
	33	F	A	A	A	H	H	D	D	D	D		
	36	F	A	A	A	H	H	D	D	D	D		
	39	F	A	A	A	H	H	D	D	D	D		
	43		A	A	A	H	H	D	D	D	D		
	47		A	A	A	H	H	D	D	D	D		
	51		A	A	A	H	H	D	D	D	D		
	56		A	A	A	H	H	D	D	D	D		
	68		A	A	A	H	H	D	D	D	D		
	75		A	A		H	H	D	D	D	D		
	82		A	A		H	H	D	D	D	D		
	91		A	A		H	H	D	D	D	D		
	100		A	A		H	H	D	D	D	D		
	110							D	D	D	D		
	120							D	D	D	D		
	130							D	D	D	D		
	140							D	D	D	D		
	150							D	D	D	D		
	160							D	D	D	D		
	180							D	D	D	D		
	200							D	D	D	D		
	220							D	D	D	D		
	270							D	D	D	D		
	300							D	D	D	D		
	330							D	D	D	D		
	360							D	D	D	D		
	390							D	D	D	D		
	430							D	D	D	D		
	470							D	D	D	D		
	510							D	D	D	D		
	560							D	D	D	D		
	620							D	D	D	D		
	680							D	D	D	D		
	750							D	D	D	D		
	820							D	D	D	D		
	910							D	D	D	D		
	1000							D	D	D	D		
WVDC		50	50	100	200	100	200	100	200	100	200		
SIZE		0402			0603			0805			1210		

Case Size	0402 (KGQ05)	0603 (KGQ15)	0805 (KGQ21)	1210 (KGQ32)
Thickness Letter	F	A	H	D
Max Thickness(mm)	0.60	0.90	1.15	1.40
Carrier Tape	PAPER	PAPER	PAPER	PAPER
Packaging Code 7"reel	H	T	T	T
Packaging Code 13"reel	N	M	M	M
PAPER				

#### TOLERANCE OPTIONS

Capacitance Range	Available Tolerances
0.20-0.50 pF	B, C
0.60-6.2 pF	B, C, D
6.8- 9.1 pF	B, C, J, K, M
10-1000 pF	FG, J, K, M

# RF/Microwave Capacitors


## RF/Microwave C0G (NP0) Capacitors

### Ultra Low ESR "U" Series, C0G (NP0) Capacitors (RoHS), KGQ Series




#### ULTRA LOW ESR, "U" SERIES


TYPICAL ESR vs. FREQUENCY  
0402 "U" SERIES

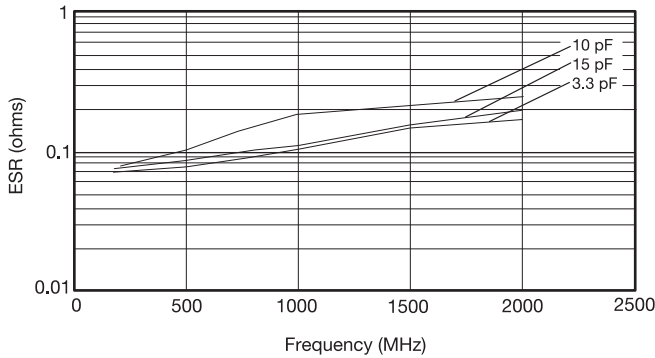


TYPICAL ESR vs. FREQUENCY  
0603 "U" SERIES

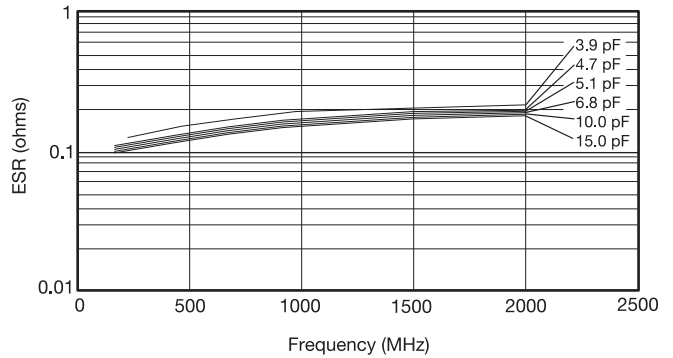

TYPICAL ESR vs. FREQUENCY  
0805 "U" SERIES

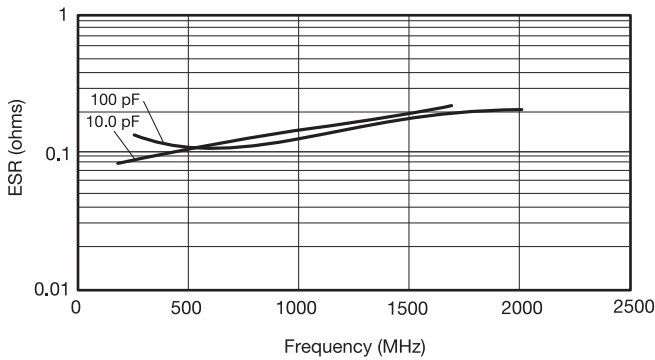


TYPICAL ESR vs. FREQUENCY  
1210 "U" SERIES

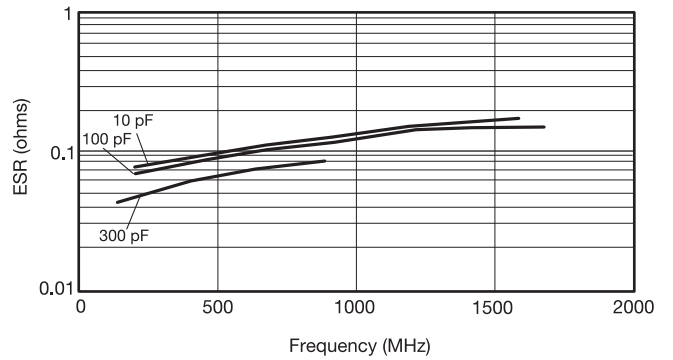

ESR Measured on the Boonton 34A

### TYPICAL SERIES RESONANT FREQUENCY "U" SERIES CHIP

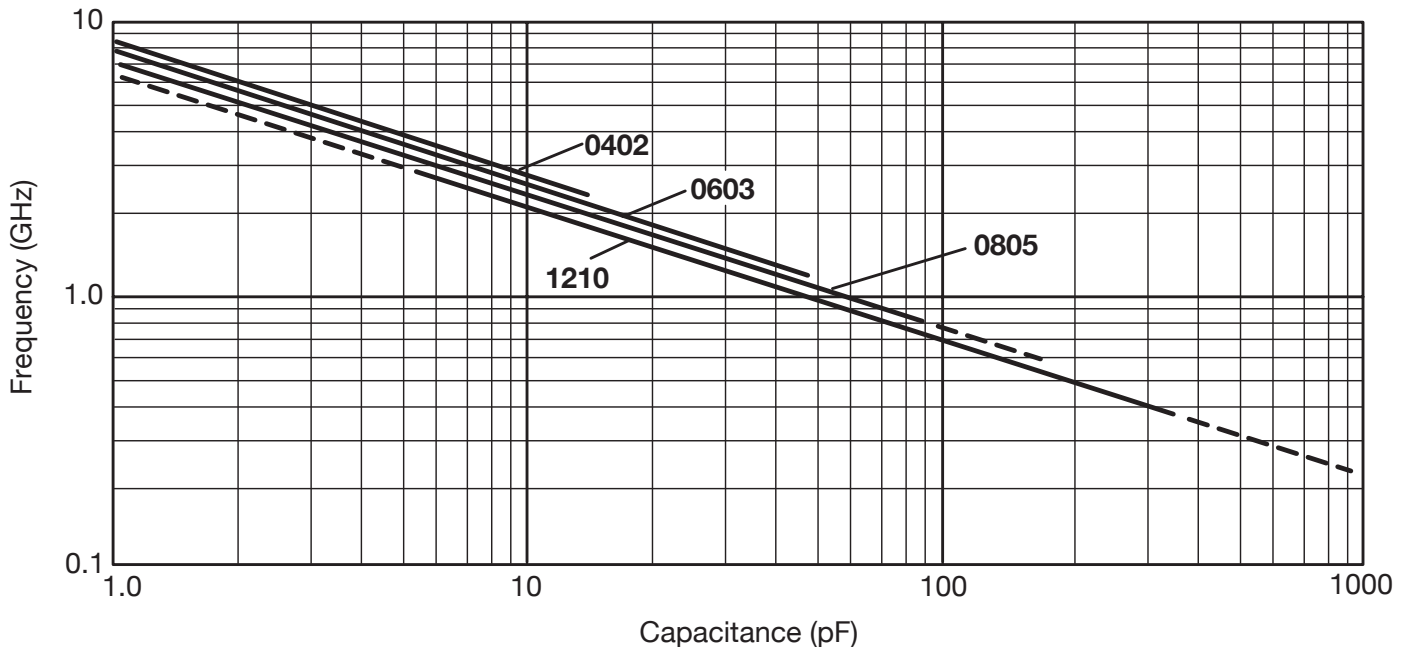

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.