


ML03511R4BAT2A Datasheet

www.digi-electronics.com

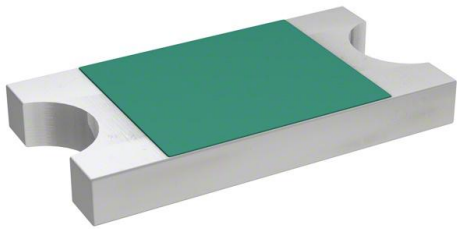

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	ML03511R4BAT2A-DG
Manufacturer	KYOCERA AVX
Manufacturer Product Number	ML03511R4BAT2A
Description	CAP CER 1.4PF 50V COG/NP0 0603
Detailed Description	1.4 pF \pm 0.1pF 50V Ceramic Capacitor COG, NP0 0603 (1608 Metric)

This model ML03511R4BAT2A is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

ML03511R4BAT2A

Series:

MLO™

Capacitance:

1.4 pF

Voltage - Rated:

50V

Operating Temperature:

-55°C ~ 125°C

Ratings:

-

Mounting Type:

Surface Mount, MLCC

Size / Dimension:

0.063" L x 0.033" W (1.60mm x 0.84mm)

Thickness (Max):

0.029" (0.74mm)

Lead Style:

-

Manufacturer:

KYOCERA AVX

Product Status:

Active

Tolerance:

±0.1pF

Temperature Coefficient:

COG, NPO

Features:

High Q, Low Loss

Applications:

RF, Microwave, High Frequency

Package / Case:

0603 (1608 Metric)

Height - Seated (Max):

-

Lead Spacing:

-

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8532.29.0040

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

Multilayer Organic (MLO®) Capacitors

General Information



GENERAL DESCRIPTION

Based on its patented multilayer low loss organic (MLO®) technology. These new capacitors represent a paradigm shift from traditional ceramic and thin film passive SMD components. Multilayer Organic Capacitors (MLOC) are polymer based capacitors that use high conductivity copper interconnects in a multilayer fashion. The ability to fabricate these components on large area substrates and state of the art laser direct imaging allow for improved cost benefits and tolerance control. The end result is a state of the art low ESR and high SRF low profile RF capacitor that can support frequencies well above one GHz. Additionally MLOCs are expansion matched to printed circuit boards to allow for improved reliability.

FEATURES

- Low ESR
- Hi-Q®
- High Self Resonance
- Tight Tolerance
- Low Dielectric Absorption (0.0015%)

APPLICATIONS

- RF Power Amplifiers
- Low Noise Amplifiers
- Filter Networks
- Instrumentation

HOW TO ORDER

ML

Style

03

Case Size
03 = 0603

7

Voltage Code
5 = 50V
V = 250V

1

Temperature Coefficient Code
1 = 0±30ppm

1R8

Capacitance
EIA Capacitance Code in pF.
First two digits = significant figures or "R" for decimal place.
Third digit = number of zeros or after "R" significant figures.

P

Capacitance Tolerance Code
P = ± 0.02 pF
A = ± .05 pF
B = ± .10 pF
C = ± .25 pF
D = ± .5 pF
F = ± 1%
G = ± 2%
J = ± 5%


A

Failure Rate Code
A = Not Applicable

P

Termination Style Code
T = Ni, Sn

2A

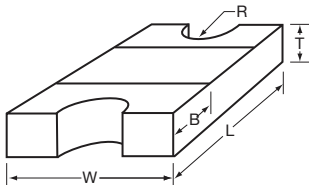Packaging Code
2A = 7" Reel Unmarked

MECHANICAL DIMENSIONS: inches (millimeters)

Case	Length (L)	Width (W)	Thickness (T)	Band Width (B)	Castellation Radius (R)
0603	0.063 ± 0.004 (1.600 ± 0.102)	0.033 ± 0.004 (0.838 ± 0.102)	0.025 ± 0.004 (0.635 ± 0.102)	0.015 ± 0.005 (0.381 ± 0.127)	0.008 ± 0.002 (0.203 ± 0.051)

TAPE & REEL: All tape and reel specifications are in compliance with EIA RS481 (equivalent to IEC 286 part 3).

—8mm carrier

—7" reel, 3,000 pcs per reel

Multilayer Organic (MLO®) Capacitors

Mechanical & Environmental Specifications

ENVIRONMENTAL CHARACTERISTICS

TEST	CONDITIONS	REQUIREMENT
Life (Endurance) MIL-STD-202F Method 108A	125°C, 2UR, 1000 hours	No visible damage $\Delta C/C \leq 2\%$ for $C \geq 5\text{pF}$ $\Delta C/C \leq 0.25\text{pF}$ for $C < 5\text{pF}$
Accelerated Damp Heat Steady State MIL-STD-202F Method 103B	85°C, 85% RH, UR, 1000 hours	No visible damage $\Delta C/C \leq 2\%$ for $C \geq 5\text{pF}$ $\Delta C/C \leq 0.25\text{pF}$ for $C < 5\text{pF}$
Temperature Cycling MIL-STD-202F Method 107E MIL-STD-883D Method 1010.7	-55°C to +125°C, 15 cycles – MLO®	No visible damage $\Delta C/C \leq 2\%$ for $C \geq 5\text{pF}$ $\Delta C/C \leq 0.25\text{pF}$ for $C < 5\text{pF}$
Resistance to Solder Heat IEC-68-2-58	260°C \pm 5°C for 10 secs.	C remains within initial limits

MECHANICAL SPECIFICATIONS

TEST	CONDITIONS	REQUIREMENT
Solderability IEC-68-2-58	Components completely immersed in a solder bath at 235°C for 2 secs.	Terminations to be well tinned, minimum 95% coverage
Leach Resistance IEC-68-2-58	Components completely immersed in a solder bath at 260 \pm 5°C for 60 secs.	Dissolution of termination faces $\leq 15\%$ of area Dissolution of termination edges $\leq 25\%$ of length
Adhesion MIL-STD-202F Method 211A	A force of 5N applied for 10 secs.	No visible damage
Termination Bond Strength IEC-68-2-21 Amend. 2	Tested as shown in diagram	No visible damage $C/C \leq 2\%$ for $C \geq 5\text{pF}$ $\Delta C/C \leq 0.25\text{pF}$ for $C < 5\text{pF}$
Robustness of Termination IEC-68-2-21 Amend. 2	A force of 5N applied for 10 secs.	No visible damage
Storage	12 months minimum with components stored in "as received" packaging	Good solderability

QUALITY & RELIABILITY

MLO® capacitors utilize high density interconnect wiring technology on well established low loss organic materials.

FINAL QUALITY INSPECTION

Finished parts are tested for standard electrical parameters and visual/mechanical characteristics. Each production lot is 100% evaluated for: capacitance and proof voltage at 2.5 U_R . In addition, production is periodically evaluated for:

- Average capacitance with histogram printout for capacitance distribution;
- IR and Breakdown Voltage distribution;
- Temperature Coefficient;
- Solderability;
- Dimensional, mechanical and temperature stability.

QUALITY ASSURANCE

The reliability of these multilayer organic capacitors has been extensively

studied. Various methods and standards have been used to ensure a high quality component including JEDEC, Mil Spec and IPC testing. KYOCERA AVX quality assurance policy is based on well established international industry standards. The reliability of the capacitors is determined by accelerated testing under the following conditions:

Life (Endurance)	125°C, 2U _R , 1000 hours
Accelerated Damp Heat Steady State	85°C, 85% RH, U _R , 1000 hours.

TABLE I: CASE SIZE ML03


Cap. pF	Cap. Tol.	WVDC	Cap. pF	Cap. Tol.	WVDC	Cap. pF	Cap. Tol.	WVDC
0.1	P, A, B	50, 250	1.3	P, A, B, C	50, 250	3.0	P, A, B, C	50, 250
0.2	P, A, B	50, 250	1.4	P, A, B, C	50, 250	3.3	P, A, B, C	50, 250
0.3	P, A, B	50, 250	1.5	P, A, B, C	50, 250	3.6	P, A, B, C	50, 250
0.4	P, A, B	50, 250	1.6	P, A, B, C	50, 250	3.9	P, A, B, C	50, 250
0.5	P, A, B, C	50, 250	1.7	P, A, B, C	50, 250			
0.6	P, A, B, C	50, 250	1.8	P, A, B, C	50, 250			
0.7	P, A, B, C	50, 250	1.9	P, A, B, C	50, 250			
0.8	P, A, B, C	50, 250	2.0	P, A, B, C	50, 250			
0.9	P, A, B, C	50, 250	2.2	P, A, B, C	50, 250			
1.0	P, A, B, C	50, 250	2.4	P, A, B, C	50, 250			
1.1	P, A, B, C	50, 250	2.5	P, A, B, C	50, 250			
1.2	P, A, B, C	50, 250	2.7	P, A, B, C	50, 250			

Note: Capacitance measured at 1MHz.


Multilayer Organic (MLO®) Capacitors

MLO® Capacitors

Typical ESR vs. Frequency MLO® 0603

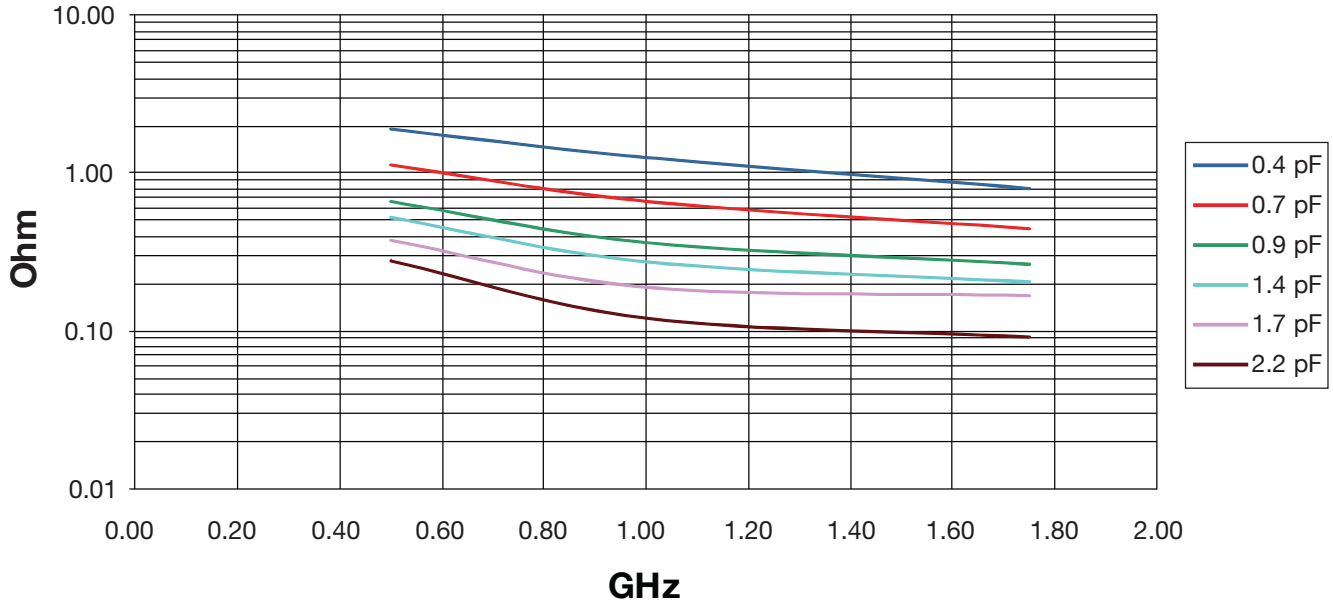


Typical Q vs. Frequency MLO® 0603

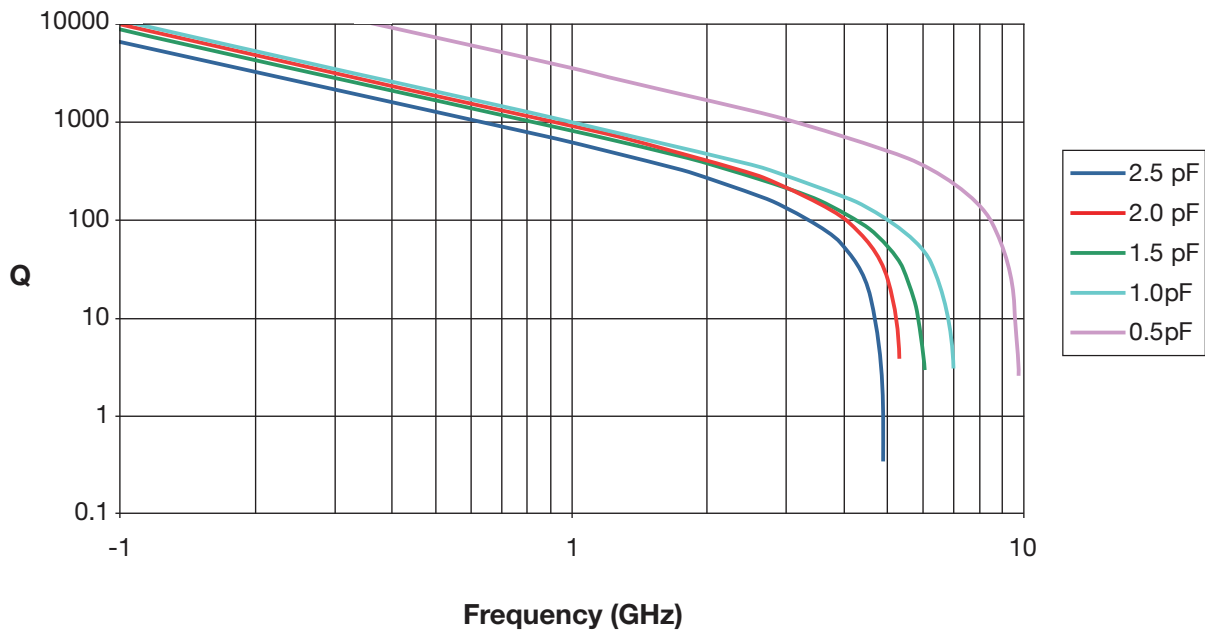

Multilayer Organic (MLO[®]) Capacitors

MLO[®] Capacitors

Typical Self Resonant Frequency vs. Capacitance MLO[®] 0603

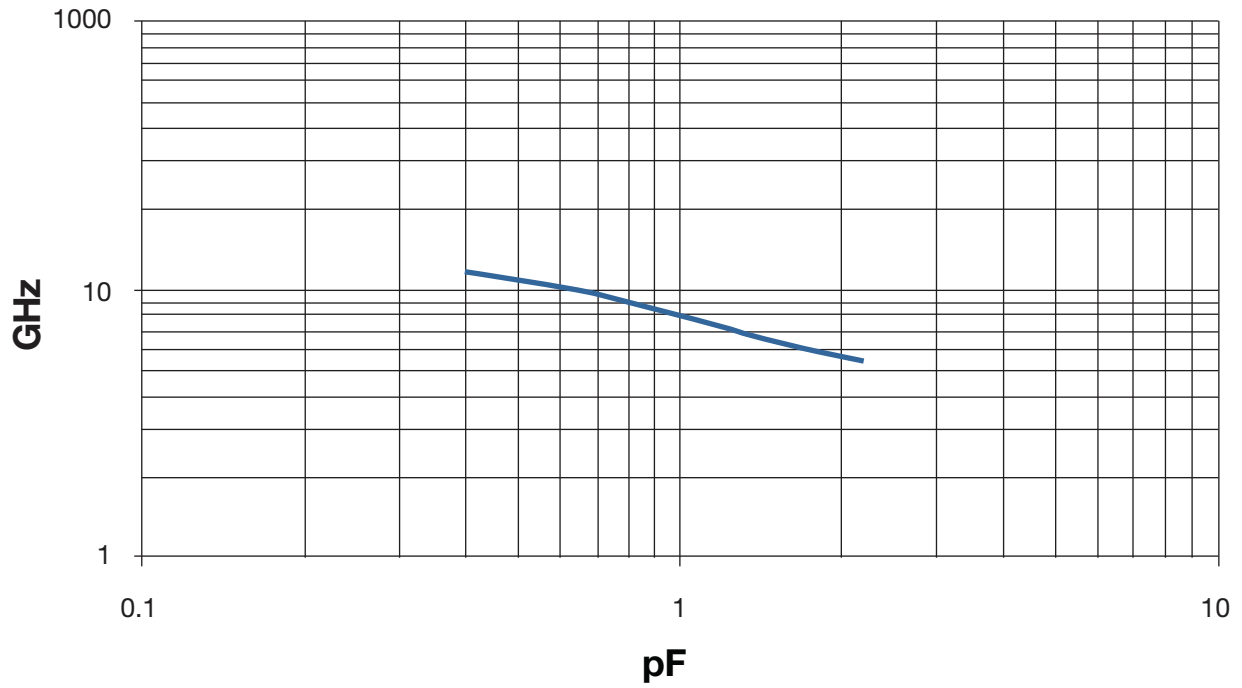

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.