

KTA1504-O-TP Datasheet

www.digi-electronics.com



| | |
|------------------------------|--|
| DiGi Electronics Part Number | KTA1504-O-TP-DG |
| Manufacturer | Micro Commercial Co |
| Manufacturer Product Number | KTA1504-O-TP |
| Description | TRANS PNP 50V 0.15A SOT23 |
| Detailed Description | Bipolar (BJT) Transistor PNP 50 V 150 mA 80MHz 150 mW Surface Mount SOT-23 |

<https://www.DiGi-Electronics.com>



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

KTA1504-O-TP

Series:

-

Transistor Type:

PNP

Voltage - Collector Emitter Breakdown (Max):

50 V

Current - Collector Cutoff (Max):

100nA (ICBO)

Power - Max:

150 mW

Operating Temperature:

-55°C ~ 150°C (TJ)

Package / Case:

TO-236-3, SC-59, SOT-23-3

Base Product Number:

KTA1504

Manufacturer:

Micro Commercial Co

Product Status:

Obsolete

Current - Collector (Ic) (Max):

150 mA

Vce Saturation (Max) @ Ib, Ic:

300mV @ 10mA, 100mA

DC Current Gain (hFE) (Min) @ Ic, Vce:

70 @ 2mA, 6V

Frequency - Transition:

80MHz

Mounting Type:

Surface Mount

Supplier Device Package:

SOT-23

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

ECCN:

EAR99

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8541.21.0095

Features

- Complementary to KTC3875
- Low Noise
- Halogen Free. "Green" Device (Note 1)
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)


Maximum Ratings @ 25°C Unless Otherwise Specified

- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C
- Thermal Resistance: 833°C/W Junction to Ambient

| Parameter | Symbol | Rating | Unit |
|------------------------------|-----------|--------|------|
| Collector-Base Voltage | V_{CBO} | -50 | V |
| Collector-Emitter Voltage | V_{CEO} | -50 | V |
| Emitter-Base Voltage | V_{EBO} | -5 | V |
| Continuous Collector Current | I_C | -150 | mA |
| Power Dissipation | P_D | 150 | mW |



Note: 1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

Internal Structure

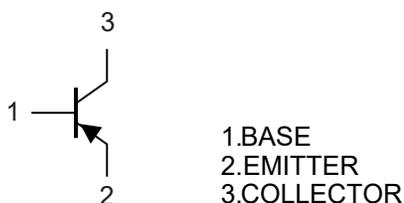


PNP Silicon Epitaxial Transistors

SOT-23



| DIM | DIMENSIONS | | | | NOTE |
|-----|------------|-------|------|------|------|
| | INCHES | | MM | | |
| | MIN | MAX | MIN | MAX | |
| A | 0.110 | 0.120 | 2.80 | 3.04 | |
| B | 0.083 | 0.104 | 2.10 | 2.64 | |
| C | 0.047 | 0.055 | 1.20 | 1.40 | |
| D | 0.034 | 0.041 | 0.85 | 1.05 | |
| E | 0.067 | 0.083 | 1.70 | 2.10 | |
| F | 0.018 | 0.024 | 0.45 | 0.60 | |
| G | 0.0004 | 0.006 | 0.01 | 0.15 | |
| H | 0.035 | 0.043 | 0.90 | 1.10 | |
| J | 0.003 | 0.007 | 0.08 | 0.18 | |
| K | 0.012 | 0.020 | 0.30 | 0.51 | |
| L | 0.007 | 0.020 | 0.20 | 0.50 | |

Suggested Solder Pad Layout

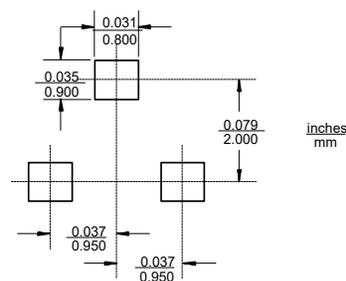

Electrical Characteristics @ $T_A=25^\circ\text{C}$ Unless Otherwise Specified

| Parameter | Symbol | Min | Typ | Max | Units | Conditions |
|--------------------------------------|---------------|-----|-----|------|-------|--|
| Collector-Base Breakdown Voltage | $V_{(BR)CBO}$ | -50 | | | V | $I_C=-100\mu\text{A}, I_E=0$ |
| Collector-Emitter Breakdown Voltage | $V_{(BR)CEO}$ | -50 | | | V | $I_C=-1\text{mA}, I_B=0$ |
| Emitter-Base Breakdown Voltage | $V_{(BR)EBO}$ | -5 | | | V | $I_E=-100\mu\text{A}, I_C=0$ |
| Collector-Base Cutoff Current | I_{CBO} | | | -100 | nA | $V_{CB}=-50\text{V}, I_E=0$ |
| Emitter-Base Cutoff Current | I_{EBO} | | | -100 | nA | $V_{EB}=-5\text{V}, I_C=0$ |
| DC Current Gain | h_{FE} | 70 | | 400 | | $V_{CE}=-6\text{V}, I_C=-2\text{mA}$ |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | | | -0.3 | V | $I_C=-100\text{mA}, I_B=-10\text{mA}$ |
| Transition Frequency | f_T | 80 | | | MHz | $V_{CE}=-10\text{V}, I_C=-1\text{mA}$ |
| Collector-Base Capacitance | C_{ob} | | | 7 | pF | $V_{CB}=-10\text{V}, I_E=0, f=1\text{MHz}$ |

Classification of h_{FE}

| | | | |
|---------|--------|---------|---------|
| Rank | O | Y | GR |
| Range | 70-140 | 120-240 | 200-400 |
| Marking | ASO | ASY | ASG |

Curve Characteristics

Fig. 1 - Static Characteristics

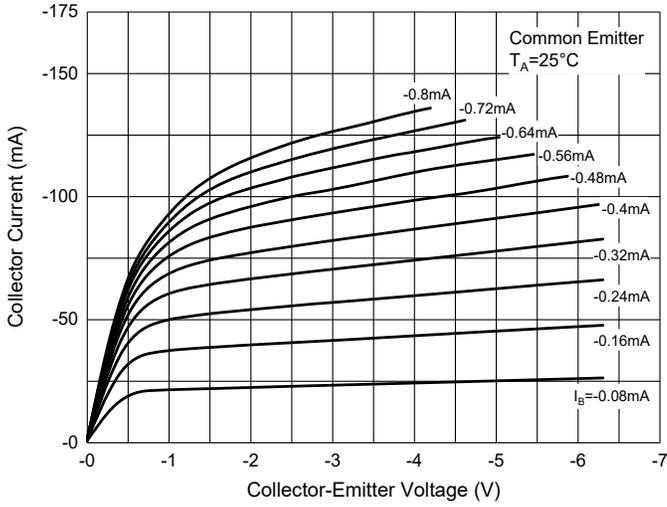


Fig. 2 - DC Current Gain Characteristics

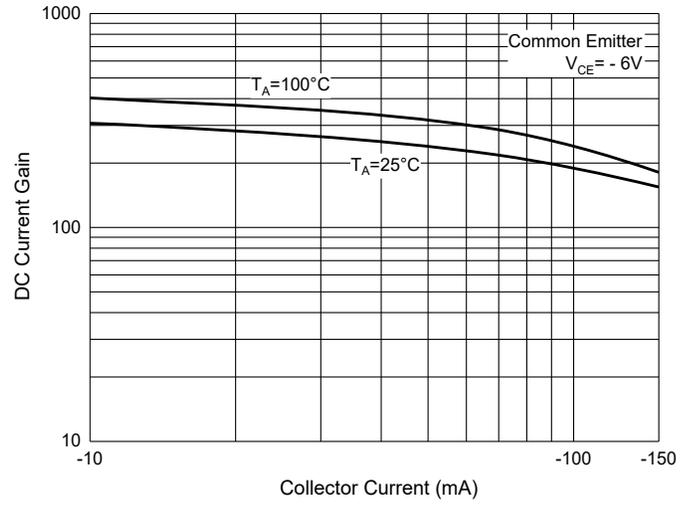


Fig. 3 - Collector-Emitter Saturation Voltage Characteristics

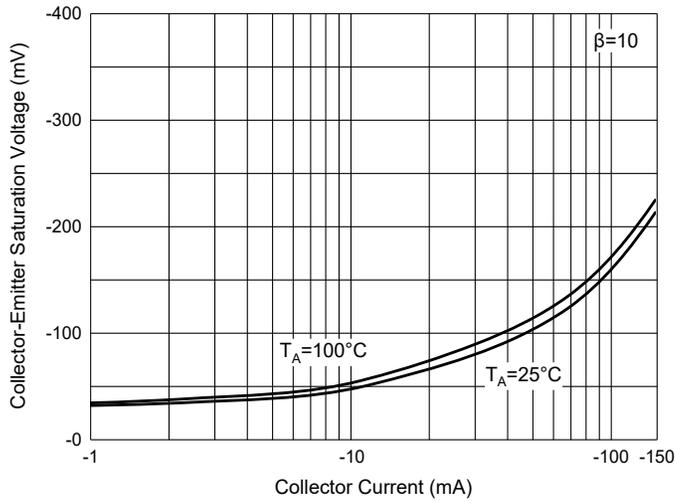


Fig. 4 - Base-Emitter Saturation Voltage Characteristics

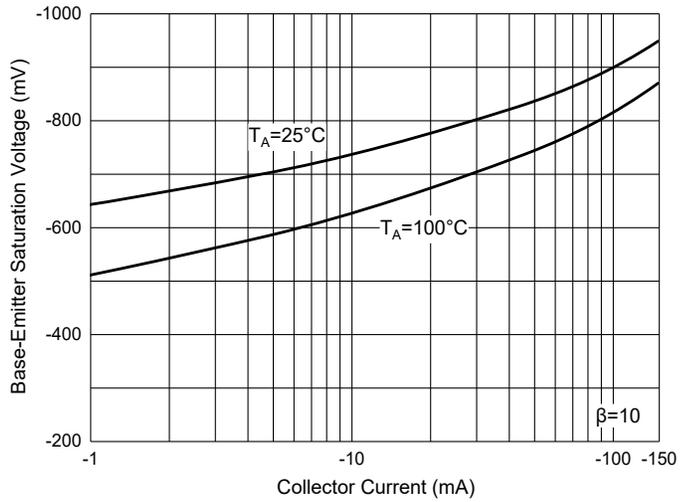


Fig. 5 - Base-Emitter Voltage Characteristics


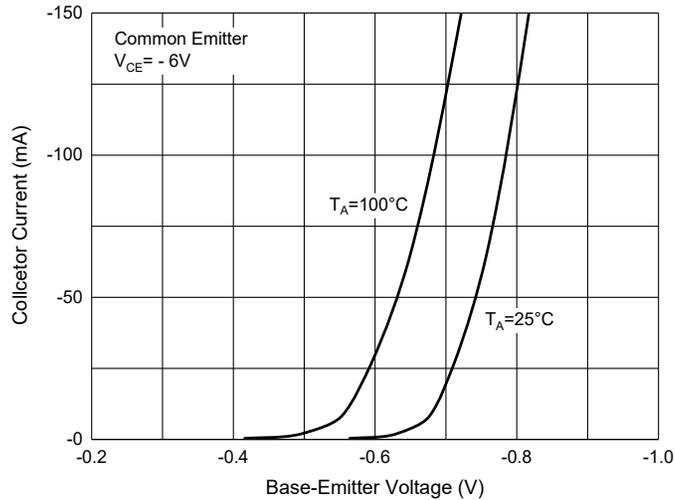


Fig. 6 - Collector Power Derating Curve

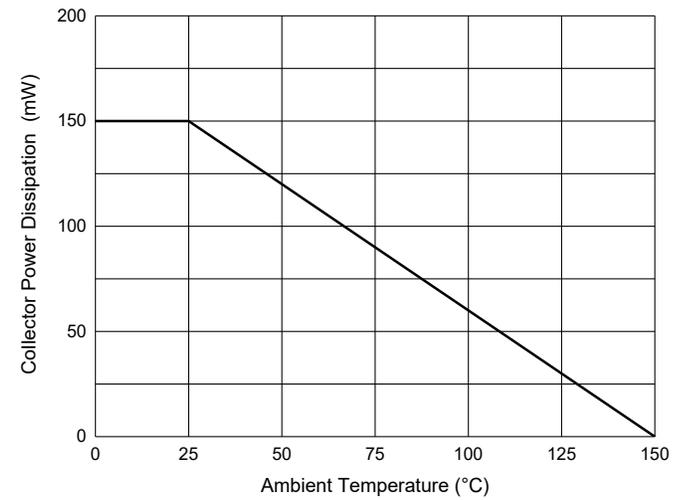

Ordering Information

| Device | Packing |
|----------------|-----------------------|
| Part Number-TP | Tape&Reel: 3Kpcs/Reel |

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp** . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp** . and all the companies whose products are represented on our website, harmless against all damages. **Micro Commercial Components Corp.** products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.mccsemi.com/Home/TermsAndConditions>.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.