

BPF-A535+ Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	BPF-A535+-DG
Manufacturer	Mini-Circuits
Manufacturer Product Number	BPF-A535+
Description	RF FILTER BAND PASS 535MHZ 14SMD
Detailed Description	535MHz Center Frequency Band Pass RF Filter (Radio Frequency) 150MHz Bandwidth 2dB 14-SMD Module

This model BPF-A535+ is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

BPF-A535+

Series:

-

Frequency:

535MHz Center

Filter Type:

Band Pass

Insertion Loss:

2dB

Package / Case:

14-SMD Module

Height (Max):

0.350" (8.89mm)

Manufacturer:

Mini-Circuits

Product Status:

Active

Bandwidth:

150MHz

Ripple:

-

Mounting Type:

Surface Mount

Size / Dimension:

1.360" L x 0.365" W (34.54mm x 9.27mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

ECCN:

EAR99

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8548.00.0000

Surface Mount Bandpass Filter

BPF-A535+

50Ω 460 to 610 MHz



Generic photo used for illustration purposes only

CASE STYLE: HQ1157

The Big Deal

- Sharp roll-off
- Low passband IL
- Miniature shielded package

Product Overview

The BPF-A535+ is a 50Ω bandpass filter in a shielded package (size of 0.365" x 1.360" x 0.35") fabricated using SMT technology. Covering 535 MHz ± 75 MHz band width, these units offer good matching within the passband and low IL in the passband. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability. In addition it has consistent performance across temperature.

Key Features

Feature	Advantages
Good VSWR, 1.25:1 typical over passband	Good return loss over the passband which provides better impedance matching when cascaded with other devices.
Sharp roll-off	Sharp roll-off helps in adjacent channel rejection and hence increased selectivity.
Shielded case	Reduced interference with the surrounding components.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount Bandpass Filter

BPF-A535+

50Ω 460 to 610 MHz



Generic photo used for illustration purposes only
CASE STYLE: HQ1157

Features

- Sharp roll-off
- Low passband IL
- Shielded case

Applications

- Biomedical telemetry devices
- Wireless microphones
- Television broadcasting

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	535	—	MHz	
	Insertion Loss	F1-F2	460 - 610	—	1.3	2.0	dB
	VSWR	F1-F2	460 - 610	—	1.25	1.5	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC - 380	30	40	—	dB
	VSWR	DC-F3	DC - 380	—	20	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	700 - 1600	20	30	—	dB
	VSWR	F4-F5	700 - 1600	—	20	—	:1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5 W Max.

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic

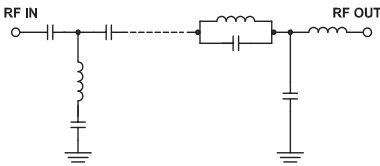

Typical Frequency Response




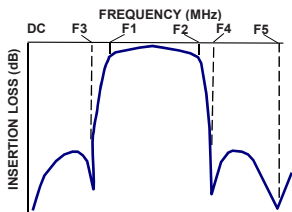


Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1.0	84.13	566.36	460	7.53
50.0	51.74	1151.52	470	6.49
100.0	48.26	933.46	480	5.86
380.0	51.11	41.88	490	5.45
392.5	30.98	32.72	500	5.18
395.0	28.19	30.71	510	5.00
402.5	21.26	24.46	520	4.89
432.5	3.41	2.95	525	4.86
437.5	2.27	2.03	530	4.84
460.0	0.99	1.09	535	4.84
535.0	0.80	1.21	540	4.85
610.0	1.34	1.02	550	4.92
625.0	2.71	1.94	560	5.07
630.0	3.99	2.76	570	5.28
655.0	19.19	10.96	580	5.60
665.0	29.64	12.86	590	6.08
700.0	32.35	15.96	595	6.43
1000.0	42.19	32.63	600	6.88
1300.0	45.28	27.29	605	7.48
1600.0	47.92	28.53	610	8.22

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

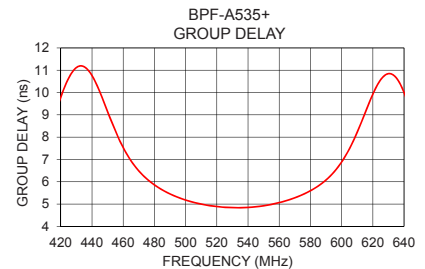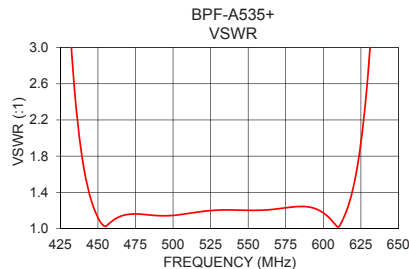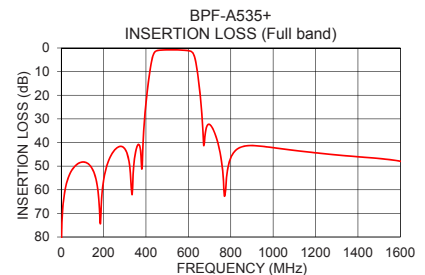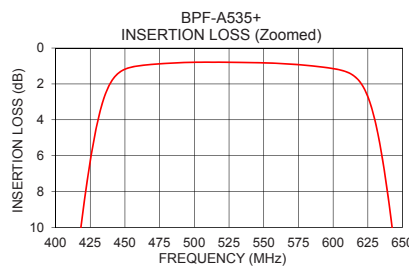

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




Bandpass Filter

BPF-A535+

Pad Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7,9,10,11,12,13,14

Demo Board MCL P/N: TB-363+
Suggested PCB Layout (PL-227)

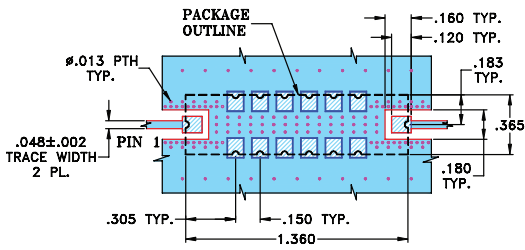


NOTE:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

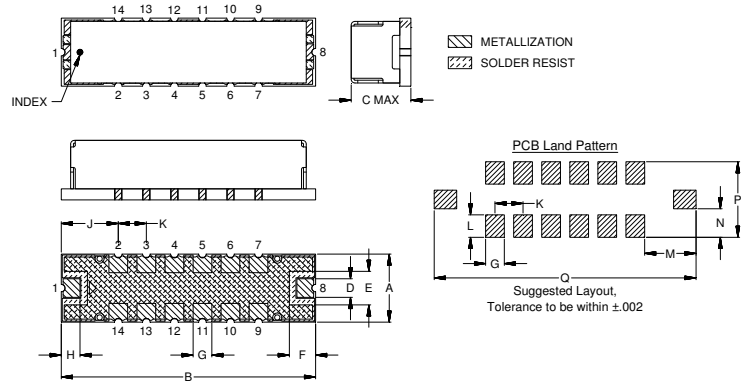

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H
.365	1.360	.35	.100	.180	.140	.100	.100
9.27	34.54	8.89	2.54	4.57	3.56	2.54	2.54
J	K	L	M	N	P	Q	Wt.
.305	.150	.120	.275	.152	.405	1.400	grams
7.75	3.81	3.05	6.99	3.86	10.29	35.56	4.0

Note: Please refer to case style drawing for details

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.