

# SYD-20-33+ Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)



DiGi Electronics Part Number	SYD-20-33+-DG
Manufacturer	<a href="#">Mini-Circuits</a>
Manufacturer Product Number	SYD-20-33+
Description	RF DIR COUPLER 30MHZ-3GHZ 8SMD
Detailed Description	RF Directional Coupler General Purpose 30MHz ~ 3G Hz 21.5 ± 0.5dB 1W 8-SMD, No Lead

<https://www.DiGi-Electronics.com>

This model SYD-20-33+ is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

SYD-20-33+

Series:

-

Coupler Type:

Standard

Coupling Factor:

21.5 ± 0.5dB

Insertion Loss:

-

Isolation:

-

Package / Case:

8-SMD, No Lead

Manufacturer:

Mini-Circuits

Product Status:

Active

Frequency:

30MHz ~ 3GHz

Applications:

General Purpose

Power - Max:

1W

Return Loss:

34.45dB

Supplier Device Package:

-

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

ECCN:

EAR99

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8548.00.0000



## SURFACE MOUNT

## Directional Coupler

SYD-20-33+

50Ω

30 to 3000 MHz

## FEATURES

- Wideband, 30-3000 MHz
- Low mainline loss, 1.6 dB typ.
- Excellent VSWR, 1.15:1 typ; all ports
- Good flatness,  $\pm 0.6$  dB typ.

## APPLICATIONS

- VHF/UHF receivers/transmitters
- Cellular, PCS, PCN, UMTS
- ISM
- GPS
- Instrumentation



Generic photo used for illustration purposes only

CASE STYLE: AH202

**+RoHS Compliant**The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

## ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Units
Frequency Range		30		3000	MHz
Mainline Loss <sup>1</sup>	30-3000	—	1.6	2.5	dB
	800-1000	—	1.1	1.5	
	1700-2000	—	1.3	1.8	
	2300-2700	—	1.5	2.1	
Coupling Nominal	30-3000	—	20.8 $\pm$ 0.8	—	dB
	800-1000	—	21.5 $\pm$ 0.5	—	
	1700-2000	—	21.1 $\pm$ 0.6	—	
	2300-2700	—	20.8 $\pm$ 0.7	—	
Coupling Flatness( $\pm$ )	30-3000	—	1.4	—	dB
	800-1000	—	0.3	—	
	1700-2000	—	0.5	—	
	2300-2700	—	0.5	—	
Directivity	30-3000	9	15	—	dB
	800-1000	14	17	—	
	1700-2000	15	20	—	
	2300-2700	11	16	—	
VSWR	30-3000	—	1.20	—	:1
	800-1000	—	1.10	—	
	1700-2000	—	1.15	—	
	2300-2700	—	1.20	—	
Input Power	30-3000	—	—	1	W


1. Mainline loss includes theoretical power loss at coupled port.

## MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

## ELECTRICAL SCHEMATIC



\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.



**SURFACE MOUNT**

# Directional Coupler

**SYD-20-33+**



50Ω


30 to 3000 MHz

**PAD CONNECTIONS**

INPUT	8
OUTPUT	1
COUPLED	5
GROUND	2, 3,4,6, 7

**PRODUCT MARKING:** N/A


**SUGGESTED PCB LAYOUT (PL-160)**

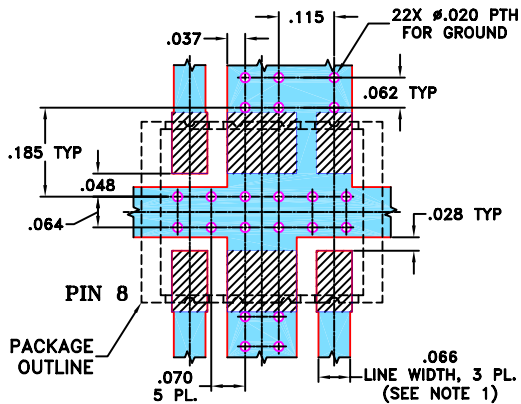

- NOTE:**
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS .030 ± .002. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

**OUTLINE DRAWING**

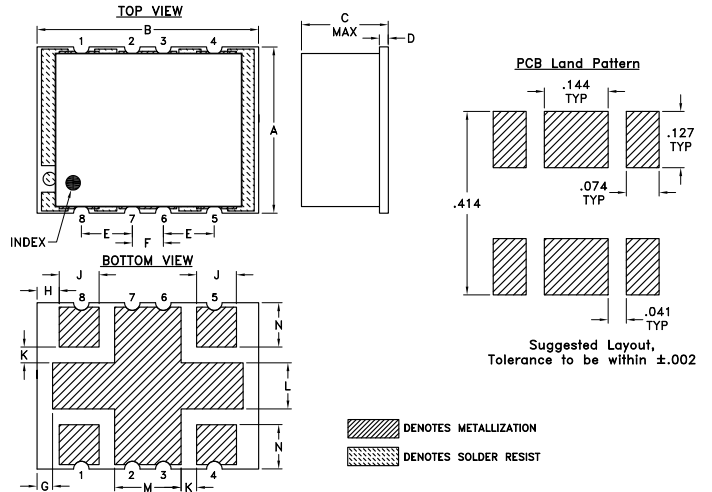

**OUTLINE DIMENSIONS (Inches/mm)**

A	B	C	D	E	F	G	H
.38	.50	.25	.020	.115	.070	.035	.050
9.65	12.70	6.35	0.51	2.92	1.78	0.89	1.27
J	K	L	M	N	wt		
.090	.040	.105	.140	.095	grams		
2.29	1.02	2.67	3.56	2.41	0.80		

**TAPE & REEL INFORMATION: F61**



**SURFACE MOUNT**

# Directional Coupler

**SYD-20-33+**






50Ω

30 to 3000 MHz

**TYPICAL PERFORMANCE DATA**

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)	Directivity (dB)	Return Loss (dB)		
	In-Out	In-Cpl			In	Out	Cpl
30.00	0.90	20.67	17.67	22.43	22.47	27.83	
300.00	0.99	21.31	18.13	28.54	29.57	28.33	
800.00	1.11	21.70	17.81	31.11	34.45	24.69	
1000.00	1.16	21.66	18.18	29.83	33.18	23.65	
1400.00	1.25	21.45	21.56	26.80	31.14	22.13	
1700.00	1.33	21.30	28.32	25.73	31.37	22.07	
2000.00	1.44	21.15	34.38	23.57	29.10	21.71	
2300.00	1.53	21.02	23.71	19.74	23.26	19.17	
2700.00	1.74	21.25	17.00	14.71	16.41	14.45	
3000.00	1.97	22.06	14.14	12.06	13.23	12.37	

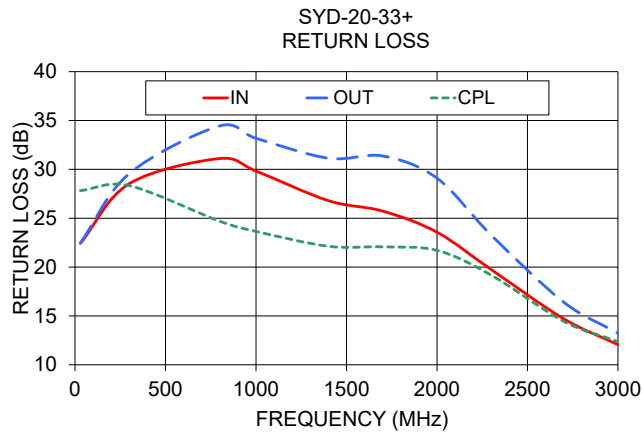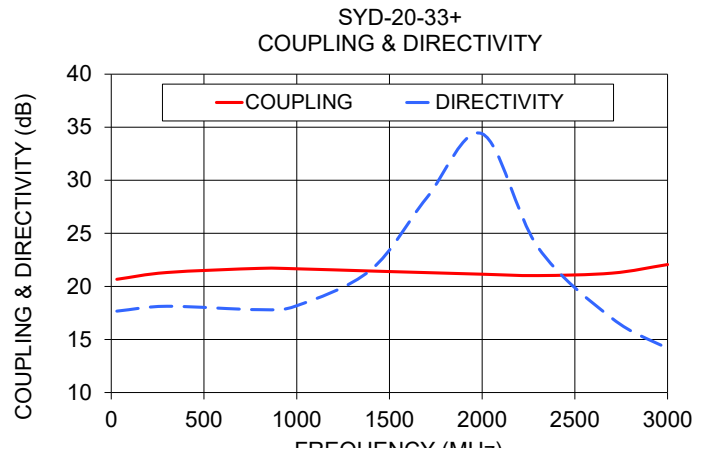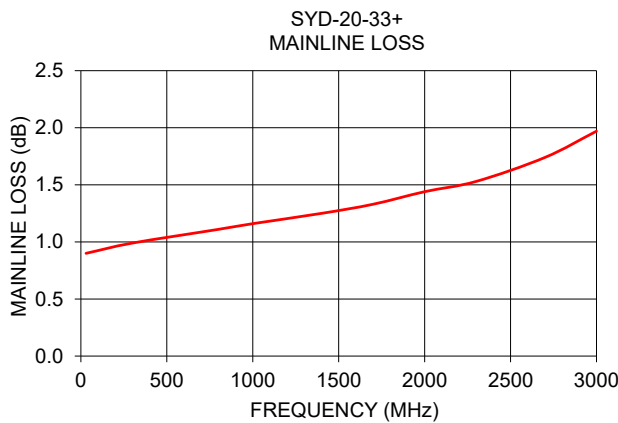

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.