


MTSMC-G-F4-IP Datasheet

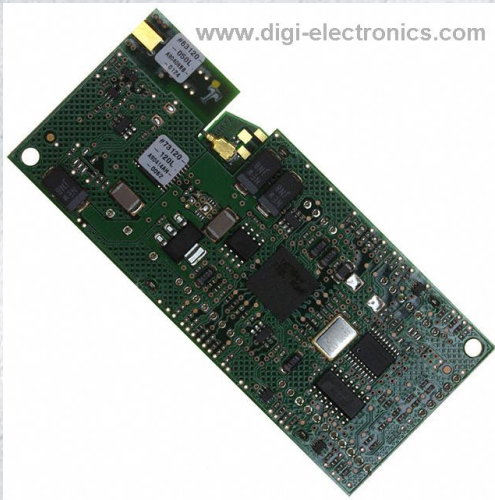

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	MTSMC-G-F4-IP-DG
Manufacturer	Multi-Tech Systems Inc.
Manufacturer Product Number	MTSMC-G-F4-IP
Description	RF TXRX MOD CELLMMCX TH
Detailed Description	Cellular GPRS, GSM Transceiver Module 850MHz, 900MHz, 1.8GHz, 1.9GHz Antenna Not Included, MMC X Through Hole

This model MTSMC-G-F4-IP is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

MTSMC-G-F4-IP

Series:

SocketModem® GPRS

Part Status:

Obsolete

RF Family/Standard:

Cellular

Modulation:

-

Data Rate:

115.2kbps

Sensitivity:

-

Antenna Type:

Antenna Not Included, MMCX

Memory Size:

-

Current - Receiving:

400mA

Mounting Type:

Through Hole

Package / Case:

Module

Manufacturer:

Multi-Tech Systems Inc.

Packaging:

Tray

DiGi-Electronics Programmable:

Not Verified

Protocol:

GPRS, GSM

Frequency:

850MHz, 900MHz, 1.8GHz, 1.9GHz

Power - Output:

-

Serial Interfaces:

UART

Utilized IC / Part:

-

Voltage - Supply:

5V

Current - Transmitting:

400mA

Operating Temperature:

-30°C ~ 70°C

Base Product Number:

MTSMC-G

Environmental & Export classification

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

5A002A1 MUL

REACH Status:

REACH Unaffected

HTSUS:

8517.62.0090

SocketModem® GPRS

Embedded Cellular Modem




The SocketModem® GPRS cellular modem is a complete, ready-to-integrate, communications device that offers standards-based GSM/GPRS Class 10 performance. This quick-to-market communications device allows developers to add wireless communication to products with a minimum of development time and expense. The intelligence of the embedded Universal IP™ stack, available on certain models, allows for automatic/persistent connectivity for mission critical applications and enhanced M2M functionality. The SocketModem GPRS cellular modem is based on industry-standard open interfaces and utilizes Multi-Tech's Universal Socket design.

Features

- GPRS Class 10
- Quad-band GSM 850/900/1800/1900 MHz
- Packet data up to 85.6K bps
- Universal Socket connectivity
- Universal IP connectivity
- Circuit-switched data up to 14,400 bps transparent and non-transparent
- Short Message Services (SMS)
- Advanced management features include phone book management, fixed dialing number, real time clock and alarm management
- MMCX antenna connector and SIM socket
- Serial interface supports DTE speeds to 115.2K bps
- AT command compatible
- MNP 2 error correction, V.42bis compression
- Two-year warranty

Universal Socket Benefits

- Interchangeable communications devices
- Quick-to-market
- Global approvals
- Easy migration to future networks

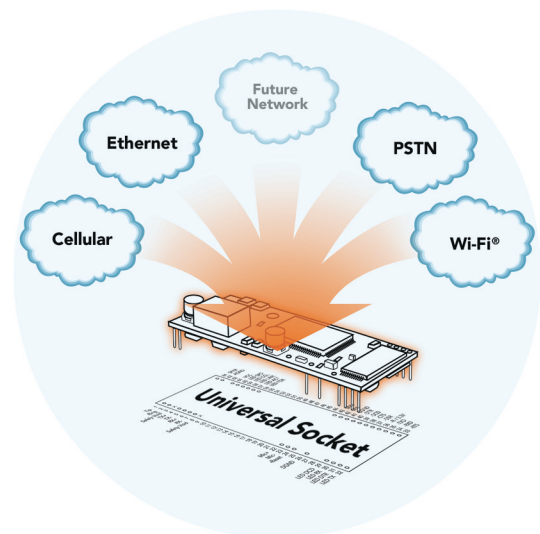

Highlights

Applications. The SocketModem GPRS cellular modem is targeted at applications that periodically need to send or receive data over a wireless network. It is ideal for:


- Appliances
- Asset tracking
- ATM terminals
- Automotive
- Data collection
- Industrial and medical remote monitoring systems
- Remote diagnostics
- Remote metering
- Security systems
- Vending/gaming machines
- Other devices requiring wireless connectivity

Reduces Development Time. The SocketModem GPRS cellular modem enhances your product while you focus on developing its core features. It actually provides faster time-to-market because it relieves the burden and expense of obtaining PTCRB and RF approvals.

Universal Socket Connectivity. Multi-Tech's Universal Socket is a flexible, comm-port architecture that provides cellular, Ethernet, PSTN or Wi-Fi network access with interchangeable communications devices. This means you can utilize one system design and populate it with your connectivity device of choice accommodating multiple connectivity requirements. In addition, you are assured a seamless migration to future technologies.

Universal IP. Multi-Tech's Universal IP consists of a common set of TCP/IP networking protocols and machine-to-machine (M2M) applications implemented using a standard AT command interface. Universal IP allows developers to write their host application one time while having the freedom to select from a growing number of Universal Socket communication devices. (Note: standard models contain a basic TCP/IP stack)

SocketModem GPRS Pin-Out. The SocketModem GPRS cellular modem interfaces easily with existing products through a standard serial communication channel. The serial DTE channel is capable of transfer speeds to 115.2K bps and can be interfaced directly to a UART or microcontroller. The complete on-board RF transceiver interfaces with an antenna for direct connection to wireless SMS, circuit-switched dial-up, or packet data networks. It also includes an onboard LED to display network status.

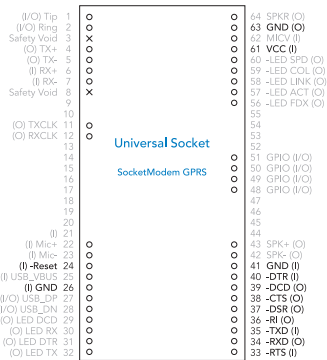

Developer's Kit. The Developer's Kit allows you to plug in the communications device and use it for testing, programming and evaluation. The kit includes one development board with RS-232 DB-25 connector, universal power supply, antenna and RS-232 cable.

Specifications

Packet Data Features

- GPRS Class 10, PBCCH support
- Coding Schemes: CS1 to CS4
- Embedded TCP/IP stack

Circuit Switched Data Features

- Asynchronous, transparent & non-transparent up to 14.4K bps, MNP2 & V.42 bis

SMS Features

- Text & PDU, Point-to-Point, cell broadcast

Connectors

- Antenna: MMCX
- SIM: Standard 3V SIM receptacle

IP Protocols Supported (MTSMC-G-F4-IP)

- DNS resolve, FTP client, Ping, POP3 client, PPP (dial-out), SMTP client, TCP RAW client & server, UDP RAW client & server, PAP, CHAP authentication

M2M Applications (MTSMC-G-F4-IP)

- Automatic connect/reconnect, device monitor, modem emulation, Ping & TCP keep alive, wake-up on Caller ID, wake-up on ring

Power Requirements

- 5VDC; 400mA typical, 1.4A maximum

Physical Description

- 3.1" L x 1.4" W x 0.5" H; 1 oz.
- (7.8 cm x 3.5 cm x 1.2 cm; 28 g)

Operating Environment

- 30° to +70° C (FCC certified from -30° to +50° C)

Certifications

- CE Mark, R&TTE
- EMC: FCC Part 22, 24, EN 301 489-1, EN 301 489-7, RSS 132, 133
- Safety: UL 60950-1, EN 60950-1, AS/NZS 60950:2000
- Network: PTCRB

Ordering Information

Product	Description	Region
MTSMC-G-F4*	GSM/GPRS Modem	Global
MTSMC-G-F4-ED†	GSM/GPRS Modem	Global
MTSMC-G-F4-V*	GSM/GPRS Modem with Voice	Global
MTSMC-G-F4-V-ED†	GSM/GPRS Modem with Voice	Global
MTSMC-G-F4-IP*	GSM/GPRS Modem with Universal IP	Global
MTSMC-G-F4-IP-ED†	GSM/GPRS Modem with Universal IP	Global

* Quad-band Modem, 850/1900 MHz default
 † Quad-band Modem, 900/1800 MHz default

Made in Mounds View, MN, U.S.A.

Features and specifications are subject to change without notice.

Trademarks / Registered Trademarks: SocketModem, Universal IP, Multi-Tech, and the Multi-Tech logo: Multi-Tech Systems, Inc. / All other products and technologies are the trademarks or registered trademarks of their respective holders.

World Headquarters
 Tel: (763) 785-3500
 (800) 328-9717
www.multitech.com

EMEA Headquarters
 Multi-Tech Systems (EMEA)
 United Kingdom
 Tel: +(44) 118-959 7774

Multi-Tech Systems (EMEA)
 France
 Tel: +(33) 1 49 19 22 06



OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.