

UCZ1C331MCS1GS Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	UCZ1C331MCS1GS-DG
Manufacturer	Nichicon
Manufacturer Product Number	UCZ1C331MCS1GS
Description	CAP ALUM 330UF 20% 16V SMD
Detailed Description	330 μ F 16 V Aluminum Electrolytic Capacitors Radial, Can - SMD 150mOhm @ 100kHz 3000 Hrs @ 125°C

This model UCZ1C331MCS1GS is available at DiGi.Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

UCZ1C331MCS1GS

Series:

UCZ

Capacitance:

330 μ F

Voltage - Rated:

16 V

Lifetime @ Temp.:

3000 Hrs @ 125°C

Polarization:

Polar

Applications:

General Purpose

Ripple Current @ High Frequency:

500 mA @ 100 kHz

Size / Dimension:

0.394" Dia (10.00mm)

Surface Mount Land Size:

0.406" L x 0.406" W (10.30mm x 10.30mm)

Package / Case:

Radial, Can - SMD

Manufacturer:

Nichicon

Product Status:

Not For New Designs

Tolerance:

\pm 20%

ESR (Equivalent Series Resistance):

150mOhm @ 100kHz

Operating Temperature:

-40°C ~ 125°C

Ratings:

-

Ripple Current @ Low Frequency:

250 mA @ 120 Hz

Lead Spacing:

-

Height - Seated (Max):

0.425" (10.80mm)

Mounting Type:

Surface Mount

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8532.22.0020

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:


EAR99

ALUMINUM ELECTROLYTIC CAPACITORS

UCZ Chip Type, High Reliability.
Low temperature ESR specification.



- Chip type, high temperature range, for +125°C use.
- Added ESR specification after the test at -40°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 Qualified. Please contact us for details.

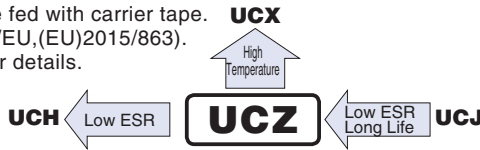

Specifications



Item	Performance Characteristics																		
Category Temperature Range	-40 to +125°C																		
Rated Voltage Range	10 to 100V																		
Rated Capacitance Range	10 to 3300μF																		
Capacitance Tolerance	±20% at 120Hz, 20°C																		
Leakage Current ※	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV (μA).																		
Tangent of loss angle (tan δ)	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>tan δ (max.)</td> <td>0.30</td> <td>0.23</td> <td>0.18</td> <td>0.16</td> <td>0.16</td> <td>0.12</td> <td>0.12</td> <td>0.10</td> </tr> </table>	Rated voltage (V)	10	16	25	35	50	63	80	100	tan δ (max.)	0.30	0.23	0.18	0.16	0.16	0.12	0.12	0.10
	Rated voltage (V)	10	16	25	35	50	63	80	100										
tan δ (max.)	0.30	0.23	0.18	0.16	0.16	0.12	0.12	0.10											
For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF. (φ12.5 to φ18)																			
Stability at Low Temperature	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>Impedance ratio (max.)</td> <td>Z(-40°C) / Z(+20°C)</td> <td>12</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table>	Rated voltage (V)	10	16	25	35	50	63	80	100	Impedance ratio (max.)	Z(-40°C) / Z(+20°C)	12	8	6	4	4	3	3
	Rated voltage (V)	10	16	25	35	50	63	80	100										
Impedance ratio (max.)	Z(-40°C) / Z(+20°C)	12	8	6	4	4	3	3											
Measurement frequency : 120Hz																			
Endurance	After continuous application of rated voltage at 125°C and then restoring down to 20°C, the readings of measurements shall meet below.																		
	<table border="1"> <tr> <td>Case size</td> <td>φ6.3 × 5.8L</td> <td>φ6.3 × 7.7L</td> <td>φ8 to φ12.5</td> <td>φ16.18 × 16.5L</td> <td>φ16.18 × 21.5L</td> </tr> <tr> <td>Endurance time</td> <td>1000hrs.</td> <td>2000hrs.</td> <td>3000hrs.</td> <td>3500hrs.</td> <td>4000hrs.</td> </tr> </table>	Case size	φ6.3 × 5.8L	φ6.3 × 7.7L	φ8 to φ12.5	φ16.18 × 16.5L	φ16.18 × 21.5L	Endurance time	1000hrs.	2000hrs.	3000hrs.	3500hrs.	4000hrs.						
	Case size	φ6.3 × 5.8L	φ6.3 × 7.7L	φ8 to φ12.5	φ16.18 × 16.5L	φ16.18 × 21.5L													
	Endurance time	1000hrs.	2000hrs.	3000hrs.	3500hrs.	4000hrs.													
<table border="1"> <tr> <td>Capacitance change</td> <td>Within ±30% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>300% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>	Capacitance change	Within ±30% of the initial capacitance value	tan δ	300% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value													
Capacitance change	Within ±30% of the initial capacitance value																		
tan δ	300% or less than the initial specified value																		
Leakage current	Less than or equal to the initial specified value																		
Shelf Life																			
Resistance to soldering heat	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																		
	<table border="1"> <tr> <td>Capacitance change</td> <td>Within ±10% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>Less than or equal to the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>	Capacitance change	Within ±10% of the initial capacitance value	tan δ	Less than or equal to the initial specified value	Leakage current	Less than or equal to the initial specified value												
Capacitance change	Within ±10% of the initial capacitance value																		
tan δ	Less than or equal to the initial specified value																		
Leakage current	Less than or equal to the initial specified value																		
Marking	Black print on the case top.																		

Chip Type

※ I : Leakage Current (μA), C : Rated Capacitance (μF), V : Rated Voltage (V)



(φ 6.3) 【Standard】 ※ φ6.3 × 5.8L : The vibration structure-resistant product can't support.

(φ 6.3) 【Vibration Resistance】

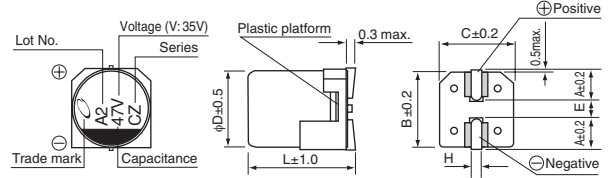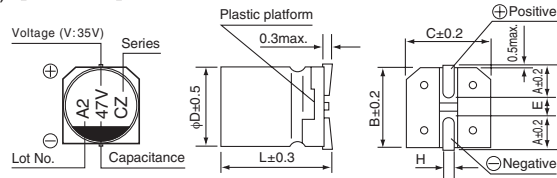



(φ 8, φ10) 【Standard】

(φ 8, φ10) 【Vibration Resistance】

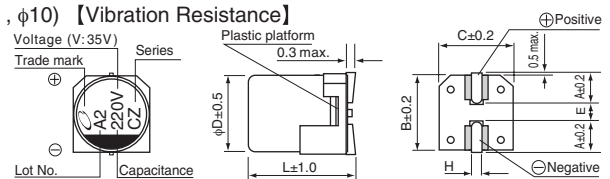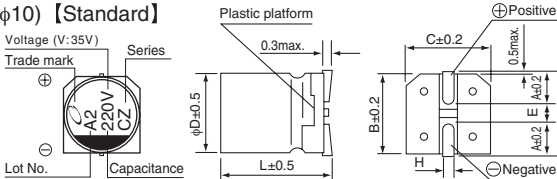

(φ12.5 to φ18) 【Standard】

(φ12.5 to φ18) 【Vibration Resistance】

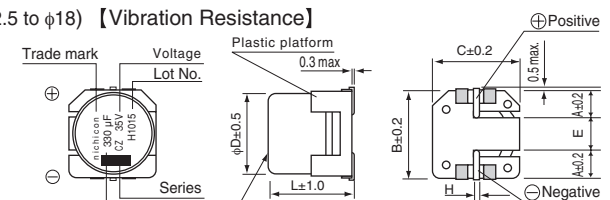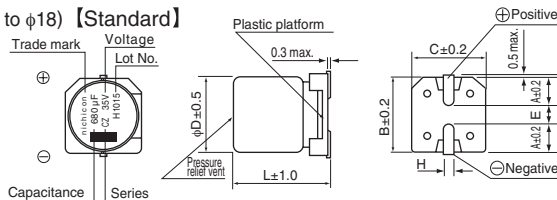


Standard (mm)							Vibration Resistance (mm)					
φD×L	6.3×5.8	6.3×7.7	8×10	10×10	12.5×13.5	16×16.5, 21.5	φ6.3	8×10	10×10	φ12.5	φ16	φ18
A	2.4	2.4	2.9	3.2	5.15	5.65	2.4	2.9	3.2	4.8	5.4	6.4
B	6.6	6.6	8.3	10.3	13.6	17.1	6.6	8.3	10.3	13.6	17.1	19.1
C	6.6	6.6	8.3	10.3	13.6	17.1	6.6	8.3	10.3	13.6	17.1	19.1
E	2.2	2.2	3.1	4.5	(3.3)	(5.8)	2.2	3.1	4.5	(4.0)	(6.3)	(6.3)
L	5.8	7.7	10	10	13.5	16.5, 21.5	7.7	10	10	13.5	16.5, 21.5	16.5, 21.5
H	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1	1.0 to 1.4	1.0 to 1.4	0.5 to 0.8	1.1 to 1.5	1.1 to 1.5	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4

Voltage	Frequency coefficient of rated ripple current										
	V	10	16	25	35	50	63	80	100	Code	
Code	A	C	E	V	H	J	K	2A			
Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more						
Coefficient	0.35	0.50	0.64	0.83	1.00						

● Dimension table in next page.

Type numbering system (Example : 35V 47μF)

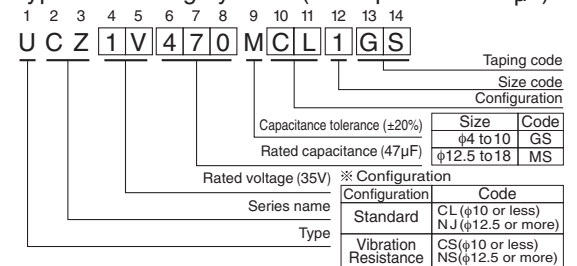

Design, specifications are subject to change without notice.

ALUMINUM ELECTROLYTIC CAPACITORS

UCZ

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μ F)	Case Size ϕ D \times L (mm)	tan δ	Leakage Current (μ A) (at 20°C after 2 minutes)	ESR (Ω) max. (20°C/−40°C/100kHz)			Rated Ripple (mArms) (125°C/100kHz)	Part Number
					Initial 20°C	Initial −40°C	after endurance test −40°C ※		
10 (1A)	220	8 \times 10	0.30	22	0.20	3.00	4.5	270	UCZ1A221M□□1GS
	330	8 \times 10	0.30	33	0.20	3.00	4.5	270	UCZ1A331M□□6GS
	330	10 \times 10	0.30	33	0.15	2.00	3.5	500	UCZ1A331M□□1GS
	470	10 \times 10	0.30	47	0.15	2.00	3.5	500	UCZ1A471M□□1GS
16 (1C)	47	6.3 \times 5.8	0.23	7.52	1.60	24.00	—	69	UCZ1C470MCL1GS
	100	6.3 \times 7.7	0.23	16	0.45	5.00	40	197	UCZ1C101M□□6GS
	100	8 \times 10	0.23	16	0.20	3.00	4.5	270	UCZ1C101M□□1GS
	220	8 \times 10	0.23	35.2	0.20	3.00	4.5	270	UCZ1C221M□□1GS
	330	10 \times 10	0.23	52.8	0.15	2.00	3.5	500	UCZ1C331M□□1GS
	470	10 \times 10	0.23	75.2	0.15	2.00	3.5	500	UCZ1C471M□□1GS
25 (1E)	33	6.3 \times 5.8	0.18	8.25	1.60	24.00	—	69	UCZ1E330MCL1GS
	100	6.3 \times 7.7	0.18	25	0.45	5.00	40	197	UCZ1E101M□□6GS
	100	8 \times 10	0.18	25	0.20	3.00	4.5	270	UCZ1E101M□□1GS
	220	8 \times 10	0.18	55	0.20	3.00	4.5	270	UCZ1E221M□□6GS
	220	10 \times 10	0.18	55	0.15	2.00	3.5	500	UCZ1E221M□□1GS
	330	10 \times 10	0.18	82.5	0.15	2.00	3.5	500	UCZ1E331M□□1GS
	820	12.5 \times 13.5	0.18	205	0.060	0.40	3	1700	UCZ1E821M□□1MS
	1000	12.5 \times 13.5	0.18	250	0.060	0.40	3	1700	UCZ1E102M□□1MS
	1200	16 \times 16.5	0.18	300	0.047	0.28	1.4	1700	UCZ1E122M□□1MS
	1600	16 \times 16.5	0.18	400	0.047	0.28	1.4	2400	UCZ1E162M□□1MS
	2200	18 \times 16.5	0.20	550	0.045	0.23	1.3	2600	UCZ1E222M□□1MS
	2700	16 \times 21.5	0.20	675	0.034	0.20	0.6	3000	UCZ1E272M□□1MS
	3300	18 \times 21.5	0.22	825	0.032	0.16	0.5	3250	UCZ1E332M□□1MS
35 (1V)	10	6.3 \times 5.8	0.16	3.5	1.60	24.00	—	69	UCZ1V100MCL1GS
	22	6.3 \times 5.8	0.16	7.7	1.60	24.00	—	69	UCZ1V220MCL1GS
	33	6.3 \times 7.7	0.16	11.55	0.45	5.00	40	197	UCZ1V330M□□1GS
	47	6.3 \times 7.7	0.16	16.45	0.45	5.00	40	197	UCZ1V470M□□6GS
	47	8 \times 10	0.16	16.45	0.20	3.00	4.5	270	UCZ1V470M□□1GS
	68	8 \times 10	0.16	23.8	0.20	3.00	4.5	270	UCZ1V680M□□1GS
	100	8 \times 10	0.16	35	0.20	3.00	4.5	270	UCZ1V101M□□1GS
	220	10 \times 10	0.16	77	0.15	2.00	3.5	500	UCZ1V221M□□1GS
	470	12.5 \times 13.5	0.16	164.5	0.060	0.40	3.0	1700	UCZ1V471M□□1MS
	560	12.5 \times 13.5	0.16	196	0.060	0.40	3.0	1700	UCZ1V561M□□1MS
	680	12.5 \times 13.5	0.16	238	0.060	0.40	3.0	1700	UCZ1V681M□□1MS
	820	16 \times 16.5	0.16	287	0.047	0.28	1.4	2400	UCZ1V821M□□1MS
	1000	16 \times 16.5	0.16	350	0.047	0.28	1.4	2400	UCZ1V102M□□1MS
	1200	18 \times 16.5	0.16	420	0.045	0.28	1.4	2600	UCZ1V122M□□1MS
	1400	18 \times 16.5	0.16	490	0.045	0.28	1.4	2600	UCZ1V142M□□1MS
	1600	16 \times 21.5	0.16	560	0.034	0.20	0.6	3000	UCZ1V162M□□1MS
2200	18 \times 21.5	0.18	770	0.032	0.16	0.5	3250	UCZ1V222M□□1MS	
50 (1H)	10	6.3 \times 5.8	0.16	5	2.80	42.00	—	51	UCZ1H100MCL1GS
	22	6.3 \times 7.7	0.16	11	0.50	5.00	40	197	UCZ1H220M□□1GS
	33	6.3 \times 7.7	0.16	16.5	0.50	5.00	40	197	UCZ1H330M□□6GS
	33	8 \times 10	0.16	16.5	0.25	3.50	6	270	UCZ1H330M□□1GS
	47	6.3 \times 7.7	0.16	23.5	0.50	5.00	40	197	UCZ1H470M□□6GS
	47	8 \times 10	0.16	23.5	0.25	3.50	6	270	UCZ1H470M□□1GS
	100	10 \times 10	0.16	50	0.20	2.50	4.5	500	UCZ1H101M□□1GS
	390	12.5 \times 13.5	0.16	195	0.10	0.44	4.0	1300	UCZ1H391M□□1MS
	470	16 \times 16.5	0.16	235	0.080	0.34	2.6	2000	UCZ1H471M□□1MS
	560	16 \times 16.5	0.16	280	0.080	0.34	2.6	2000	UCZ1H561M□□1MS
	680	18 \times 16.5	0.16	340	0.078	0.32	2.6	2100	UCZ1H681M□□1MS
	820	18 \times 16.5	0.16	410	0.078	0.32	2.6	2100	UCZ1H821M□□1MS
	1000	16 \times 21.5	0.16	500	0.040	0.22	1.5	2800	UCZ1H102M□□1MS
	1200	18 \times 21.5	0.16	600	0.038	0.20	1.5	2900	UCZ1H122M□□1MS

□□ : Enter the appropriate configuration code.

Design, specifications are subject to change without notice.

NICHICON CORPORATION

ALUMINUM ELECTROLYTIC CAPACITORS

UCZ

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μ F)	Case Size ϕ D \times L (mm)	tan δ	Leakage Current (μ A) (at 20°C after 2 minutes)	ESR (Ω) max. (20°C/−40°C/100kHz)			Rated Ripple (mArms) (125°C/100kHz)	Part Number
					Initial 20°C	Initial −40°C	after endurance test −40°C ※		
63 (1J)	10	6.3 \times 7.7	0.12	6.3	2.00	100.00	—	60	UCZ1J100M□□1GS
	22	8 \times 10	0.12	13.86	0.70	35.00	—	100	UCZ1J220M□□1GS
	33	8 \times 10	0.12	20.79	0.70	35.00	—	100	UCZ1J330M□□6GS
	33	10 \times 10	0.12	20.79	0.50	25.00	—	170	UCZ1J330M□□1GS
	47	8 \times 10	0.12	29.61	0.70	35.00	—	100	UCZ1J470M□□6GS
	47	10 \times 10	0.12	29.61	0.50	25.00	—	170	UCZ1J470M□□1GS
	150	12.5 \times 13.5	0.12	94.5	0.20	1.30	14	1000	UCZ1J151M□□1MS
	180	12.5 \times 13.5	0.12	113.4	0.20	1.30	14	1000	UCZ1J181M□□1MS
	220	12.5 \times 13.5	0.12	138.6	0.20	1.30	14	1000	UCZ1J221M□□1MS
	390	16 \times 16.5	0.12	245.7	0.13	0.90	4.8	1900	UCZ1J391M□□1MS
	470	18 \times 16.5	0.12	296.1	0.11	0.82	3.9	2000	UCZ1J471M□□1MS
	560	16 \times 21.5	0.12	352.8	0.070	0.46	2.0	2500	UCZ1J561M□□1MS
750	18 \times 21.5	0.12	472.5	0.068	0.44	1.8	2600	UCZ1J751M□□1MS	
80 (1K)	10	8 \times 10	0.12	8	0.75	50.00	—	70	UCZ1K100M□□1GS
	22	8 \times 10	0.12	17.6	0.75	50.00	—	70	UCZ1K220M□□6GS
	22	10 \times 10	0.12	17.6	0.55	35.00	—	115	UCZ1K220M□□1GS
	33	8 \times 10	0.12	26.4	0.75	50.00	—	70	UCZ1K330M□□6GS
	33	10 \times 10	0.12	26.4	0.55	35.00	—	115	UCZ1K330M□□1GS
	47	10 \times 10	0.12	37.6	0.55	35.00	—	115	UCZ1K470M□□1GS
	150	12.5 \times 13.5	0.12	120	0.28	1.90	14	700	UCZ1K151M□□1MS
	270	16 \times 16.5	0.12	216	0.19	1.40	4.8	1000	UCZ1K271M□□1MS
	330	18 \times 16.5	0.12	264	0.17	1.10	3.9	1100	UCZ1K331M□□1MS
	390	16 \times 21.5	0.12	312	0.12	0.80	2.6	1600	UCZ1K391M□□1MS
	520	18 \times 21.5	0.12	416	0.11	0.70	2.4	1700	UCZ1K521M□□1MS
100 (2A)	10	8 \times 10	0.10	10	0.75	50.00	—	70	UCZ2A100M□□1GS
	22	8 \times 10	0.10	22	0.75	50.00	—	70	UCZ2A220M□□6GS
	22	10 \times 10	0.10	22	0.55	35.00	—	115	UCZ2A220M□□1GS
	33	10 \times 10	0.10	33	0.55	35.00	—	115	UCZ2A330M□□1GS
	82	12.5 \times 13.5	0.10	82	0.28	1.90	22	700	UCZ2A820M□□1MS
	150	16 \times 16.5	0.10	150	0.19	1.40	4.8	1000	UCZ2A151M□□1MS
	180	18 \times 16.5	0.10	180	0.17	1.10	3.9	1100	UCZ2A181M□□1MS
	220	16 \times 21.5	0.10	220	0.12	0.80	2.6	1600	UCZ2A221M□□1MS
300	18 \times 21.5	0.10	300	0.11	0.70	2.4	1700	UCZ2A301M□□1MS	

□□ : Enter the appropriate configuration code.

※ Guaranteed time of ESR after endurance test

Size	Guaranteed time
ϕ 6.3 \times 5.8L	—
ϕ 6.3 \times 7.7L, ϕ 8 \times 10L	10 to 50V 2000hrs.
ϕ 10 \times 10L	63 to 100V —
ϕ 12.5	2000hrs.
ϕ 16, 18 \times 16.5L	2000hrs.
ϕ 16, 18 \times 21.5L	3000hrs.

Design, specifications are subject to change without notice.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.