


SPC5673KFF0VMM1R Datasheet

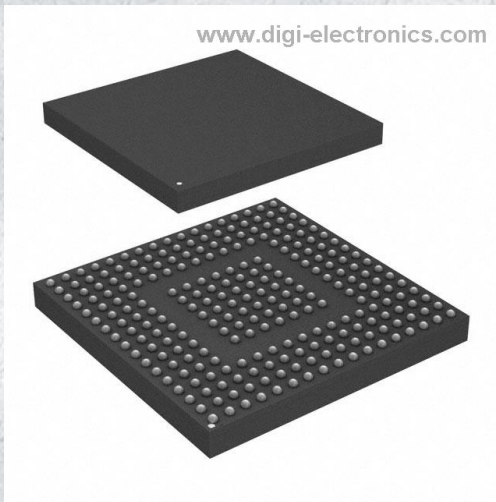

www.digi-electronics.com

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	SPC5673KFF0VMM1R-DG
Manufacturer	NXP USA Inc.
Manufacturer Product Number	SPC5673KFF0VMM1R
Description	IC MCU 32BIT 1MB FLASH 257MAPBGA
Detailed Description	e200z7d MPC56xx Qorivva Microcontroller IC 32-Bit Dual-Core 150MHz 1MB (1M x 8) FLASH 257-LFBGA (14x14)

This model SPC5673KFF0VMM1R is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

SPC5673KFF0VMM1R

Series:

MPC56xx Qorivva

DiGi-Electronics Programmable:

Not Verified

Core Size:

32-Bit Dual-Core

Connectivity:

CANbus, EBI/EMI, Ethernet, FlexRay, I2C, LINbus, SPI

Program Memory Size:

1MB (1M x 8)

EEPROM Size:

64K x 8

Voltage - Supply (Vcc/Vdd):

1.14V ~ 5.5V

Oscillator Type:

Internal

Mounting Type:

Surface Mount

Package / Case:

257-LFBGA

Manufacturer:

NXP USA Inc.

Product Status:

Obsolete

Core Processor:

e200z7d

Speed:

150MHz

Peripherals:

DMA, POR, PWM, WDT

Program Memory Type:

FLASH

RAM Size:

256K x 8

Data Converters:

A/D 22x12b

Operating Temperature:

-40°C ~ 105°C (TA)

Supplier Device Package:

257-LFBGA (14x14)

Base Product Number:

SPC5673

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8542.31.0001

Moisture Sensitivity Level (MSL):

3 (168 Hours)

ECCN:

3A991A2



Qorivva 32-bit MCUs

Qorivva MPC567xK Family



Automotive safety and chassis control applications

Overview

The MPC5675K is a Qorivva 32-bit embedded MCU designed for automotive safety and chassis applications such as advanced driver assistance systems (ADAS) with radar, CMOS imaging, LIDAR and ultrasonic sensing functionality. The MPC567xK MCU is part of the SafeAssure program, which is designed to help system manufacturers more easily achieve compliance with functional safety standards. Part of the MPC5500/5600 family, the MPC5675K contains the Book E compliant core built on Power Architecture® technology with variable length encoding (VLE). This core complies with the Power Architecture embedded category, and is 100 percent user mode compatible with the original PowerPC user instruction set architecture. It offers system performance up to four times that of its MPC5561 predecessor, while bringing you the reliability and familiarity of proven Power Architecture technology.

All devices in this family are built around a dual-core safety platform with an innovative safety concept targeting systems with ISO 26262, ASIL-D safety integrity levels. In order to minimize additional software and module level features to reach this target,

on-chip redundancy is offered for the critical components of the MCU (CPU core, DMA controller, interrupt controller, crossbar bus system, memory protection unit, flash memory and RAM controllers, peripheral bus bridge, system timers and watchdog timer). Lock step redundancy checking units are implemented at each output of this sphere of replication (SoR).

A comprehensive suite of hardware and software development tools is available to help simplify and speed system design. Development support is available from leading tool vendors, providing compilers, debuggers and simulation development environments.

Features

The Qorivva MPC567xK features a dual-core 180 MHz Qorivva MCU, with up to 2 MB flash and 512 KB SRAM, plus a feature set optimized for ADAS and chassis control applications.

The ADAS market is growing fast. As historically premium applications such as RADAR and camera-based assistance systems proliferate into the mid range, there is a need to reduce system cost.

MPC567xK has a decoupled parallel mode where the two e200 cores may be separated in order to run parallel processing tasks. Together

with up to 512 KB SRAM and 2 MB flash, the MPC567xK provides enough data handling headroom to manage these applications. Additional peripherals such as quad ADC, DDR, PDI and FEC help at the system level.

Additionally, there is a trend towards safety assessment for ADAS systems. The safety architecture of the Qorivva MPC567xK assists with assessment and a reduction of common faults.

Development Tools

Compilers

- Freescale CodeWarrior IDE (freescale.com/CodeWarrior)
- Green Hills Software
- Wind River Diab

Debuggers

- P&E Micro
- Lauterbach
- Green Hills Software

Runtime Software

- Flash and FEE drivers
- Software core self test
- AUTOSAR MCU

Abstraction Layer

- AUTOSAR OS

Specifications

Core

- Up to 180 MHz Power Architecture ISA dual e200z7 core
- 16 KB D cache and 16 KB I cache
- Safety enhanced cores + SPE2 + VLE + MMU
- Dual parallel or lock step configuration + HW/SW monitoring

Memory

- Up to 2 MB flash with ECC
- 4 x 16 KB EEPROM flash with ECC
- Up to 512 KB SRAM with ECC
- Dual crossbar with MPUs

I/O

- 4 x FlexCAN (32 message buffers each)
- 1 x FlexRay (64 msg. buffers)
- 1 x Fast Ethernet controller
- 4 x LINFlex (SCI)
- 3 x I²C
- 3 x DSPI
- 3 x FlexPWM (3 x 12 channels)
- 3 x eTimer (3 x 6 channels)
- Quad ADC (11 channels each, 12-bit)
- 2 x CTU
- External bus interface (slave only)
- Parallel digital interface
- MDDR interface

SafeAssure Program: Functional Safety. Simplified

Freescale's SafeAssure functional safety program is designed to help system manufacturers more easily achieve system compliance with functional safety standards: International Standards Organization (ISO) 26262 and 61508. The program highlights Freescale solutions—hardware and software—that are optimally designed to support functional safety implementations and come with a rich set of enablement collateral.

For more information, visit freescale.com/SafeAssure.

Features		MPC5673K	MPC5674K	MPC5675K	
CPU	Type	2xe200z7d (SoR) in lock-step or decoupled operation			
	Architecture	Harvard			
	Execution speed	0–150 MHz (+2% FM)	0–180 MHz (+2% FM)	0–180 MHz (+2% FM)	
	Nominal platform frequency (in 1:1, 1:2, and 1:3 modes)	0–75 MHz (+2% FM)	0–90 MHz (+2% FM)	0–90 MHz (+2% FM)	
	MMU	64 entries (SoR)			
	Instruction set PPC	Yes			
	Instruction set VLE	Yes			
	Instruction cache	16 KB, 4-way with EDC (SoR)			
	Data cache	16 KB, 4-way with EDC (SoR)			
	MPU	Yes (SoR)			
Buses	Core bus	32-bit address, 64-bit data			
	Internal periphery bus	32-bit address, 32-bit data			
XBAR	Master x slave ports	Yes (SoR)			
Memory	Static RAM	256 KB (ECC)	384 KB (ECC)	512 KB (ECC)	
	Code flash memory	1 MB	1.5 MB	2 MB	
	Data flash memory	64 KB2			
Modules	Analog-to-digital converter	257 pin pkg: 4 x 12-bit (22 external channels), 473 pin pkg: 4 x 12-bit (up to 34 external channels)			
	CRC unit	Two (three contexts each)			
	Cross triggering unit	Two modules			
	Deserial serial peripheral interface	Two modules (three chip selects)	Three modules (three chip selects)		
	Digital I/Os	≥16			
	DRAM controller	No	Yes		
	Enhanced direct memory access	Two modules, 32 channels each			
	eTimer	Three modules, six channels each			
	External bus interface	One module, 16-bit data + address or 32-bit data with address bus muxed			
	Fast ethernet controller	One module			
	Fault collection and control unit	One module			
	FlexCAN	Four modules (32 message buffers each)			
	FlexPWM	Three modules (each 4 x 3 channels)			
	FlexRay	Optional			
	I ² C	Two modules	Three modules		
	Interrupt controller	Yes (SoR)			
	LINFlex	Three modules	Four modules		
	Parallel data interface	One module			
	Periodic interrupt timer	One module, four channels			
	Software watchdog timer	Yes (SoR)			
	System timer module	Yes (SoR)			
	Temperature sensor	One module			
	Wakeup unit	Yes			
	Crossbar switch	Three modules, two are user-configurable			
	Clocking	Clock monitor unit	Three modules		
		Clock output	Two modules		
		Frequency-modulated phase-locked loop	Two modules (system and auxiliary)		
IRCOSC—16 MHz		One			
XOSC 4 MHz–40 MHz		One			
Supply	Power management unit	Yes			
	1.2V low-voltage detector (LVD12)	One			
	1.2V high-voltage detector (HVD12)	One			
	2.7V low-voltage detector (LVD27)	Four			
Debug	Nexus	Class 3+ (for cores and SRAM ports)			
Packages	MAPBGA	257 pins, 473 pins			
Temperature	Ambient	See the TA recommended operating condition in the device data sheet			

For more information, visit freescale.com/Qorivva

Freescale, the Freescale logo and Qorivva are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. SafeAssure and the SafeAssure logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners. The Power Architecture and Power.org word marks and the Power and Power.org logos and related marks are trademarks and service marks licensed by Power.org. © Freescale Semiconductor, Inc. 2012. All rights reserved.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.