

# G3VM-61D1(TR) Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	G3VM-61D1(TR)-DG
Manufacturer	<a href="#">Omron Electronics Inc-EMC Div</a>
Manufacturer Product Number	G3VM-61D1(TR)
Description	SSR RELAY SPST-NO 500MA 0-60V
Detailed Description	Solid State SPST-NO (1 Form A) 4-SMD (0.300", 7.62 mm)

This model G3VM-61D1(TR) is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

G3VM-61D1(TR)

Series:

G3VM

Mounting Type:

Surface Mount

Output Type:

AC, DC

Voltage - Load:

0 V ~ 60 V

On-State Resistance (Max):

2 Ohms

Package / Case:

4-SMD (0.300", 7.62mm)

Base Product Number:

G3VM

Manufacturer:

Omron Electronics Inc-EMC Div

Product Status:

Obsolete

Circuit:

SPST-NO (1 Form A)

Voltage - Input:

1.15VDC

Load Current:

500 mA

Termination Style:

Gull Wing

Supplier Device Package:

4-SMT

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8536.49.0055

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99


# G3VM-61A1/D1

## MOS FET Relays

### Compact, General-purpose, Analog switching MOS FET Relays, with Dielectric Strength of 2.5 kVAC between I/O Using Optical Isolation.



- Upgraded G3VM-61A/D Series.
- Switches minute analog signals.
- Leakage current of 1  $\mu$ A max. when output relay is open.





Note: The actual product is marked differently from the image shown here.

RoHS compliant

#### Application Examples

- Test & Measurement equipment
- Security equipment
- Amusement equipment

#### Terminal Arrangement/Internal Connections



Note: The actual product is marked differently from the image shown here.

\* The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

#### List of Models

Package type	Contact form	Terminals	Load voltage (peak value) *	Model	Minimum package quantity	
					Number per tube	Number per tape and reel
DIP4	1a (SPST-NO)	PCB Terminals	60 V	G3VM-61A1	100	-
		Surface-mounting Terminals		G3VM-61D1		
				G3VM-61D1(TR)	-	1,500

\* The AC peak and DC value are given for the load voltage.

#### Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement conditions	
Input	LED forward current	IF	50	mA	
	Repetitive peak LED forward current	IFP	1	A	100 $\mu$ s pulses, 100 pps
	LED forward current reduction rate	$\Delta I_F / ^\circ C$	-0.5	mA/ $^\circ C$	Ta $\geq$ 25°C
	LED reverse voltage	VR	5	V	
	Connection temperature	TJ	125	$^\circ C$	
Output	Load voltage (AC peak/DC)	V <sub>OFF</sub>	60	V	
	Continuous load current (AC peak/DC)	Io	500	mA	
	ON current reduction rate	$\Delta I_o / ^\circ C$	-5.0	mA/ $^\circ C$	Ta $\geq$ 25°C
	Connection temperature	TJ	125	$^\circ C$	
Dielectric strength between I/O (See note 1.)	V <sub>I-O</sub>	2500	V <sub>rms</sub>	AC for 1 min	
Ambient operating temperature	Ta	-40 to +85	$^\circ C$	With no icing or condensation	
Ambient storage temperature	T <sub>stg</sub>	-55 to +125	$^\circ C$	With no icing or condensation	
Soldering temperature	-	260	$^\circ C$	10 s	

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

#### Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions	
Input	LED forward voltage	V <sub>F</sub>	1.0	1.15	1.3	V	IF = 10 mA
	Reverse current	IR	-	-	10	$\mu$ A	VR = 5 V
	Capacity between terminals	CT	-	30	-	pF	V = 0, f = 1 MHz
	Trigger LED forward current	IFT	-	1.6	3	mA	Io = 500 mA
Output	Maximum resistance with output ON	R <sub>ON</sub>	-	1	2	$\Omega$	IF = 5 mA, Io = 500 mA
	Current leakage when the relay is open	I <sub>LEAK</sub>	-	-	1.0	$\mu$ A	V <sub>OFF</sub> = 60 V
	Capacity between terminals	C <sub>OFF</sub>	-	130	-	pF	V = 0, f = 1 MHz
	Capacity between I/O terminals	C <sub>I-O</sub>	-	0.8	-	pF	f = 1 MHz, Vs = 0 V
	Insulation resistance between I/O terminals	R <sub>I-O</sub>	1000	-	-	M $\Omega$	V <sub>I-O</sub> = 500 VDC, RoH $\leq$ 60%
Turn-ON time	t <sub>ON</sub>	-	0.8	2.0	ms	IF = 5 mA, RL = 200 $\Omega$ , V <sub>DD</sub> = 20 V (See note 2.)	
Turn-OFF time	t <sub>OFF</sub>	-	0.1	0.5	ms		

Note: 2. Turn-ON and Turn-OFF Times



# G3VM-61A1/D1

## MOS FET Relays


### Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	$V_{DD}$	-	-	48	V
Operating LED forward current	$I_F$	5	7.5	25	mA
Continuous load current (AC peak/DC)	$I_O$	-	-	500	mA
Ambient operating temperature	$T_a$	-20	-	65	°C

### Engineering Data


LED forward current vs. Ambient temperature

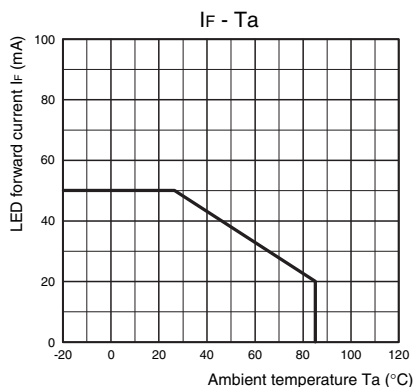


Continuous load current vs. Ambient temperature

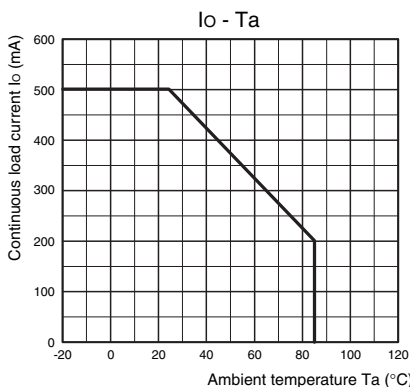


LED forward current vs. LED forward voltage

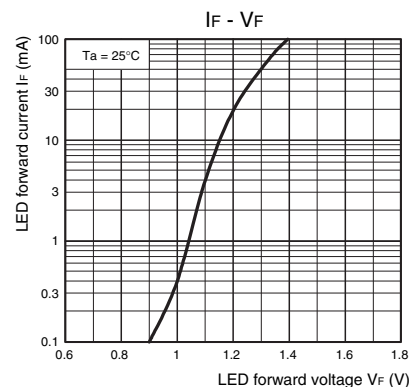


Continuous load current vs. On-state voltage

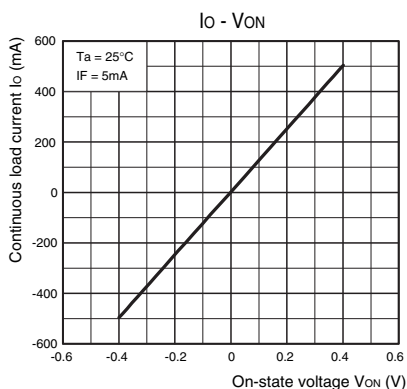


On-state resistance vs. Ambient temperature

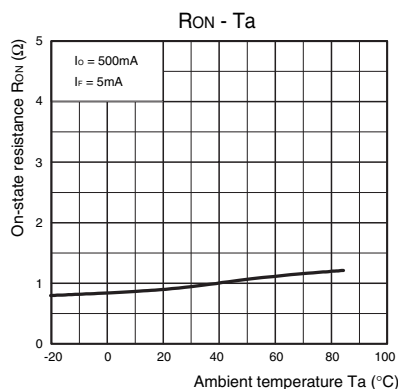


Trigger LED forward current vs. Ambient temperature

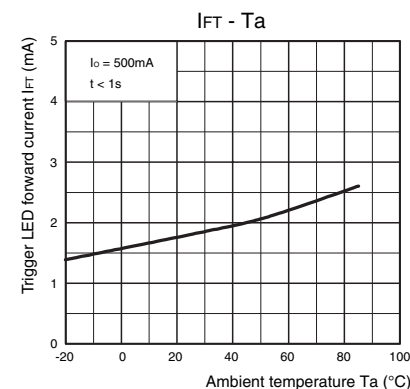


Turn ON, Turn OFF time vs. LED forward current

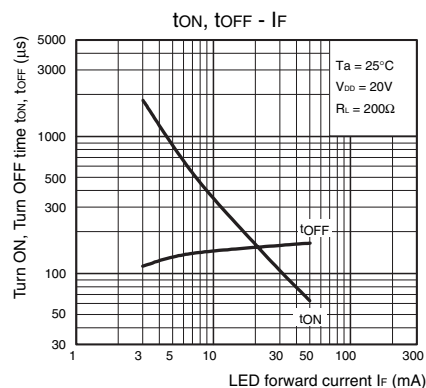

Turn ON, Turn OFF time vs. Ambient temperature

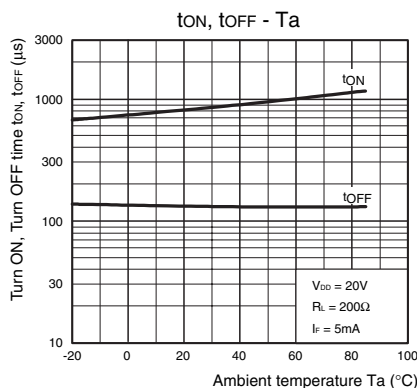

Current leakage vs. Ambient temperature

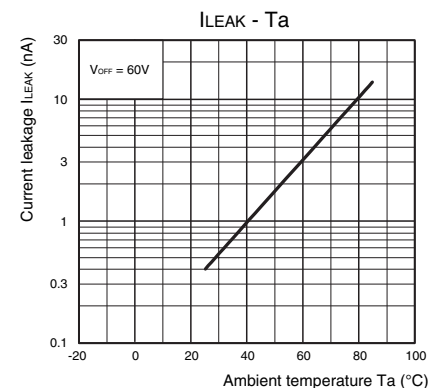

### Safety Precautions

- Refer to "Common Precautions" for all G3VM models.


# Appearance/Dimensions

## DIP4 type

### ■ Appearance

#### DIP (Dual Inline Package)

DIP4

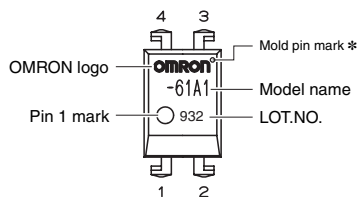

Note: The actual product is marked differently from the image shown here.

\* The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.


### ■ Dimensions

(Unit:mm)




#### PCB Terminals

Weight: 0.25 g

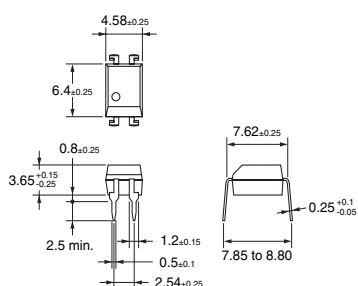


#### Surface-mounting Terminals

Weight: 0.25 g




#### PCB Dimensions (BOTTOM VIEW)



#### Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

## OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: [www.omron.com/ecb](http://www.omron.com/ecb)
 Cat. No. **K143-E1-01**  
0412(0412)(O)

