


EDSTLZ951/2 Datasheet

www.digi-electronics.com

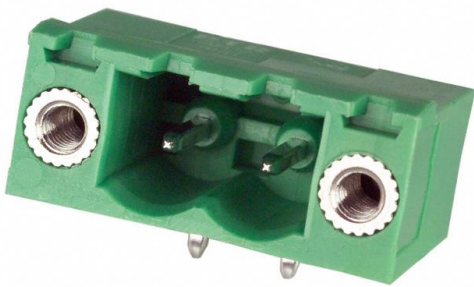


<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	EDSTLZ951/2-DG
Manufacturer	On Shore Technology Inc.
Manufacturer Product Number	EDSTLZ951/2
Description	TERM BLOCK HDR 2POS 90DEG 5.08MM
Detailed Description	2 Position Terminal Block Header, Male Pins, Shrouded (4 Side) 0.200" (5.08mm) 90°, Right Angle Solder

This model EDSTLZ951/2 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.


Purchase and inquiry

Manufacturer Product Number:	EDSTLZ951/2	Manufacturer:	On Shore Technology Inc.
Series:	EDSTLZ951	Product Status:	Active
Type:	Header, Male Pins, Shrouded (4 Side)	Number of Positions:	2
Positions Per Level:	2	Number of Levels:	1
Pitch:	0.200" (5.08mm)	Header Orientation:	90°, Right Angle
Plug Wire Entry:	-	Termination Style:	-
Mounting Type:	Solder	Current - IEC:	-
Voltage - UL:	300 V	Wire Gauge or Range - AWG:	-
Wire Gauge or Range - mm ² :	-	Color:	-
Operating Temperature:	-30°C ~ 105°C	Contact Mating Finish:	-
Features:	-	Material Flammability Rating:	UL94 V-0
Ingress Protection:	-	Screw Size:	-
Torque - Screw:	-	Wire Strip Length:	-
Contact Material:	-	Housing Material:	Polyamide (PA), Nylon
Contact Tail Length:	0.138" (3.50mm)	Insulation Height:	0.138" (3.50mm)
Base Product Number:	EDSTL		

Environmental & Export classification

RoHS Status:	ROHS3 Compliant	Moisture Sensitivity Level (MSL):	1 (Unlimited)
REACH Status:	REACH Unaffected	ECCN:	EAR99
HTSUS:	8536.69.4040		

EDSTLZ 951

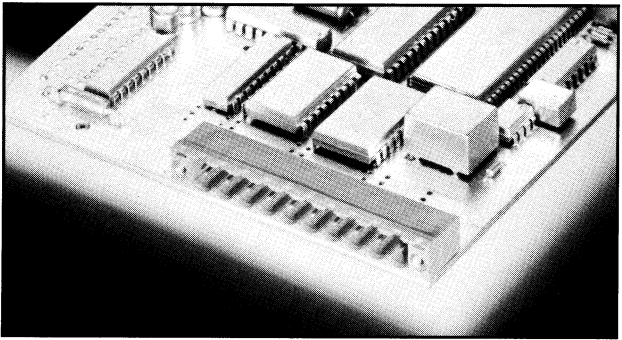

2-10 poles, Spacing 5.08 mm
insert required no. of poles **
How to order see page 6

Ratings:

*Approvals pending



UL1059



CSA 22.2 No. 158



DIN VDE 0627

Rated Voltage

250 VB

300 VB

250 V

Rated Current

15 A

16 A

12 A (T60)

Test Voltage

2.21 kV

Dimensions

Spacing

5.08 mm

PCB Hole Diameter

1.4 mm

Materials

Insulating Material

PA

Flammability Class

UL94 V-0

Temperature Range


-30°C/+105°C

Contact Pin

Cu

Color

Green

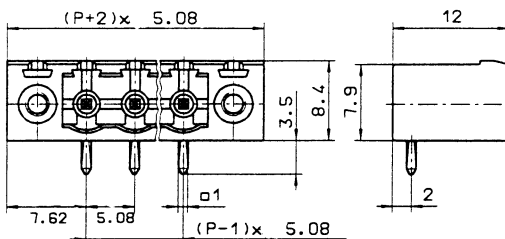

P = No. of Poles

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.