


# ABM8W-19.7079MHZ-4-B2U-T3 Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)

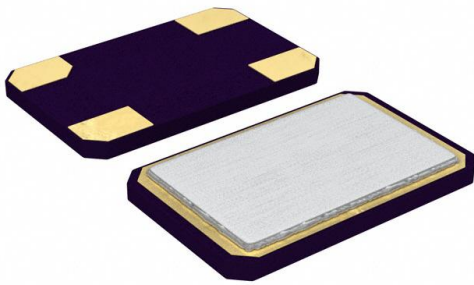

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	ABM8W-19.7079MHZ-4-B2U-T3-DG
Manufacturer	<a href="#">Abracon LLC</a>
Manufacturer Product Number	ABM8W-19.7079MHZ-4-B2U-T3
Description	CRYSTAL 19.7079MHZ 4PF SMD
Detailed Description	19.7079 MHz $\pm$ 20ppm Crystal 4pF 70 Ohms 4-SMD, No Lead

This model ABM8W-19.7079MHZ-4-B2U-T3 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

ABM8W-19.7079MHZ-4-B2U-T3

Series:

ABM8W

Type:

MHz Crystal

Frequency Stability:

±10ppm

Load Capacitance:

4pF

Operating Mode:

Fundamental

Ratings:

-

Package / Case:

4-SMD, No Lead

Height - Seated (Max):

0.030" (0.75mm)

Manufacturer:

Abracon LLC

Product Status:

Active

Frequency:

19.7079 MHz

Frequency Tolerance:

±20ppm

ESR (Equivalent Series Resistance):

70 Ohms

Operating Temperature:

-20°C ~ 70°C

Mounting Type:

Surface Mount

Size / Dimension:

0.126" L x 0.098" W (3.20mm x 2.50mm)

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.60.0050

Moisture Sensitivity Level (MSL):

Not Applicable

ECCN:

EAR99

# LOW ESR, LOW CL CERAMIC SMD CRYSTAL

**ABM8W Series**

Request Samples



Check Inventory



3.2 x 2.5 x 0.8 mm  
RoHS/RoHS II Compliant  
MSL Level = N/A



## Features

- Optimized for energy saving wearables and IoT applications
- Plated at exceptionally low plating capacitance, as low as 4pF, with optimized ESR
- Seam sealed for long term reliability

## Applications

- Wearables
- Internet of Things (IoT)
- Bluetooth/Bluetooth Low Energy (BLE)
- Wireless modules
- Machine-to-machine (M2M) connectivity
- Ultra-low power MCU
- Near Field Communication (NFC)
- ISM Band

## Key Electrical Specifications

Parameters	Min.	Typ.	Max.	Units	Notes
Frequency Range	10.0000		54.0000	MHz	
Operation Mode	Fundamental				
Operating Temperature Range	-40		+125	°C	See options
Storage Temperature	-55		+125	°C	
Frequency Tolerance @ +25°C	-10		+10	ppm	See options
Frequency Stability over the Operating Temperature (ref. to +25°C)	-10		+10	ppm	See options
Equivalent series resistance (R1) (over -40°C to +125°C)		< 100	200	Ω	10.0000 – 11.9999MHz
		< 60	100		12.0000 – 15.9999MHz
		< 40	70		16.0000 – 19.9999MHz
		< 25	50		20.0000 – 29.9999MHz
		< 20	40		30.0000 – 39.9999MHz
		< 18	30		40.0000 – 54.0000MHz
Shunt capacitance (C0)		< 1.2	2.0	pF	
Load capacitance (CL)		4.0		pF	See options
Drive Level		10	100	μW	
Aging (1 year)	-2		+2	ppm	@ 25°C±3°C
Insulation Resistance	500			MΩ	@ 100Vdc ± 15V



5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
www.abracon.com


REVISED: 07-11-22

ABRACON IS  
ISO9001-2015  
CERTIFIED

# LOW ESR, LOW CL CERAMIC SMD CRYSTAL

**ABM8W Series**


Request Samples 

Check Inventory 

3.2 x 2.5 x 0.8 mm  
**RoHS/RoHS II Compliant**  
 MSL Level = N/A



## Options and Part Identification [Note 1]

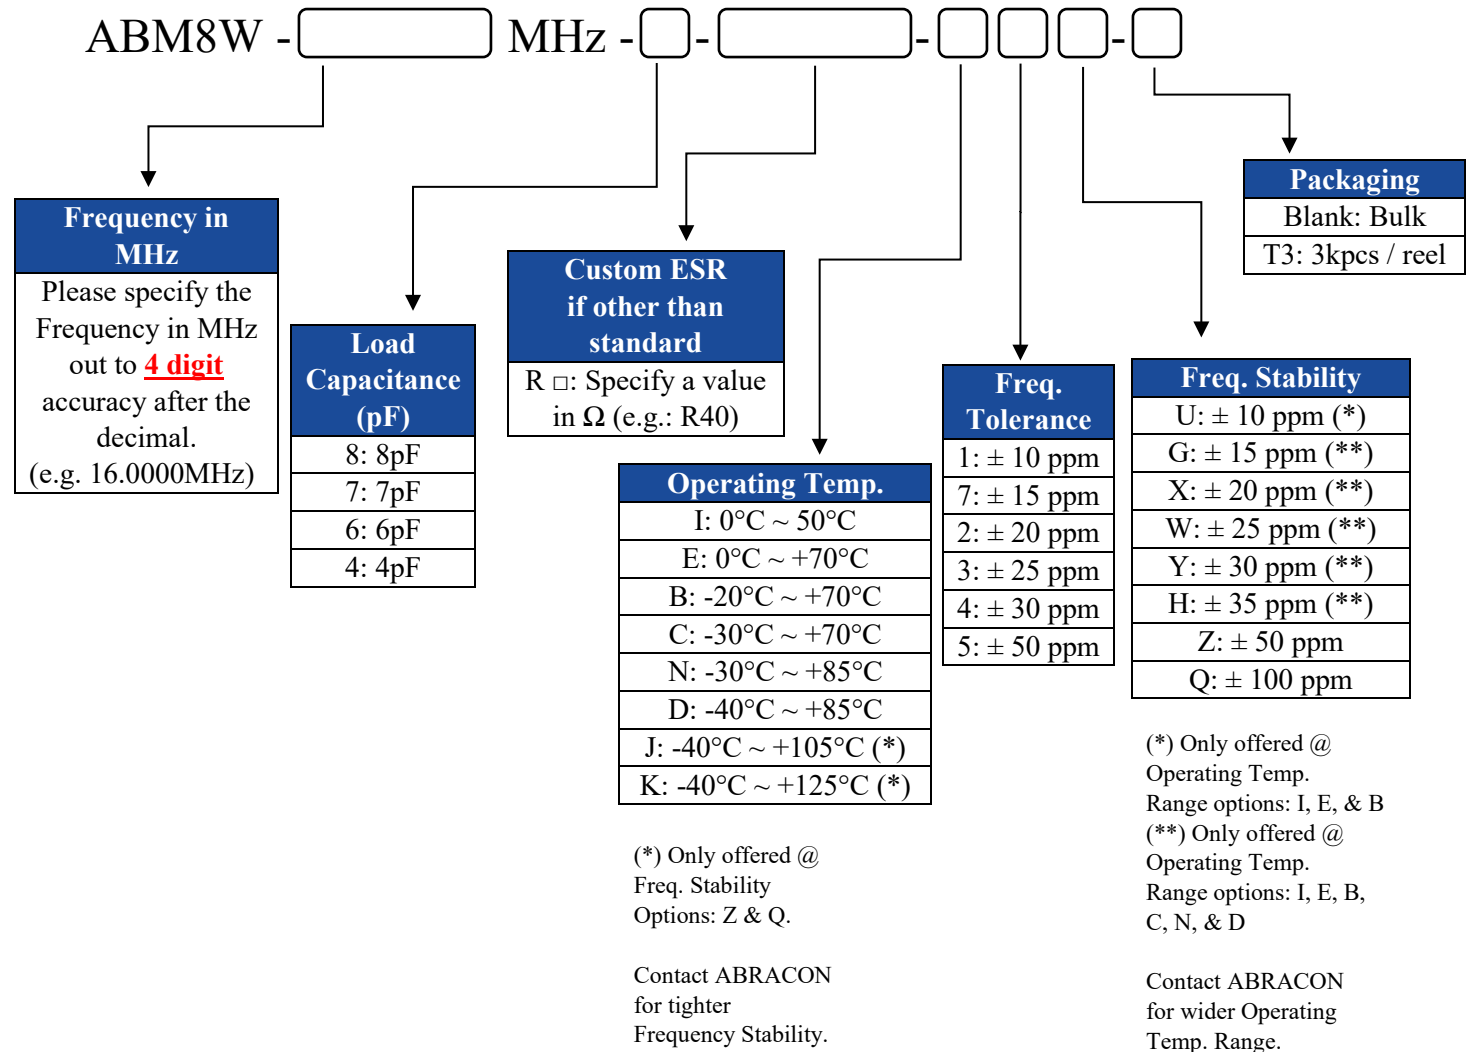

Note 1: Contact Abracon for part number requests with carrier frequency callouts up to 5 & 6 digit accuracy after the decimal.



5101 Hidden Creek Ln Spicewood TX 78669  
 Phone: 512-371-6159 | Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 07-11-22

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# LOW ESR, LOW CL CERAMIC SMD CRYSTAL

**ABM8W Series**

Request Samples





Check Inventory



3.2 x 2.5 x 0.8 mm  
**RoHS/RoHS II Compliant**  
 MSL Level = N/A

## Typical Frequency vs. Temperature Characteristics:

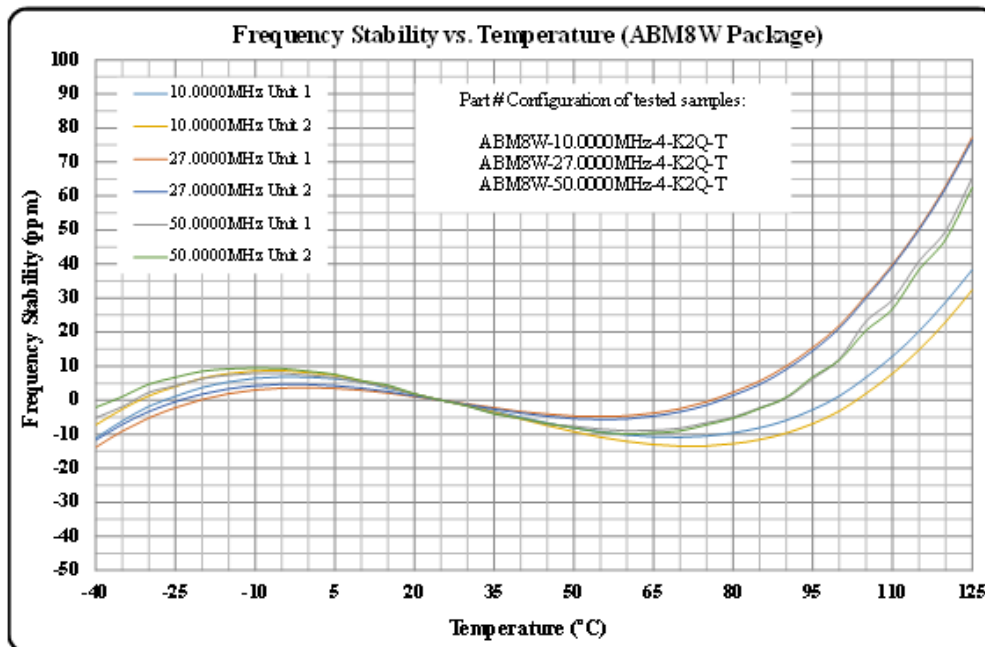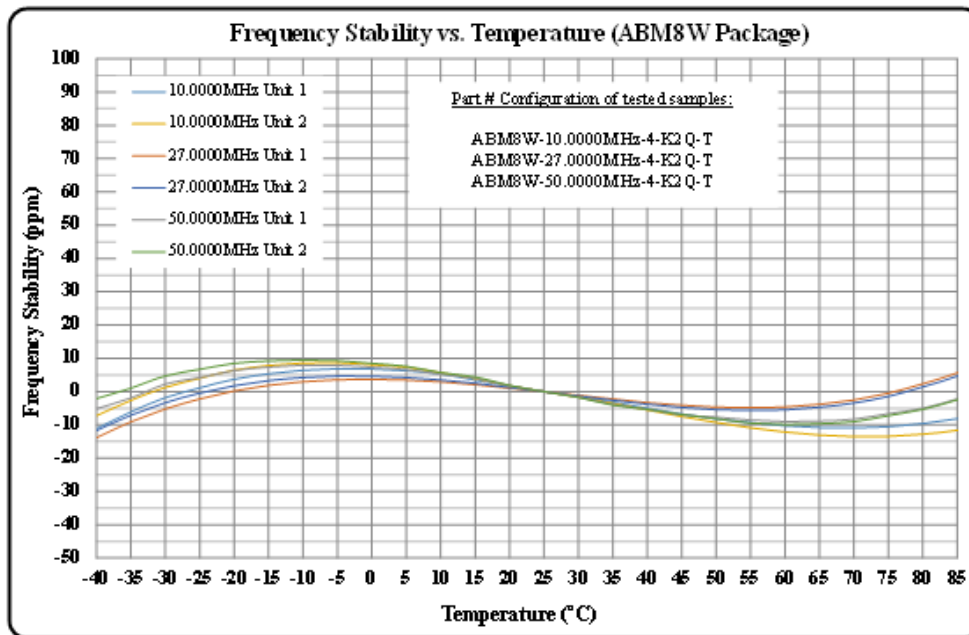

# LOW ESR, LOW CL CERAMIC SMD CRYSTAL

**ABM8W Series**

Request Samples





Check Inventory



3.2 x 2.5 x 0.8 mm  
**RoHS/RoHS II Compliant**  
 MSL Level = N/A

## Typical ESR (Equivalent Series Resistance) vs. Temperature Characteristics:

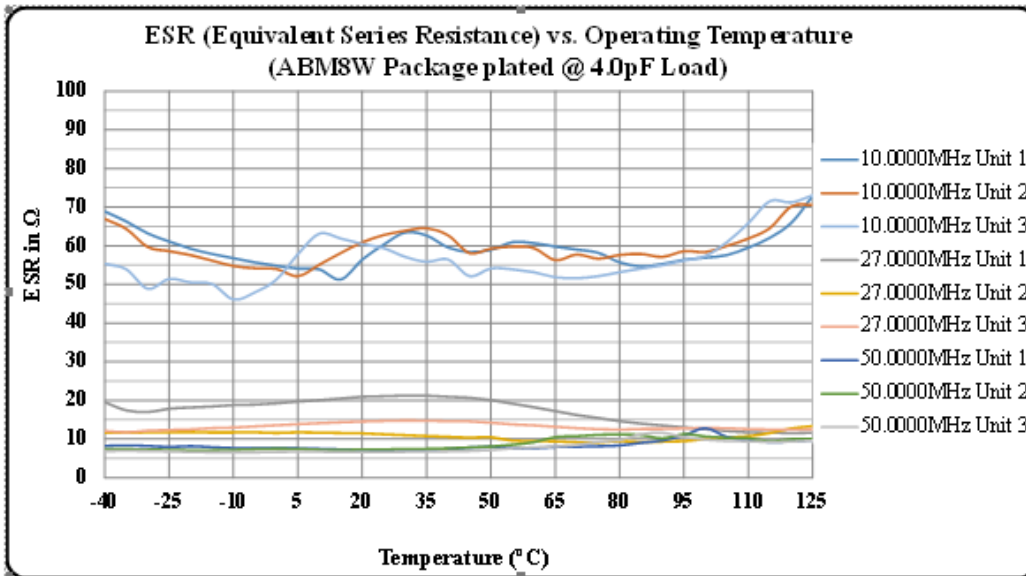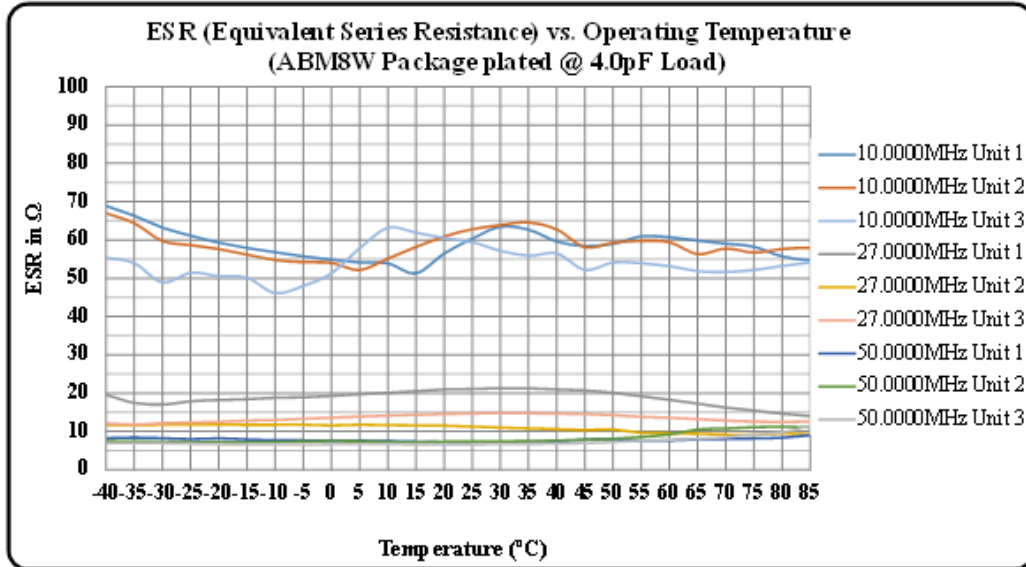

# LOW ESR, LOW CL CERAMIC SMD CRYSTAL

**ABM8W Series**

Request Samples




Check Inventory



3.2 x 2.5 x 0.8 mm  
**RoHS/RoHS II Compliant**  
 MSL Level = N/A




**SPICE Models (based on typical values at 25°C ± 3°C):**

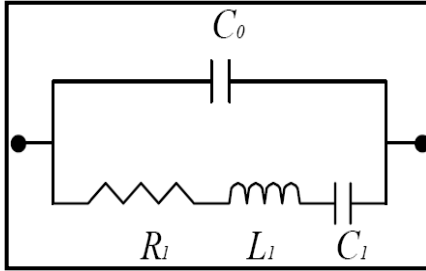

<b>Frequency: 10.0000MHz</b> <b>Plating Load: 4pF</b>		<b>Frequency: 10.0000MHz</b> <b>Plating Load: 6pF</b>	
C0	= 0.88 pF	C0	= 0.86 pF
R1	= 53.82 Ω	R1	= 60.62 Ω
L1	= 162.02 mH	L1	= 164.96 mH
C1	= 1.56 fF	C1	= 1.54 fF
<b>Frequency: 27.0000MHz</b> <b>Plating Load: 4pF</b>		<b>Frequency: 27.0000MHz</b> <b>Plating Load: 6pF</b>	
C0	= 1.16 pF	C0	= 1.16 pF
R1	= 11.83 Ω	R1	= 11.06 Ω
L1	= 9.16 mH	L1	= 9.10 mH
C1	= 3.80 fF	C1	= 3.82 fF
<b>Frequency: 50.0000MHz</b> <b>Plating Load: 4pF</b>		<b>Frequency: 50.0000MHz</b> <b>Plating Load: 6pF</b>	
C0	= 1.16 pF	C0	= 1.15 pF
R1	= 7.61 Ω	R1	= 8.06 Ω
L1	= 2.45 mH	L1	= 2.49 mH
C1	= 4.14 fF	C1	= 4.07 fF

**Typical Frequency Tolerance Distribution (at 25°C ± 3°C):**

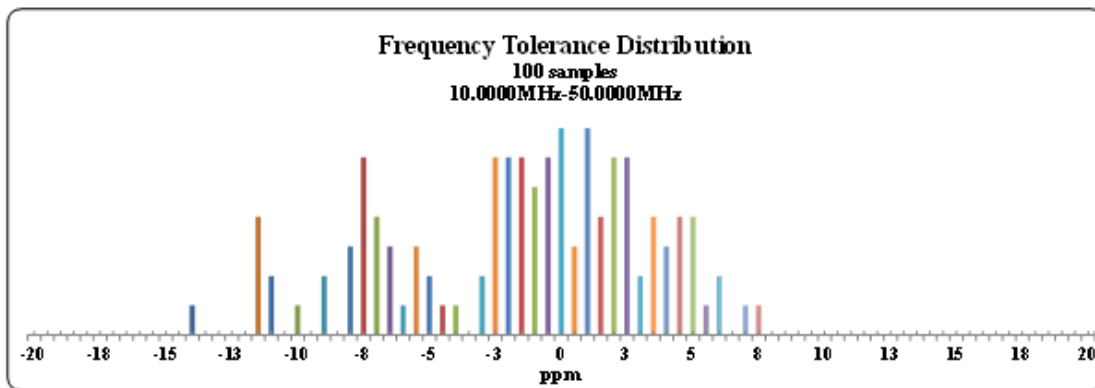

# LOW ESR, LOW CL CERAMIC SMD CRYSTAL

**ABM8W Series**

Request Samples






Check Inventory



3.2 x 2.5 x 0.8 mm  
**RoHS/RoHS II Compliant**  
 MSL Level = N/A

**Typical ESR Distribution (at 25°C ± 3°C):**

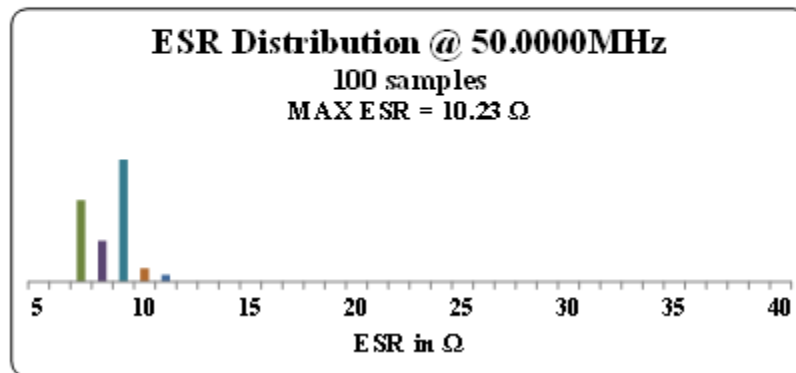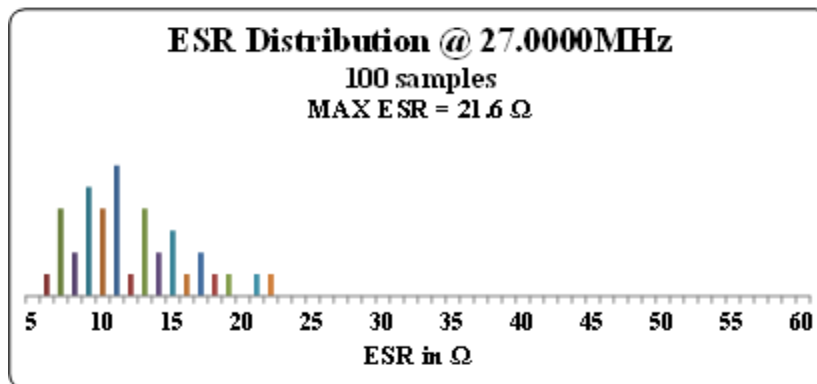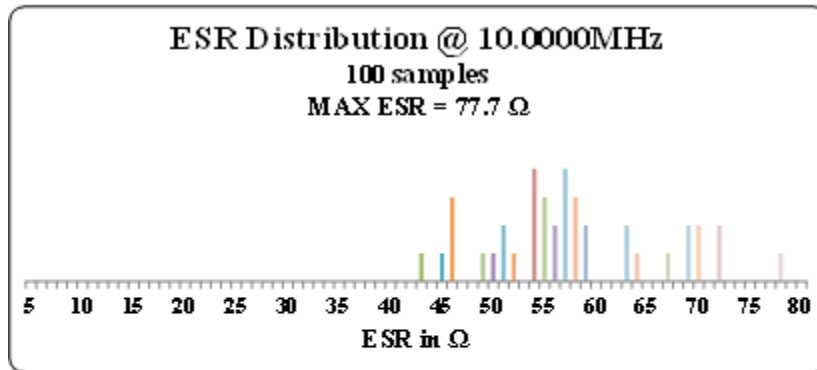

# LOW ESR, LOW CL CERAMIC SMD CRYSTAL

**ABM8W Series**

Request Samples




Check Inventory



3.2 x 2.5 x 0.8 mm  
**RoHS/RoHS II Compliant**  
 MSL Level = N/A



## Mechanical Dimensions

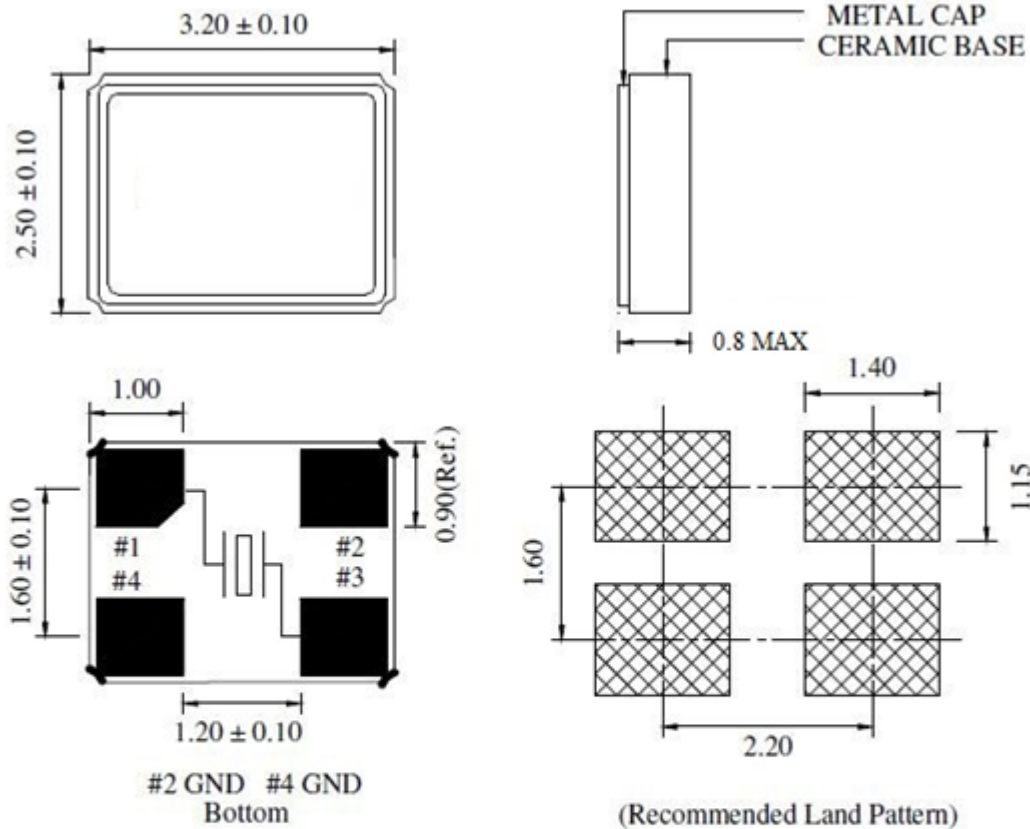

**Note:**

Due to material availability the Chamfer could be located on pin #1, 2 or 4. Be advised that the Chamfer location has no impact on the electrical performance of the device.

**Dimensions: mm**

# LOW ESR, LOW CL CERAMIC SMD CRYSTAL

**ABM8W Series**

Request Samples




Check Inventory



**3.2 x 2.5 x 0.8 mm**  
**RoHS/RoHS II Compliant**  
**MSL Level = N/A**



## Reflow Profile [JEDEC J-STD-020]

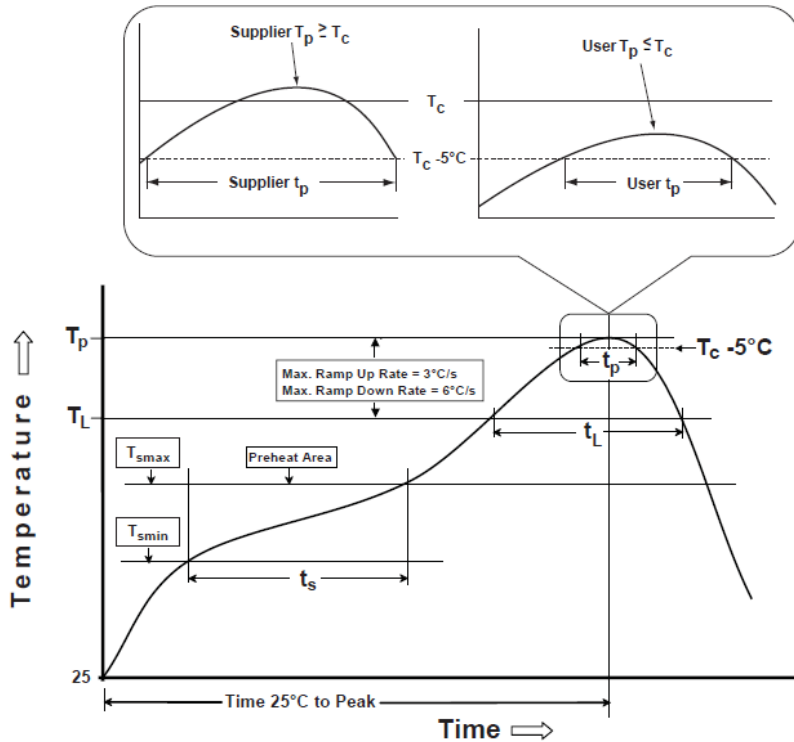

**Table 1**

**SnPb Eutectic Process Classification Temperatures (T<sub>c</sub>)**

Package Thickness	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

**Table 2**

**Pb-Free Process Classification Temperatures (T<sub>c</sub>)**

Package Thickness	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350-2000	Volume mm <sup>3</sup> >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T <sub>smin</sub> )	100°C	150°C
Temperature maximum (T <sub>smax</sub> )	150°C	200°C
Time (T <sub>smin</sub> to T <sub>smax</sub> ) (t <sub>s</sub> )	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T <sub>smax</sub> to T <sub>p</sub> )	3°C/sec. max	3°C/sec. max
Liquidous temperature (T <sub>L</sub> )	183°C	217°C
Time at liquidous (t <sub>L</sub> )	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T <sub>p</sub> )*	<b>see Table 1</b>	<b>see Table 2</b>
Time (t <sub>p</sub> )** within 5°C of the specified classification temperature (T <sub>c</sub> )	20 sec.	30 sec.
Ramp-down rate (T <sub>p</sub> to T <sub>smax</sub> )	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

\*Tolerance for peak profile temperature (T<sub>p</sub>) is defined as a supplier minimum and a user maximum.

\*\*Tolerance for time at peak profile temperature (t<sub>p</sub>) is defined as supplier minimum and a user maximum.



5101 Hidden Creek Ln Spicewood TX 78669  
 Phone: 512-371-6159 | Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 07-11-22

ABRACON IS  
 ISO9001-2015  
 CERTIFIED



## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.