


# ASPI-0630HI-3R3M-T15 Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)

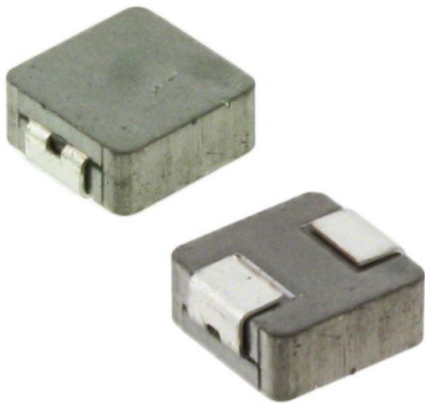

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	ASPI-0630HI-3R3M-T15-DG
Manufacturer	<a href="#">Abracon LLC</a>
Manufacturer Product Number	ASPI-0630HI-3R3M-T15
Description	FIXED IND 3.3UH 6.8A 30 MOHM SMD
Detailed Description	3.3 $\mu$ H Shielded Molded Inductor 6.8 A 30mOhm Max Nonstandard



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

ASPI-0630HI-3R3M-T15

Series:

ASPI-0630HI

Type:

Molded

Inductance:

3.3  $\mu$ H

Current Rating (Amps):

6.8 A

Shielding:

Shielded

Q @ Freq:

-

Ratings:

-

Inductance Frequency - Test:

100 kHz

Package / Case:

Nonstandard

Size / Dimension:

0.283" L x 0.262" W (7.20mm x 6.65mm)

Manufacturer:

Abracon LLC

Product Status:

Active

Material - Core:

Carbonyl Powder

Tolerance:

$\pm$ 20%

Current - Saturation (Isat):

13.5A

DC Resistance (DCR):

30mOhm Max

Frequency - Self Resonant:

-

Operating Temperature:

-55°C ~ 125°C

Mounting Type:

Surface Mount

Supplier Device Package:

-

Height - Seated (Max):

0.118" (3.00mm)

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.8000

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

# Molded Power Inductor



## ASPI-0630HI Series

Request Samples



Check Inventory



7.2 x 6.6 x 3.0 mm  
**RoHS/RoHS II Compliant**  
 MSL Level = 1

### Features

- High saturation current
- Low loss due to low DC resistance.
- Frequency application up to 3MHz.
- Low profile with max thickness 3.0mm.
- 100% lead free and meets RoHS standard.
- Suitable for reflow soldering.
- High reliability SMD package

### Applications

- DC/DC converters
- Notebook/Laptop power circuitry
- Desktop, Workstation, Server power circuitry
- Low profile, high current power supplies.

### Electrical Specifications

Part Number	Inductance	DCR		Saturation Current	Temperature Rise Current	Dim E
		Typ	Max			
Units	$\mu\text{H}$	$\text{m}\Omega$	$\text{m}\Omega$	A	A	mm
Symbol	L			Isat	Irms	
ASPI-0630HI-R10M	0.10	1.15	1.7	60.0	32.5	2.0
ASPI-0630HI-R15M	0.15	1.35	2.5	52.0	26.0	2.0
ASPI-0630HI-R20M	0.20	2.45	3.0	41.0	24.0	3.0
ASPI-0630HI-R22M	0.22	2.45	2.8	40.0	23.0	3.0
ASPI-0630HI-R33M	0.33	3.1	3.9	30.0	20.0	3.0
ASPI-0630HI-R47M	0.47	4.0	4.2	26.0	17.5	3.0
ASPI-0630HI-R56M	0.56	4.8	5.0	25.5	16.5	3.0
ASPI-0630HI-R68M	0.68	4.95	5.5	25.0	15.5	3.0
ASPI-0630HI-R82M	0.82	7.15	8.0	24.0	13.0	3.0
ASPI-0630HI-1R0M	1.0	9.3	10.0	22.0	11.0	3.0
ASPI-0630HI-1R2M	1.2	11.6	13.0	20.0	10.0	3.0
ASPI-0630HI-1R5M	1.5	13.5	15.0	18.0	9.0	3.0
ASPI-0630HI-1R8M	1.8	14.9	18.0	16.0	8.5	3.0
ASPI-0630HI-2R2M	2.2	18.3	20.0	14.0	8.0	3.0
ASPI-0630HI-3R3M	3.3	28.0	30.0	13.5	6.0	3.0
ASPI-0630HI-4R7M	4.7	38.0	40.0	10.0	5.5	3.0
ASPI-0630HI-5R6M	5.6	46.9	50.0	9.0	5.0	3.0
ASPI-0630HI-6R8M	6.8	54.8	60.0	8.0	4.5	3.0
ASPI-0630HI-8R2M	8.2	61.5	68.0	7.5	4.0	3.0
ASPI-0630HI-100M	10.0	102.5	105.0	7.0	3.0	3.0

ASPI-0630HI is **RoHS/RoHS II Compliant and Pb free**

MSL level: 1



5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION B : 3/31/2022

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# Molded Power Inductor



## ASPI-0630HI Series

Request Samples



Check Inventory



7.2 x 6.6 x 3.0 mm  
**RoHS/RoHS II Compliant**  
 MSL Level = 1

### Test Conditions

1. Temperature:  $26^{\circ}\text{C} \pm 3^{\circ}\text{C}$ , Humidity:  $< 70\% \text{ RH}$ , Frequency  $100\text{KHz}/0.25\text{v}$
2. Inductance is measured in HP-4284A Precision LCR Meter.
3. RDC is measured in HP-4338B milli ohm meter.(or equivalent).
4. Isat: Based on inductance change ( $\Delta L/L_0 : \leq -20\%$ )
5. Irms: Based on temperature rise ( $\Delta T : 40^{\circ}\text{C TYP.}$ )


### Operating Temperature

$-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  (Including self-generated heat)

### Storage Temperature and Humidity

$+25^{\circ}\text{C}$  to  $+35^{\circ}\text{C}$ , 45% to 85% RH

### Typical Performance Graphs

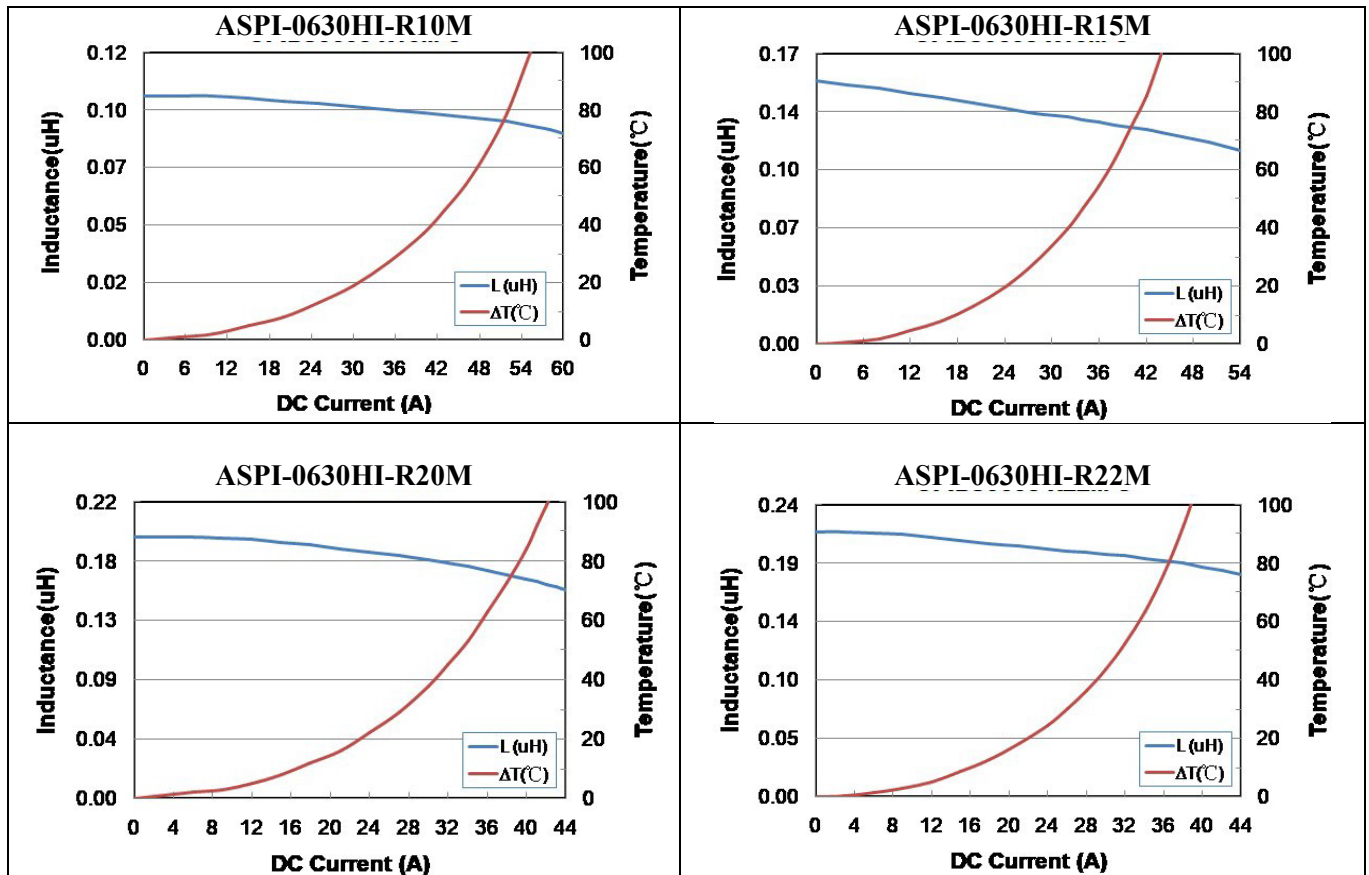

# Molded Power Inductor



ASPI-0630HI Series







Request Samples



Check Inventory



7.2 x 6.6 x 3.0 mm  
 RoHS/RoHS II Compliant  
 MSL Level = 1

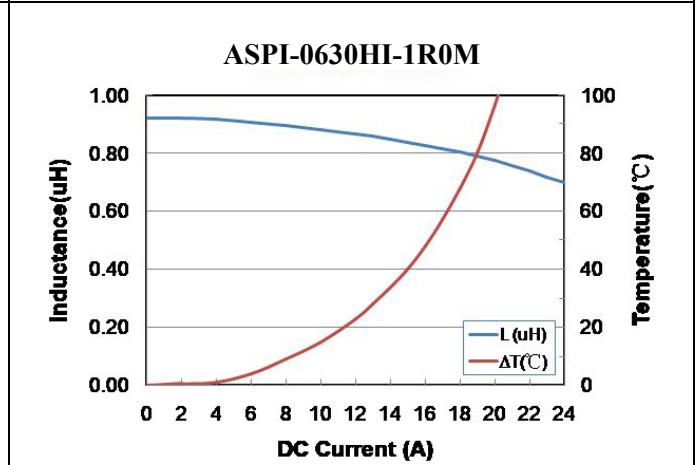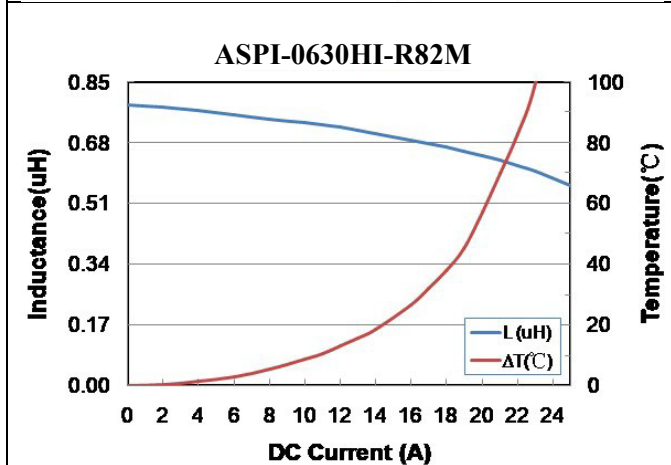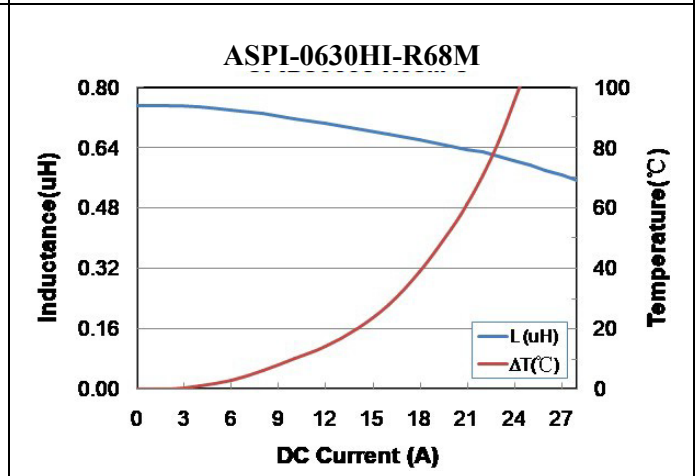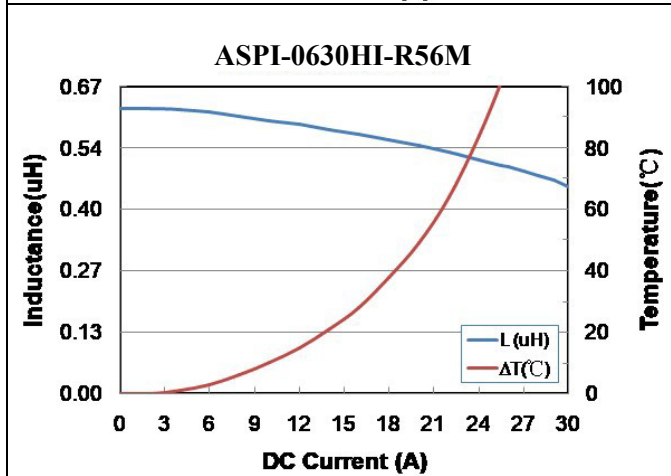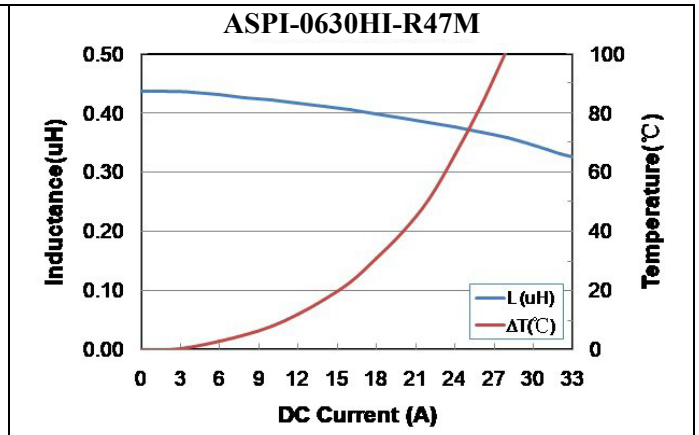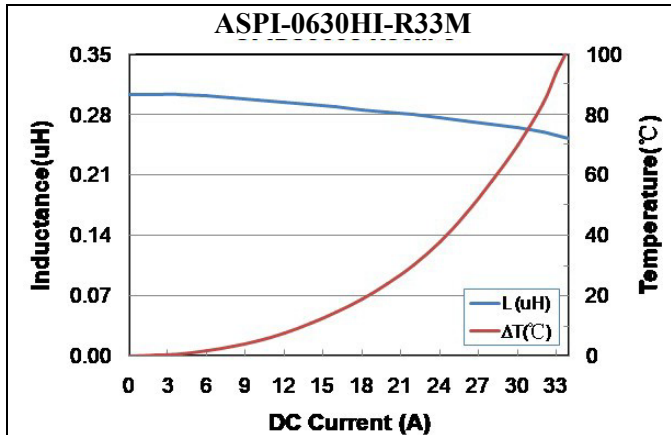


5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION B : 3/31/2022

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# Molded Power Inductor



ASPI-0630HI Series


Request Samples



Check Inventory



7.2 x 6.6 x 3.0 mm  
 RoHS/RoHS II Compliant  
 MSL Level = 1

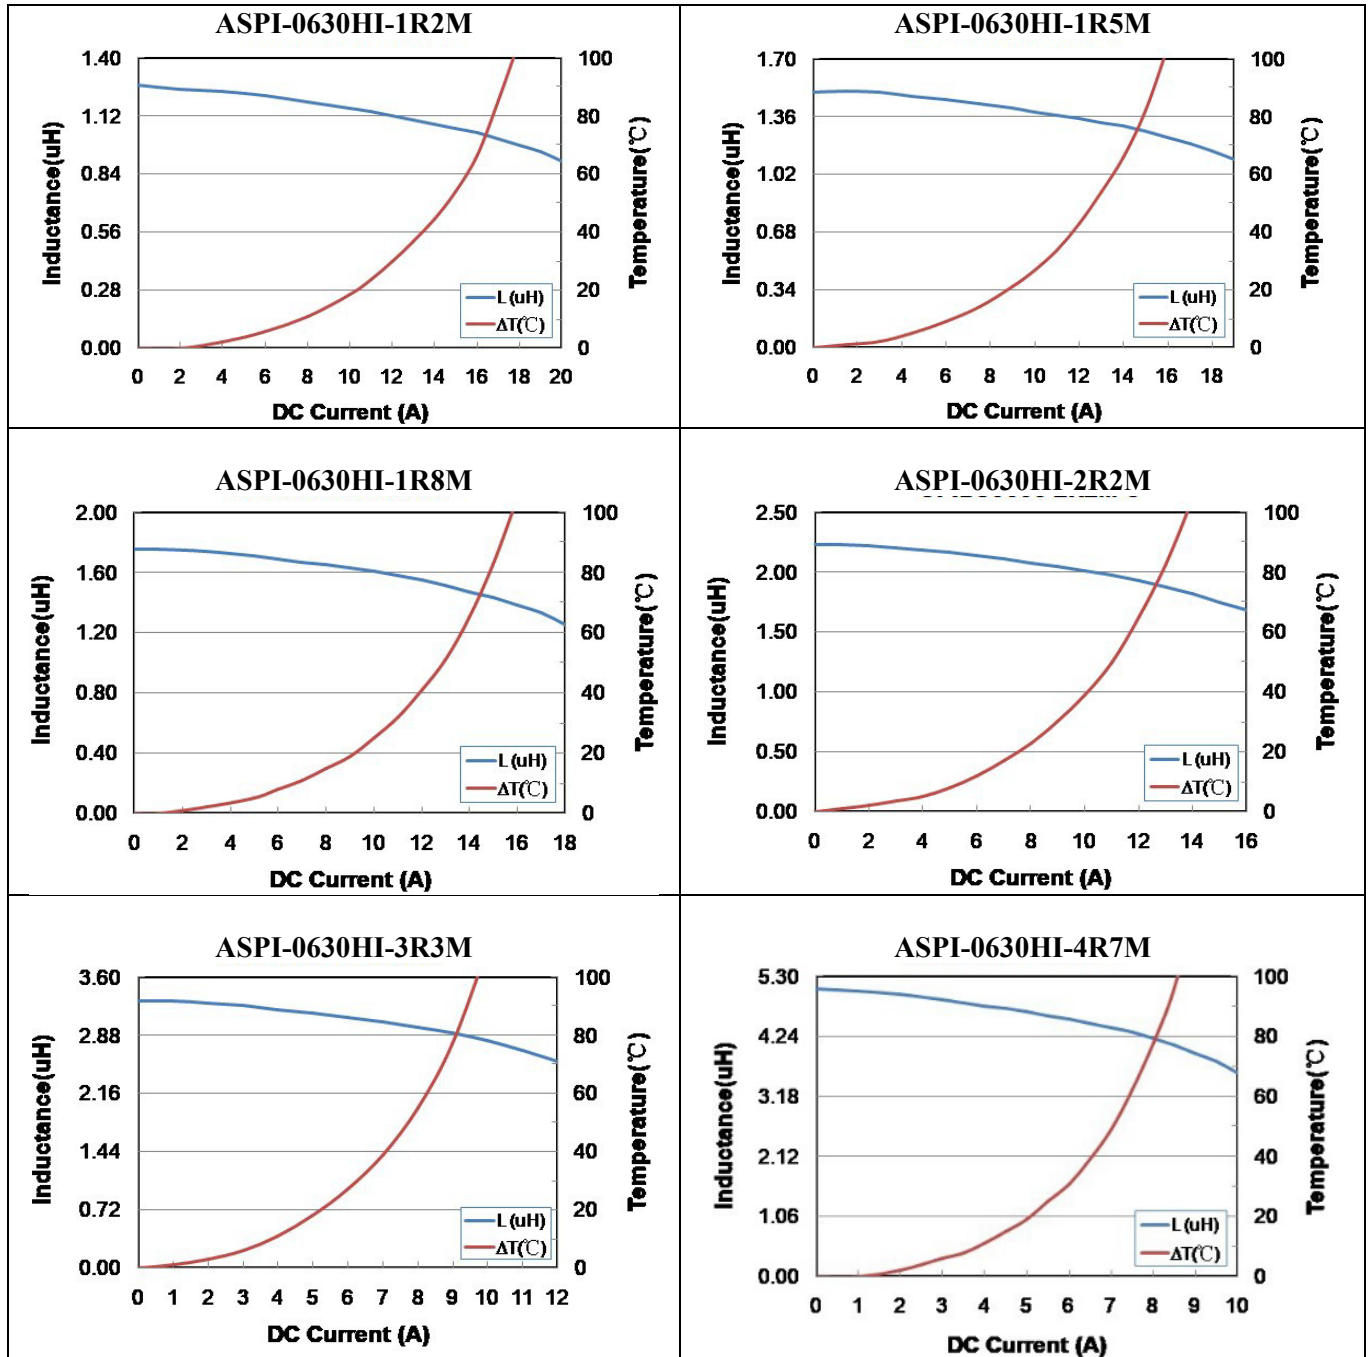


5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION B : 3/31/2022

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# Molded Power Inductor



**ASPI-0630HI Series**


Request Samples




Check Inventory



7.2 x 6.6 x 3.0 mm  
**RoHS/RoHS II Compliant**  
 MSL Level = 1

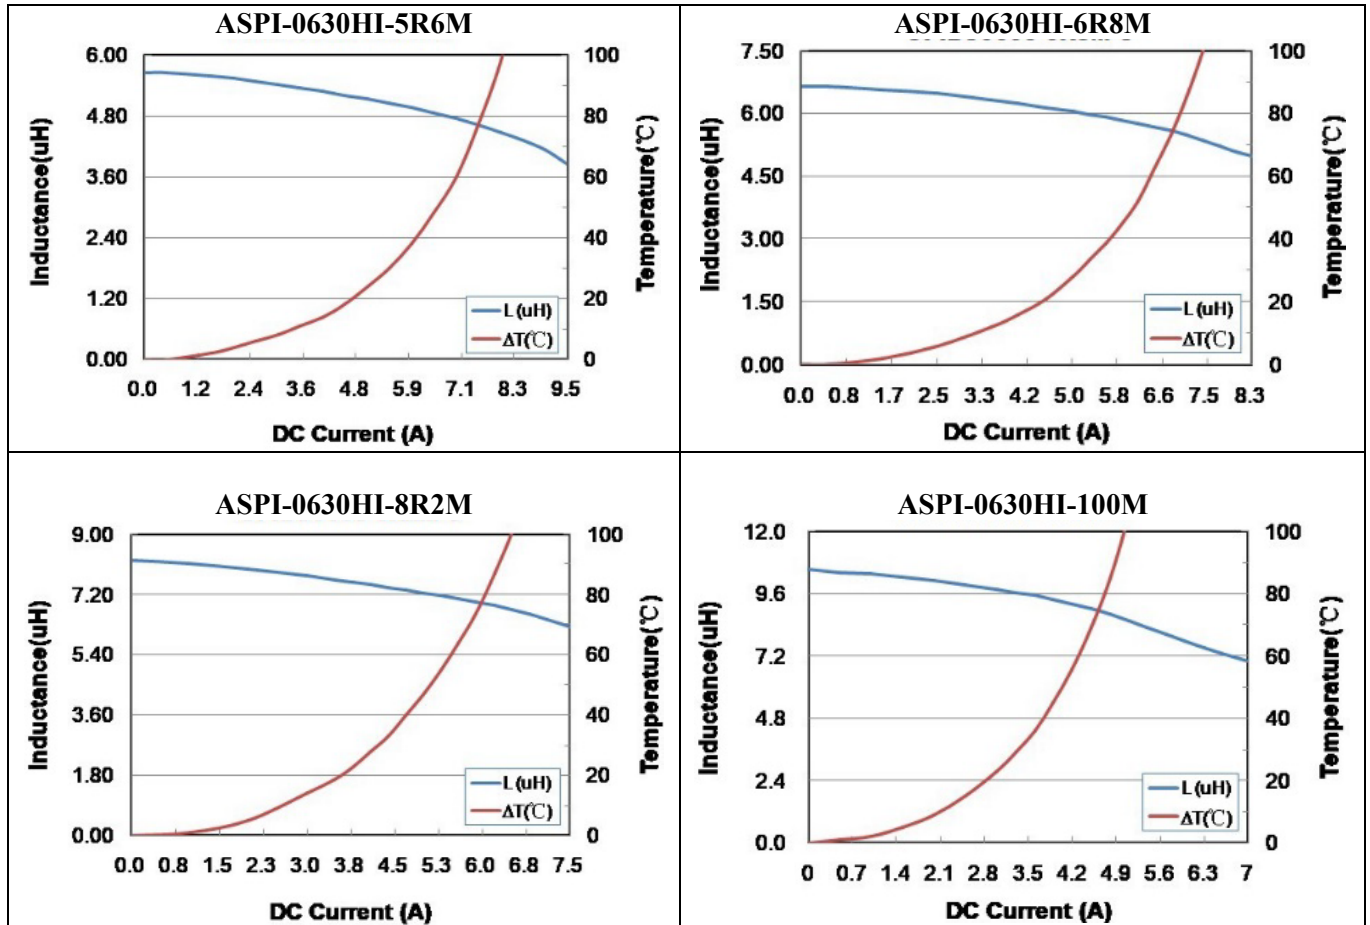

## Part Number Identification

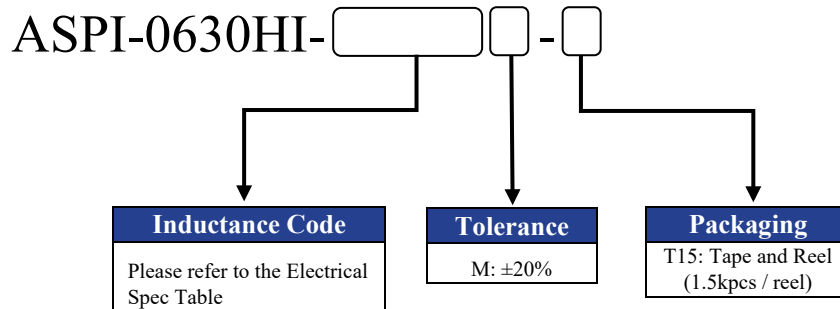


5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION B : 3/31/2022

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# Molded Power Inductor



ASPI-0630HI Series

Request Samples




Check Inventory



7.2 x 6.6 x 3.0 mm  
RoHS/RoHS II Compliant  
MSL Level = 1




## Marking



Inductance Code  
e.g. 2R2

Marking Method = Ink Marking

## Mechanical Specifications

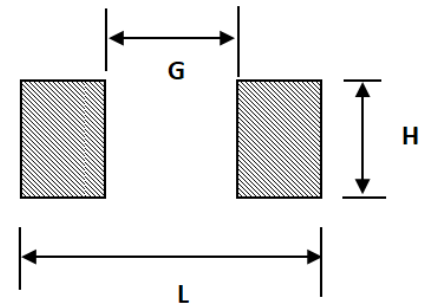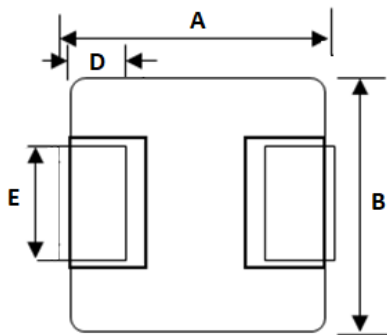

### Recommended Layout

A	B	C	D	E	G	H	L
7.2 ±0.3	6.60 ±0.3	3.0 MAX	1.6 ±0.3	See Electrical Specs table	3.7	3.5	8.0

Dimension: mm



5101 Hidden Creek Ln, Spicewood TX 78669  
Phone: 512-371-6159 Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION B : 3/31/2022

ABRACON IS  
ISO9001-2015  
CERTIFIED



# Molded Power Inductor



**ASPI-0630HI Series**

Request Samples



Check Inventory



7.2 x 6.6 x 3.0 mm  
**RoHS/RoHS II Compliant**  
 MSL Level = 1

## Materials List

No	Part Name	Material
1	Core	Metal powder
2	Base	Cu + Ni + Sn plating
3	Wire	Copper wire, EIW Class
4	Marking	Ink(black)
5	Paint	Epoxy resin

# Molded Power Inductor


**ASPI-0630HI Series**

Request Samples




Check Inventory



7.2 x 6.6 x 3.0 mm  
 RoHS/RoHS II Compliant  
 MSL Level = 1

## Reflow Profile

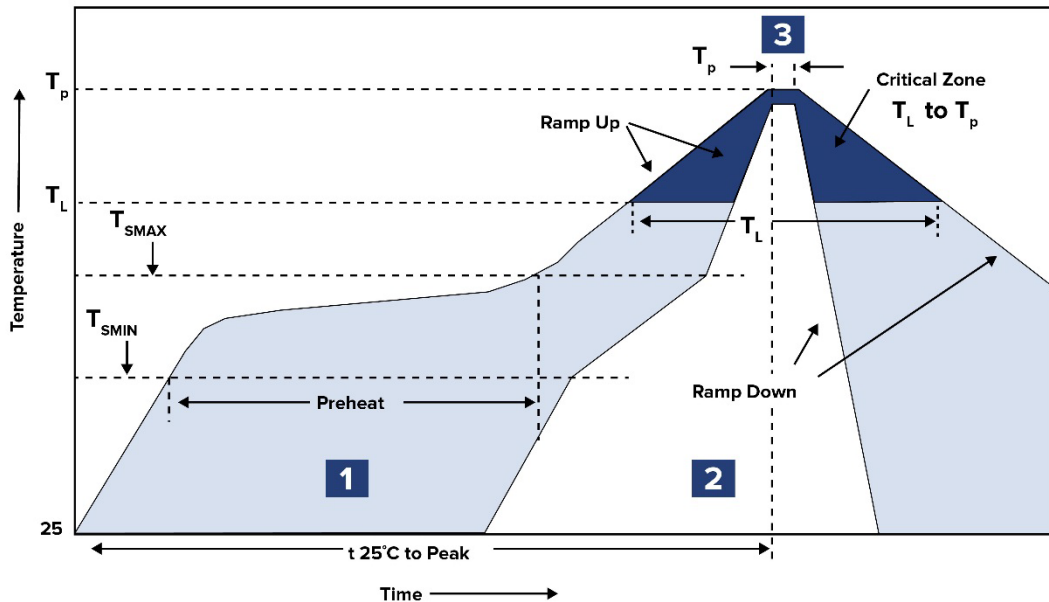

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 200°C	60 ~ 120 sec.
2	Reflow	$T_L$ 217°C	60 ~ 90 sec.
3	Peak heat	$T_P$ 255°C±5°C	10 sec. MAX

# Molded Power Inductor


**ASPI-0630HI Series**



Request Samples



Check Inventory


**7.2 x 6.6 x 3.0 mm**  
**RoHS/RoHS II Compliant**  
 MSL Level = 1

## Packaging

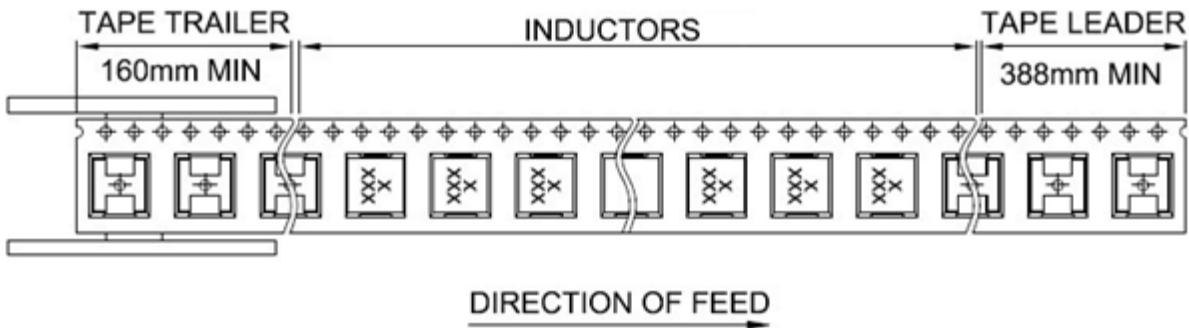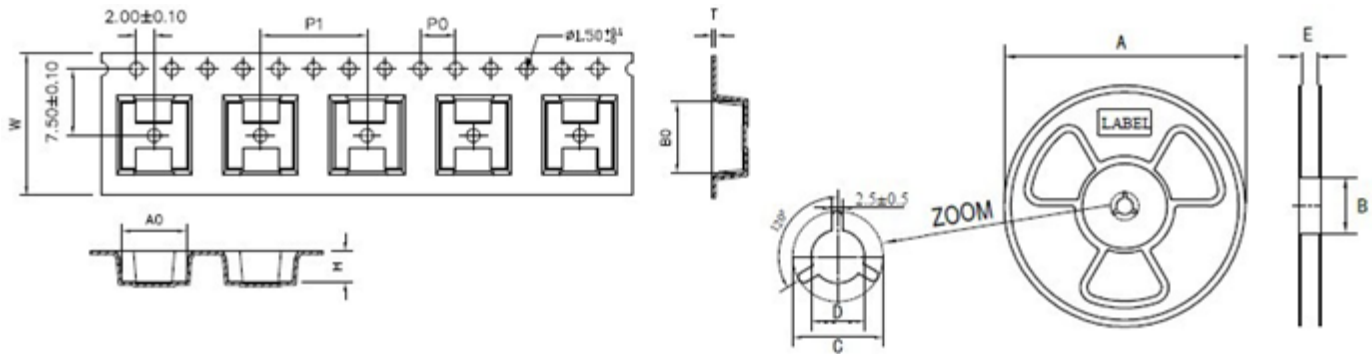**T15: 1,500pcs / reel**


Part Number	Reel Dimensions (mm)				
	A	B	C	D	E
ASPI-0630HI	330 ±1	100 ±0.5	20.2 min	13 +0.5/-0	16.4 +2/-0

Part Number	Tap Dimensions (mm)						
	W	P1	P0	H	T	A0	B0
ASPI-0630HI	16 ±0.3	12 ±0.1	4.0 ±0.1	3.4 ±0.1	0.30 ±0.05	6.9 ±0.1	6.0 ±0.1

**ATTENTION:** Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.


 5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)
**REVISION B : 3/31/2022**

 ABRACON IS  
 ISO9001-2015  
 CERTIFIED

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.