

ASPI-1306S-471M-T Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	ASPI-1306S-471M-T-DG
Manufacturer	Abracon LLC
Manufacturer Product Number	ASPI-1306S-471M-T
Description	FIXED IND 470UH 730MA 1.08OHM SM
Detailed Description	470 μ H Shielded Drum Core, Wirewound Inductor 730 mA 1.08Ohm Max Nonstandard



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

ASPI-1306S-471M-T

Series:

ASPI-1306S

Type:

Drum Core, Wirewound

Inductance:470 μ H**Current Rating (Amps):**

730 mA

Shielding:

Shielded

Q @ Freq:

-

Ratings:

-

Inductance Frequency - Test:

100 kHz

Package / Case:

Nonstandard

Size / Dimension:

0.730" L x 0.600" W (18.54mm x 15.24mm)

Manufacturer:

Abracon LLC

Product Status:

Active

Material - Core:

Ferrite

Tolerance: \pm 20%**Current - Saturation (Isat):**

900mA

DC Resistance (DCR):

1.080hm Max

Frequency - Self Resonant:

1.1MHz

Operating Temperature:

-40°C ~ 85°C

Mounting Type:

Surface Mount

Supplier Device Package:

-

Height - Seated (Max):

0.300" (7.62mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.8000

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

SMD SHIELDED POWER INDUCTOR

ASPI-1306S-471M-T Abracon LLC FIXED IND 470UH 730MA 1.08OHM SM



18.5 x 15.2 x 7.6 mm

ASPI-1306S



FEATURES:

- Low radiation shielded architecture
- Large pads for good PCB mounting
- Low DCR, suitable for large currents
- High Energy storage

APPLICATIONS:

- Portable communication equipment
- OA equipment
- LCD, DVD, modem, set-top box
- DC/DC converter

ELECTRICAL SPECIFICATIONS:


Abracon P/N:	ASPI-1306S
Operating Temperature:	-40°C to +125°C (including self-generated heat)
Storage Temperature:	-40°C to +125°C

PART NUMBER	INDUCTANCE (uH) ±20%	DCR(Ω) max	Isat (A) max	Irms (A) max	Q	SRF (MHz) Ref.
ASPI-1306S-100M	10	0.040	8.00	3.90	30.0	8.0
ASPI-1306S-150M	15	0.048	7.00	3.40	20.0	7.0
ASPI-1306S-220M	22	0.059	6.00	3.10	18.0	6.0
ASPI-1306S-330M	33	0.075	5.00	2.80	14.0	5.0
ASPI-1306S-470M	47	0.097	4.00	2.40	10.0	4.0
ASPI-1306S-680M	68	0.138	3.00	2.00	9.0	3.0
ASPI-1306S-101M	100	0.207	2.40	1.70	7.0	2.4
ASPI-1306S-151M	150	0.293	2.10	1.30	6.0	2.1
ASPI-1306S-221M	220	0.470	1.90	1.10	5.0	1.9
ASPI-1306S-331M	330	0.780	1.10	0.86	4.0	1.1
ASPI-1306S-471M	470	1.08	0.90	0.73	3.0	1.1
ASPI-1306S-681M	680	1.40	0.96	0.64	2.5	0.96
ASPI-1306S-102M	1000	2.01	0.80	0.53	2.0	0.80

Test Conditions

- Inductance:** 200kHz, 0.1V (10 μH – 15 μH)
- Inductance: 100kHz, 0.1V (22 μH – 1000 μH)
- Isat:** ΔL/L (initial) ≥ -10%
- Irms:** ΔT ≤ 40°C

OPTIONS AND PART IDENTIFICATION

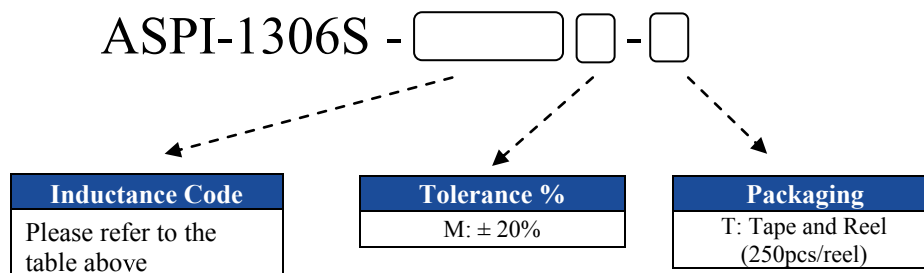

SMD SHIELDED POWER INDUCTOR

ASPI-1306S-471M-T Abracon LLC FIXED IND 470UH 730MA 1.08OHM SM




18.5 x 15.2 x 7.6 mm


ASPI-1306S




MECHANICAL DIMENSIONS

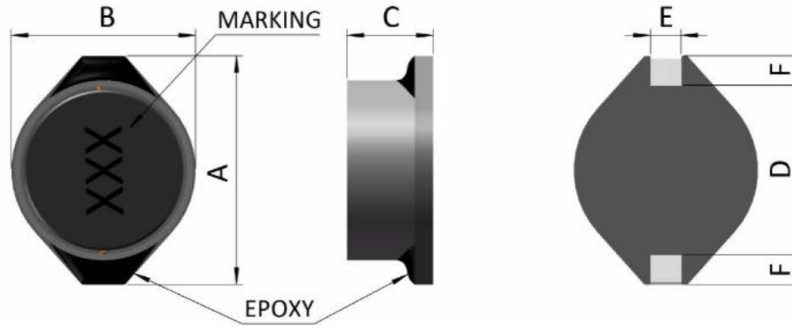

Part	A (max)	B (max)	C (max)	D	E	F
ASPI-1306S	18.54 ±0.15	15.24 ±0.15	7.62 ±0.15	12.7 ±0.15	2.54 ±0.15	2.54 ±0.15

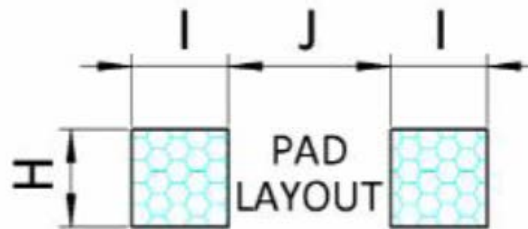

Part	H	I	J
ASPI-1306S	2.79 ±0.15	2.92 ±0.15	12.45 ±0.15

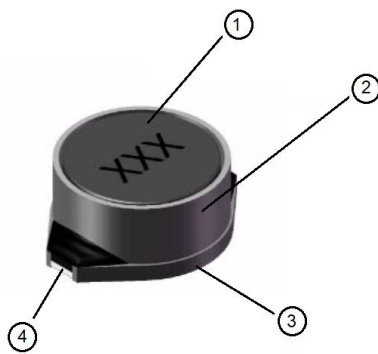

Materials

No	Part Name	Material
1	Core	Fe ₂ O ₃
		Mn ₃ O ₄
		ZnO
		TMH 219 epoxy insulating powder (Black)
2	Wire	Copper Polyurethane Resin
3	Base	Aromatic polyester resin Class fiber
4	SN	CU
		Sn
		Ni

Dimension: mm

SMD SHIELDED POWER INDUCTOR

ASPI-1306S 471M T Abracon LLC FIXED IND 470UH 730MA 1.08OHM SM





18.5 x 15.2 x 7.6 mm

ASPI-1306S




ELECTRICAL SPECIFICATION CHART

Packing
T: 250pcs / reel

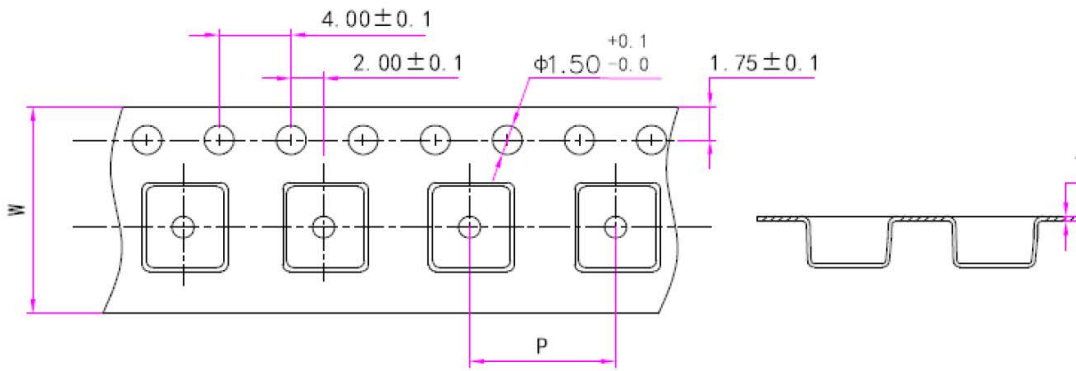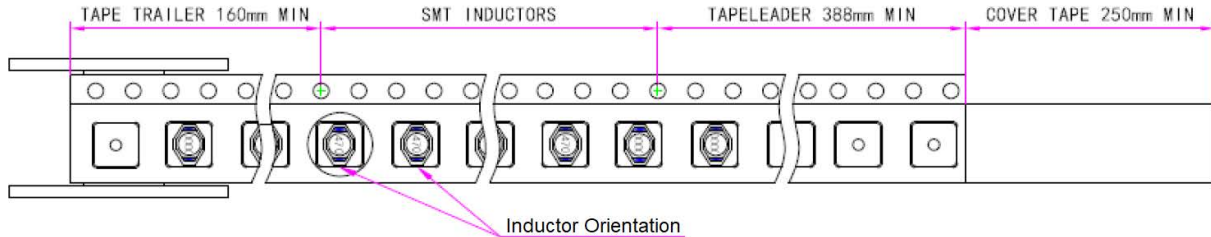

W	P	T
32 ± 0.3	20 ± 0.1	0.35 ± 0.05

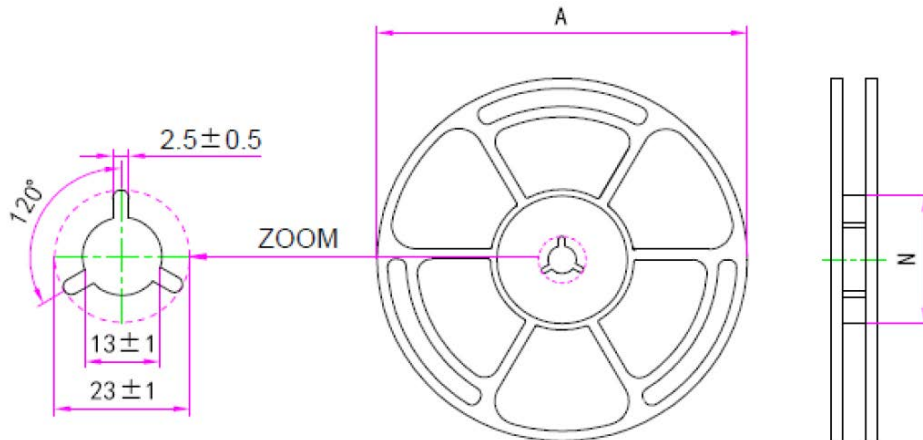

A	N
330	100

Dimension: mm

SMD SHIELDED POWER INDUCTOR

ASPI-1306S-471M-T Abracon LLC FIXED-IND-470UH 730MA 1.08OHM SM




18.5 x 15.2 x 7.6 mm

ASPI-1306S



REFLOW PROFILE:

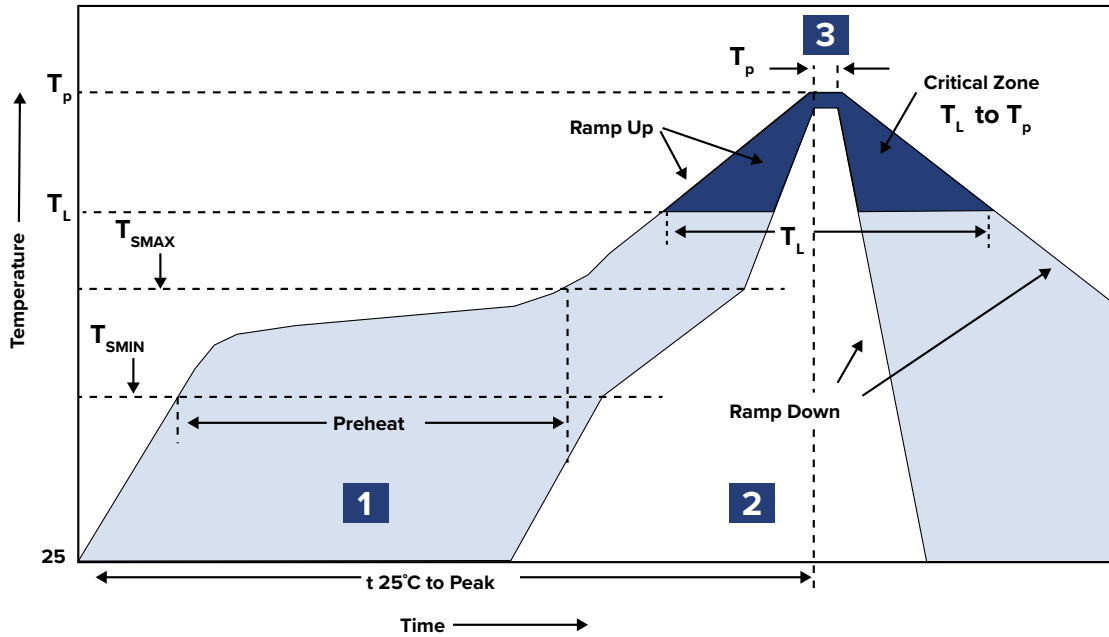

Zone	Description	Temperature	Time
1	Preheat / Soak	T_{SMAX} 150°C ~ 180°C	60 ~ 120 sec.
2	Reflow	T_L 230°C	40 sec.
3	Peak heat	T_p 250°C ±5°C	10 sec. MAX

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.