

MAZ21800AG Datasheet



www.digi-electronics.com

<https://www.DiGi-Electronics.com>

| | |
|------------------------------|--|
| DiGi Electronics Part Number | MAZ21800AG-DG |
| Manufacturer | Panasonic Electronic Components |
| Manufacturer Product Number | MAZ21800AG |
| Description | DIODE ZENER 18V 1W DO41 |
| Detailed Description | Zener Diode 18 V 1 W \pm 6% Through Hole DO41-A1 |

This model MAZ21800AG is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

MAZ21800AG

Series:

-

Voltage - Zener (Nom) (Vz):

18 V

Power - Max:

1 W

Current - Reverse Leakage @ Vr:

5 μ A @ 12 V

Operating Temperature:

200°C

Package / Case:

DO-204AL, DO-41, Axial

Base Product Number:

MAZ218

Manufacturer:

Panasonic Electronic Components

Product Status:

Obsolete

Tolerance:

\pm 6%

Impedance (Max) (Zzt):

15 Ohms

Voltage - Forward (Vf) (Max) @ If:

1 V @ 200 mA

Mounting Type:

Through Hole

Supplier Device Package:

DO41-A1

Environmental & Export classification

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8541.10.0050

ECCN:

EAR99

MAZ2000 Series (MA2000 Series)

Silicon planar type

For stabilization of power supply

■ Features

- High reliability, achieved by the combination the planar type and the glass seal
- Large power dissipation: $P_D = 1$ W
- Wide voltage range: $V_Z = 5.1$ V to 56.0 V
- Easy-to-use because of the finely divided zener voltage ranks, such as A and B ranks

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

| Parameter | Symbol | Rating | Unit |
|---|-----------|-------------|------------------|
| Repetitive peak forward current | I_{FRM} | 400 | mA |
| Total power dissipation *1 | P_{tot} | 1 | W |
| Non-repetitive reverse surge power dissipation *2 | P_{ZSM} | 75 | W |
| Junction temperature | T_j | 200 | $^\circ\text{C}$ |
| Storage temperature | T_{stg} | -55 to +200 | $^\circ\text{C}$ |

Note) *1: With a printed circuit board

*2: $t = 100 \mu\text{s}$, $T_j = 150^\circ\text{C}$

■ Common Electrical Characteristics $T_a = 25^\circ\text{C}$ *1

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---|--------|-----------------------|-----|-----|-----|----------------------|
| Forward voltage | V_F | $I_F = 200$ mA | | | 1 | V |
| Zener voltage *2 | V_Z | I_Z Specified value | | | | V |
| Zener operating resistance | R_Z | I_Z Specified value | | | | Ω |
| Reverse current | I_R | V_R Specified value | | | | μA |
| Temperature coefficient of zener voltage *3 | S_Z | I_Z Specified value | | | | mV/ $^\circ\text{C}$ |
| Terminal capacitance | C_t | V_R Specified value | | | | pF |


Refer to the list of the electrical characteristics within part numbers

Note) 1 .Rated input/output frequency: 5 MHz

2 *1: The V_Z value is for the temperature of 25°C . In other cases, carry out the temperature compensation.

*2: Guaranteed at 20 ms after power application.

*3: $T_j = 25^\circ\text{C}$ to 150°C

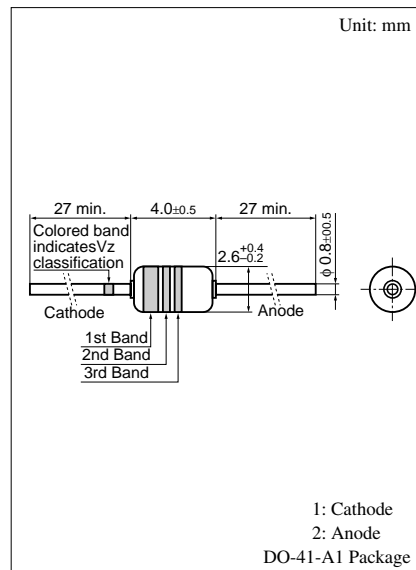

• Color indication of V_Z rank classification

| Rank | A | B |
|-------|------|-----|
| Color | Blue | Red |

Note) The part number in the parenthesis shows conventional part number.




■ Electrical characteristics within part numbers $T_a = 25^\circ\text{C}$









| Part Number | Zener voltage | | | Reverse current | | Zener operating resistance | | Temperature coefficient of zener voltage | | Terminal capacitance | Marking symbol (Color indication) | | | |
|-------------|---------------|-------|------|-------------------------|-----------|----------------------------|------------|--|------------|--|-----------------------------------|--------|--------|-------|
| | V_Z (V) | | | I_R (μA) | | R_Z (Ω) | | S_Z (mV/ $^\circ\text{C}$) | | C_T (pF) ($V_R = 0$ V) $f = 1$ MHz Typ | 1st. | 2nd. | 3rd. | |
| | I_Z (mA) | Min | Nom | Max | V_R (V) | Max | I_Z (mA) | Max | I_Z (mA) | | | | | Typ |
| MAZ2051 | 40 | 4.8 | 5.1 | 5.4 | 1 | 20 | 40 | 10 | 40 | 0 | 200 | Green | Brown | Brown |
| MAZ20510A | | 4.8 | — | 5.15 | | | | | | | | | | |
| MAZ20510B | | 5.05 | — | 5.4 | | | | | | | | | | |
| MAZ2056 | 40 | 5.2 | 5.6 | 6.0 | 2 | 20 | 40 | 8 | 40 | 1.5 | 180 | Green | Blue | Blue |
| MAZ20560A | | 5.3 | — | 5.7 | | | | | | | | | | |
| MAZ20560B | | 5.6 | — | 6.0 | | | | | | | | | | |
| MAZ2062 | 40 | 5.8 | 6.2 | 6.6 | 3 | 20 | 40 | 6 | 40 | 2.4 | 330 | Blue | Red | Red |
| MAZ20620A | | 5.8 | — | 6.2 | | | | | | | | | | |
| MAZ20620B | | 6.1 | — | 6.5 | | | | | | | | | | |
| MAZ2068 | 40 | 6.4 | 6.8 | 7.2 | 3 | 10 | 40 | 6 | 40 | 3.1 | 280 | Blue | Gray | Gray |
| MAZ20680A | | 6.4 | — | 6.8 | | | | | | | | | | |
| MAZ20680B | | 6.7 | — | 7.1 | | | | | | | | | | |
| MAZ2075 | 40 | 7.0 | 7.5 | 7.9 | 3 | 10 | 40 | 5 | 40 | 3.8 | 250 | Purple | Green | Green |
| MAZ20750A | | 7.0 | — | 7.45 | | | | | | | | | | |
| MAZ20750B | | 7.35 | — | 7.8 | | | | | | | | | | |
| MAZ2082 | 40 | 7.7 | 8.2 | 8.7 | 4 | 10 | 40 | 5 | 40 | 4.5 | 230 | Gray | Red | Red |
| MAZ20820A | | 7.7 | — | 8.2 | | | | | | | | | | |
| MAZ20820B | | 8.1 | — | 8.6 | | | | | | | | | | |
| MAZ2091 | 40 | 8.5 | 9.1 | 9.6 | 5 | 10 | 40 | 6 | 40 | 5.4 | 220 | White | Brown | Brown |
| MAZ20910A | | 8.5 | — | 9.05 | | | | | | | | | | |
| MAZ20910B | | 8.95 | — | 9.5 | | | | | | | | | | |
| MAZ2100 | 40 | 9.4 | 10.0 | 10.6 | 7 | 10 | 40 | 6 | 40 | 6.3 | 200 | Brown | Black | — |
| MAZ21000A | | 9.4 | — | 10 | | | | | | | | | | |
| MAZ21000B | | 9.9 | — | 10.5 | | | | | | | | | | |
| MAZ2110 | 20 | 10.4 | 11.0 | 11.6 | 7 | 5 | 20 | 8 | 20 | 7.4 | 160 | Brown | Brown | — |
| MAZ21100A | | 10.4 | — | 11.05 | | | | | | | | | | |
| MAZ21100B | | 10.85 | — | 11.5 | | | | | | | | | | |
| MAZ2120 | 20 | 11.4 | 12.0 | 12.7 | 8 | 5 | 20 | 8 | 20 | 8.4 | 160 | Brown | Red | — |
| MAZ21200A | | 11.4 | — | 12.1 | | | | | | | | | | |
| MAZ21200B | | 11.9 | — | 12.6 | | | | | | | | | | |
| MAZ2130 | 20 | 12.4 | 13.0 | 14.1 | 9 | 5 | 20 | 10 | 20 | 9.4 | 155 | Brown | Orange | — |
| MAZ21300A | | 12.4 | — | 13.25 | | | | | | | | | | |
| MAZ21300B | | 13.15 | — | 14.0 | | | | | | | | | | |
| MAZ2150 | 20 | 13.8 | 15.0 | 15.6 | 10 | 5 | 20 | 12 | 20 | 11.4 | 150 | Brown | Green | — |
| MAZ21500A | | 13.8 | — | 14.7 | | | | | | | | | | |
| MAZ21500B | | 14.5 | — | 15.4 | | | | | | | | | | |
| MAZ2160 | 20 | 15.3 | 16.0 | 17.1 | 11 | 5 | 20 | 12 | 20 | 12.5 | 135 | Brown | Blue | — |
| MAZ21600A | | 15.3 | — | 16.3 | | | | | | | | | | |
| MAZ21600B | | 16.1 | — | 17.1 | | | | | | | | | | |
| MAZ2180 | 20 | 16.8 | 18.0 | 19.1 | 12 | 5 | 20 | 15 | 20 | 14.5 | 110 | Brown | Gray | — |
| MAZ21800A | | 16.8 | — | 18.0 | | | | | | | | | | |
| MAZ21800B | | 17.8 | — | 19.0 | | | | | | | | | | |
| MAZ2200 | 20 | 18.8 | 20.0 | 21.2 | 14 | 5 | 20 | 15 | 20 | 16.6 | 100 | Red | Black | — |
| MAZ22000A | | 18.8 | — | 20.0 | | | | | | | | | | |
| MAZ22000B | | 19.8 | — | 21.0 | | | | | | | | | | |


■ Electrical characteristics within part numbers (continued) $T_a = 25^\circ\text{C}$

| Part number | Zener voltage | | | Reverse current | | Zener operating resistance | | Temperature coefficient of zener voltage | | Terminal capacitance C_t (pF) ($V_R = 0$ V) $f = 1$ MHz Typ | Marking symbol (Color indication) | | | |
|-------------|---------------|-------|------|-------------------------|-----------|----------------------------|------------|--|------------|--|--------------------------------------|--------|--------|---|
| | V_Z (V) | | | I_R (μA) | | R_Z (Ω) | | S_Z (mV/ $^\circ\text{C}$) | | | 1st. | 2nd. | 3rd. | |
| | I_Z (mA) | Min | Nom | Max | V_R (V) | Max | I_Z (mA) | Max | I_Z (mA) | Typ | | | | |
| MAZ2220 | 10 | 20.8 | 22.0 | 23.3 | 15 | 5 | 10 | 20 | 10 | 18.6 | 95 | Red | Red | — |
| MAZ22200A | | 20.8 | — | 22.15 | | | | | | | | | | |
| MAZ22200B | | 21.85 | — | 23.2 | | | | | | | | | | |
| MAZ2240 | 10 | 22.8 | 24.0 | 25.6 | 16 | 5 | 10 | 20 | 10 | 20.7 | 90 | Red | Yellow | — |
| MAZ22400A | | 22.8 | — | 24.35 | | | | | | | | | | |
| MAZ22400B | | 24.15 | — | 25.6 | | | | | | | | | | |
| MAZ2270 | 10 | 25.1 | 27.0 | 28.9 | 18 | 2 | 10 | 25 | 10 | 23.8 | 85 | Red | Purple | — |
| MAZ22700A | | 25.1 | — | 27.0 | | | | | | | | | | |
| MAZ22700B | | 26.9 | — | 28.9 | | | | | | | | | | |
| MAZ2300 | 10 | 28.0 | 30.0 | 32.0 | 20 | 2 | 10 | 25 | 10 | 26.9 | 80 | Orange | Black | — |
| MAZ23000A | | 28.0 | — | 30.1 | | | | | | | | | | |
| MAZ23000B | | 29.9 | — | 32.0 | | | | | | | | | | |
| MAZ2330 | 10 | 31.0 | 33.0 | 35.0 | 22 | 2 | 10 | 30 | 10 | 30.0 | 75 | Orange | Orange | — |
| MAZ23300A | | 31.0 | — | 33.14 | | | | | | | | | | |
| MAZ23300B | | 32.86 | — | 35.0 | | | | | | | | | | |
| MAZ2360 | 10 | 34.0 | 36.0 | 38.0 | 24 | 2 | 10 | 30 | 10 | 33.4 | 70 | Orange | Blue | — |
| MAZ23600A | | 34.0 | — | 36.16 | | | | | | | | | | |
| MAZ23600B | | 35.84 | — | 38.0 | | | | | | | | | | |
| MAZ2390 | 10 | 37.0 | 39.0 | 41.0 | 26 | 5 | 10 | 50 | 10 | 36.3 | 65 | Orange | White | — |
| MAZ2430 | 10 | 40.0 | 43.0 | 46.0 | 29 | 5 | 10 | 50 | 10 | 41.1 | 60 | Yellow | Orange | — |
| MAZ2470 | 10 | 44.0 | 47.0 | 50.0 | 31 | 5 | 10 | 50 | 10 | 44.9 | 55 | Yellow | Purple | — |
| MAZ2510 | 10 | 48.0 | 51.0 | 54.0 | 33 | 5 | 10 | 50 | 10 | 48.6 | 50 | Green | Brown | — |
| MAZ2560 | 10 | 52.0 | 56.0 | 60.0 | 35 | 5 | 10 | 50 | 10 | 54.9 | 45 | Green | Blue | — |

- Note) 1. The V_Z value is the one after power application for 20 ms at $T_a = 25^\circ\text{C}$.
 2. The zener voltage temperature coefficient is the one for $T_j = 25^\circ\text{C}$ to 150°C .

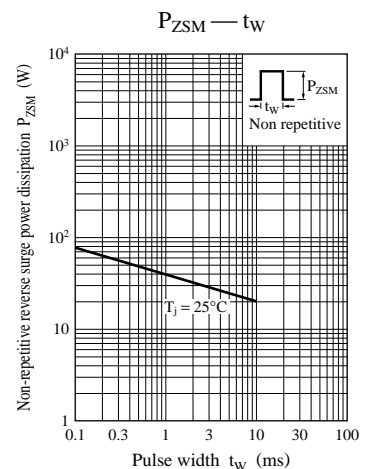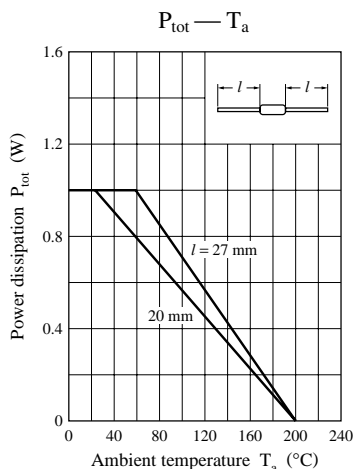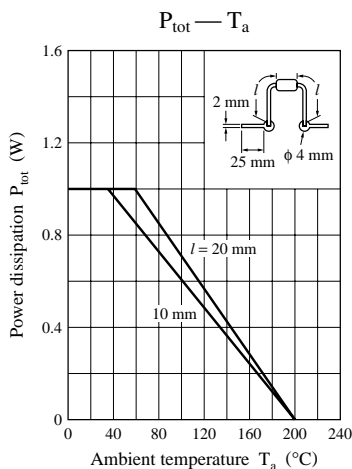

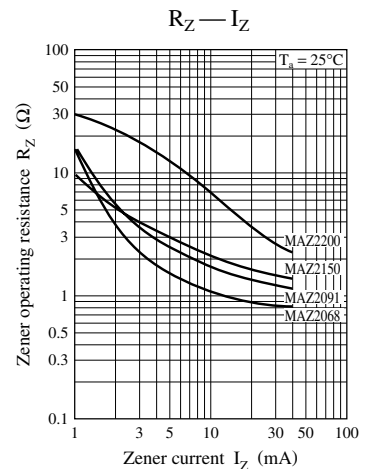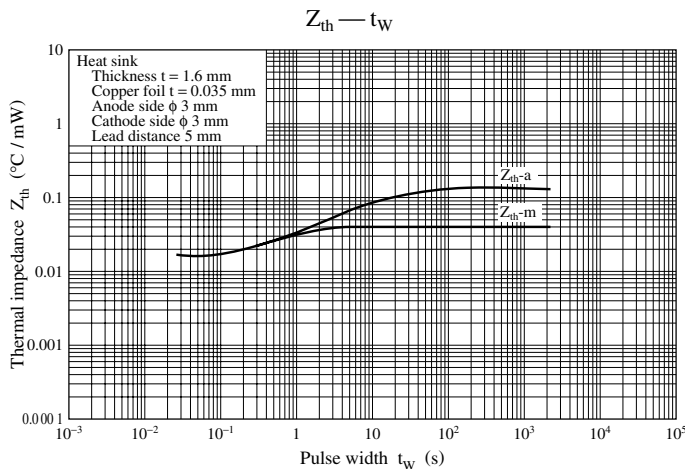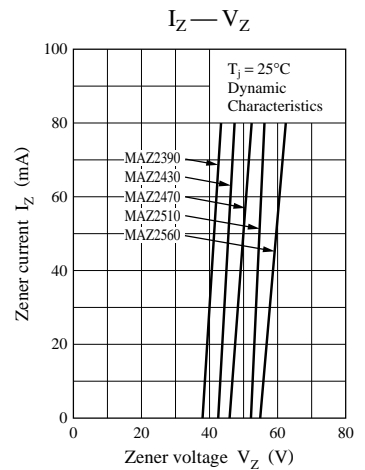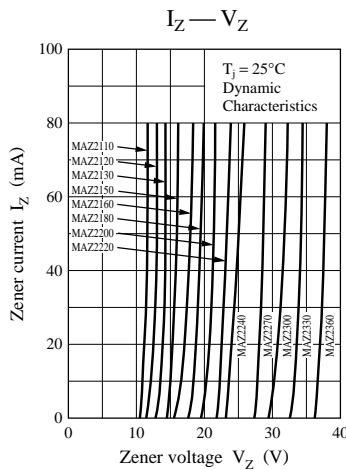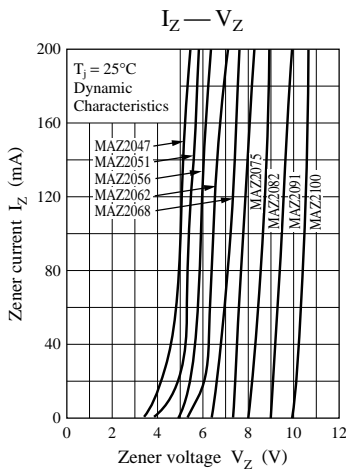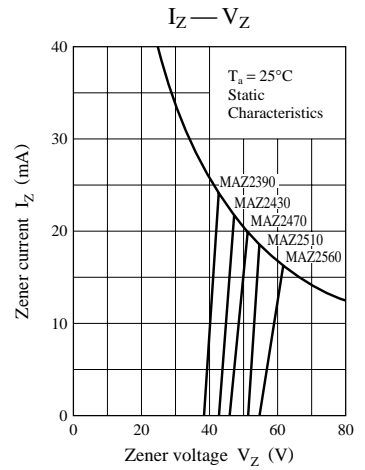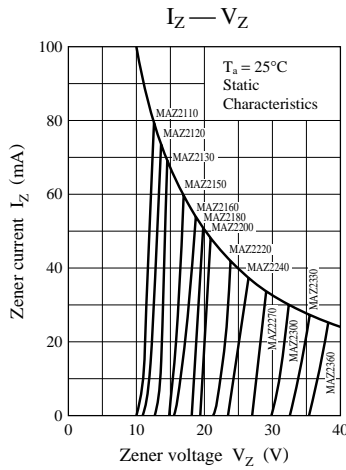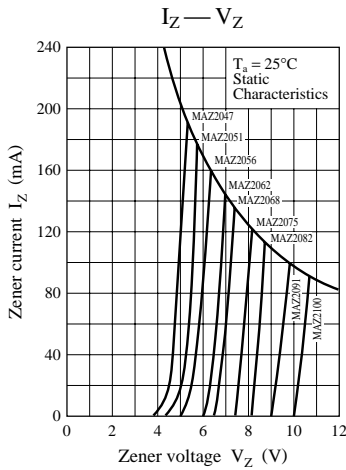

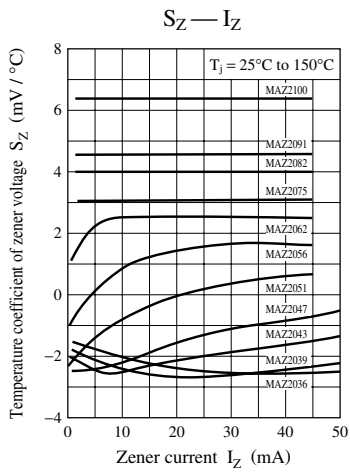

Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuit examples of the products. It does not constitute the warranting of industrial property, the granting of relative rights, or the granting of any license.
- (3) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this material are subject to change without notice for reasons of modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, redundant design is recommended, so that such equipment may not violate relevant laws or regulations because of the function of our products.
- (6) When using products for which dry packing is required, observe the conditions (including shelf life and after-unpacking standby time) agreed upon when specification sheets are individually exchanged.
- (7) No part of this material may be reprinted or reproduced by any means without written permission from our company.

Please read the following notes before using the datasheets

- A. These materials are intended as a reference to assist customers with the selection of Panasonic semiconductor products best suited to their applications.
Due to modification or other reasons, any information contained in this material, such as available product types, technical data, and so on, is subject to change without notice.
Customers are advised to contact our semiconductor sales office and obtain the latest information before starting precise technical research and/or purchasing activities.
- B. Panasonic is endeavoring to continually improve the quality and reliability of these materials but there is always the possibility that further rectifications will be required in the future. Therefore, Panasonic will not assume any liability for any damages arising from any errors etc. that may appear in this material.
- C. These materials are solely intended for a customer's individual use.
Therefore, without the prior written approval of Panasonic, any other use such as reproducing, selling, or distributing this material to a third party, via the Internet or in any other way, is prohibited.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to
 Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.