


UNR211600L Datasheet

www.digi-electronics.com

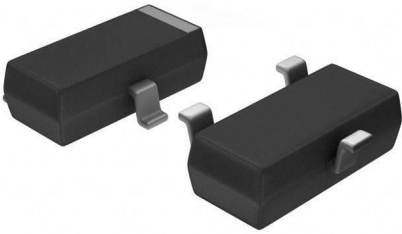

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	UNR211600L-DG
Manufacturer	Panasonic Electronic Components
Manufacturer Product Number	UNR211600L
Description	TRANS PREBIAS PNP 50V 0.1A MINI3
Detailed Description	Pre-Biased Bipolar Transistor (BJT) PNP - Pre-Biased 50 V 100 mA 80 MHz 200 mW Surface Mount Mini 3-G1



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

UNR211600L

Series:

-

Transistor Type:

PNP - Pre-Biased

Voltage - Collector Emitter Breakdown (Max):

50 V

DC Current Gain (hFE) (Min) @ Ic, Vce:

160 @ 5mA, 10V

Current - Collector Cutoff (Max):

500nA

Power - Max:

200 mW

Package / Case:

TO-236-3, SC-59, SOT-23-3

Base Product Number:

UNR211

Manufacturer:

Panasonic Electronic Components

Product Status:

Obsolete

Current - Collector (Ic) (Max):

100 mA

Resistor - Base (R1):

4.7 kOhms

Vce Saturation (Max) @ Ib, Ic:

250mV @ 300μA, 10mA

Frequency - Transition:

80 MHz

Mounting Type:

Surface Mount

Supplier Device Package:

Mini3-G1

Environmental & Export classification

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8541.21.0095

ECCN:

EAR99

UNR211x Series (UN211x Series)

Silicon PNP epitaxial planar type

For digital circuits

■ Features


- Costs can be reduced through downsizing of the equipment and reduction of the number of parts
- Mini type package allowing easy automatic insertion through tape packing and magazine packing

■ Resistance by Part Number


	Marking Symbol (R ₁)	(R ₂)
• UNR2110 (UN2110)	6L	47 kΩ —
• UNR2111 (UN2111)	6A	10 kΩ 10 kΩ
• UNR2112 (UN2112)	6B	22 kΩ 22 kΩ
• UNR2113 (UN2113)	6C	47 kΩ 47 kΩ
• UNR2114 (UN2114)	6D	10 kΩ 47 kΩ
• UNR2115 (UN2115)	6E	10 kΩ —
• UNR2116 (UN2116)	6F	4.7 kΩ —
• UNR2117 (UN2117)	6H	22 kΩ —
• UNR2118 (UN2118)	6I	0.51 kΩ 5.1 kΩ
• UNR2119 (UN2119)	6K	1 kΩ 10 kΩ
• UNR211D (UN211D)	6M	47 kΩ 10 kΩ
• UNR211E (UN211E)	6N	47 kΩ 22 kΩ
• UNR211F (UN211F)	6O	4.7 kΩ 10 kΩ
• UNR211H (UN211H)	6P	2.2 kΩ 10 kΩ
• UNR211L (UN211L)	6Q	4.7 kΩ 4.7 kΩ
• UNR211M (UN211M)	EI	2.2 kΩ 47 kΩ
• UNR211N (UN211N)	EW	4.7 kΩ 47 kΩ
• UNR211T (UN211T)	EY	22 kΩ 47 kΩ
• UNR211V (UN211V)	FC	2.2 kΩ 2.2 kΩ
• UNR211Z (UN211Z)	FE	4.7 kΩ 22 kΩ

■ Absolute Maximum Ratings T_a = 25°C

Parameter	Symbol	Rating	Unit
Collector-base voltage (Emitter open)	V _{CBO}	-50	V
Collector-emitter voltage (Base open)	V _{CEO}	-50	V
Collector current	I _C	-100	mA
Total power dissipation	P _T	200	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55 to +150	°C

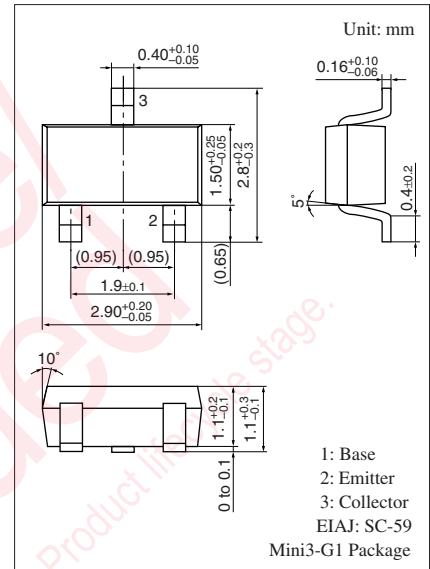

Internal Connection

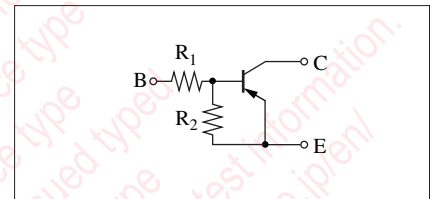

(Note) The part numbers in the parenthesis show conventional part number.

■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit	
Collector-base voltage (Emitter open)	V_{CBO}	$I_C = -10 \mu\text{A}, I_E = 0$	-50			V	
Collector-emitter voltage (Base open)	V_{CEO}	$I_C = -2 \text{mA}, I_B = 0$	-50			V	
Collector-base cutoff current (Emitter open)	I_{CBO}	$V_{CB} = -50 \text{V}, I_E = 0$			-0.1	μA	
Collector-emitter cutoff current (Base open)	I_{CEO}	$V_{CE} = -50 \text{V}, I_B = 0$			-0.5	μA	
Emitter-base cutoff current (Collector open)	UNR2110/2115/2116/2117	I_{EBO}	$V_{EB} = -6 \text{V}, I_C = 0$			-0.01	mA
	UNR2113					-0.1	
	UNR2112/2114/211D/ 211E/211M/211N/211T					-0.2	
	UNR211Z					-0.4	
	UNR2111					-0.5	
	UNR211F/211H					-1.0	
	UNR2119					-1.5	
	UNR2118/211L/211V					-2.0	
Forward current transfer ratio	UNR211V	h_{FE}	$V_{CE} = -10 \text{V}, I_C = -5 \text{mA}$	6		20	—
	UNR2118/211L			20			
	UNR2119/211D/211F/211H			30			
	UNR2111			35			
	UNUNR2112/211E			60			
	UNR211Z			60		200	
	UNR2113/2114/211M			80			
	UNR211N/211T			80		400	
	UNR2110*/2115*/2116*/2117*			160		460	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -10 \text{mA}, I_B = -0.3 \text{mA}$			-0.25	V	
	UNR211V		$I_C = -10 \text{mA}, I_B = -1.5 \text{mA}$				
Output voltage high-level	V_{OH}	$V_{CC} = -5 \text{V}, V_B = -0.5 \text{V}, R_L = 1 \text{k}\Omega$	-4.9			V	
Output voltage low-level	V_{OL}	$V_{CC} = -5 \text{V}, V_B = -2.5 \text{V}, R_L = 1 \text{k}\Omega$			-0.2	V	
			UNR2113	$V_{CC} = -5 \text{V}, V_B = -3.5 \text{V}, R_L = 1 \text{k}\Omega$			
			UNR211D	$V_{CC} = -5 \text{V}, V_B = -10 \text{V}, R_L = 1 \text{k}\Omega$			
			UNR211E	$V_{CC} = -5 \text{V}, V_B = -6 \text{V}, R_L = 1 \text{k}\Omega$			
Transition frequency	f_T	$V_{CB} = -10 \text{V}, I_E = 1 \text{mA}, f = 200 \text{MHz}$		80		MHz	
		$V_{CB} = -10 \text{V}, I_E = 2 \text{mA}, f = 200 \text{MHz}$		150			
Input resistance	R_i		-30%	0.51	+30%	k Ω	
				UNR2119			1.0
				UNR211H/211M/211V			2.2
				UNR2116/211F/211L/211N/211Z			4.7
				UNR2111/2114/2115			10
				UNR2112/2117/211T			22
				UNR2110/2113/211D/211E			47

Note) 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.

2. *: Rank classification


Rank	Q	R	S	No-rank
h_{FE}	160 to 260	210 to 340	290 to 460	160 to 460

■ Electrical Characteristics (continued) $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$




Parameter		Symbol	Conditions	Min	Typ	Max	Unit
Resistance ratio	UNR211M	R_1/R_2			0.047		—
	UNR211N				0.1		
	UNR2118/2119			0.08	0.10	0.12	
	UNR211Z				0.21		
	UNR2114			0.17	0.21	0.25	
	UNR211H			0.17	0.22	0.27	
	UNR211T				0.47		
	UNR211F			0.37	0.47	0.57	
	UNR211V				1.0		
	UNR2111/2112/2113/211L			0.8	1.0	1.2	
	UNR211E			1.70	2.14	2.60	
	UNR211D			3.7	4.7	5.7	




Note) Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.

Common characteristics chart






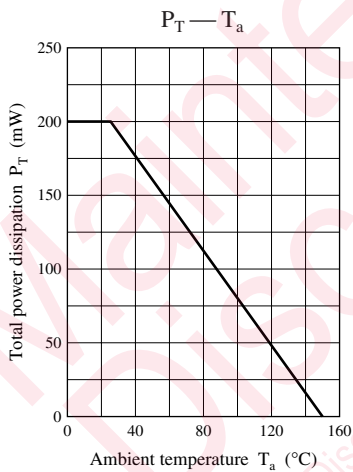


Characteristics charts of UNR2110




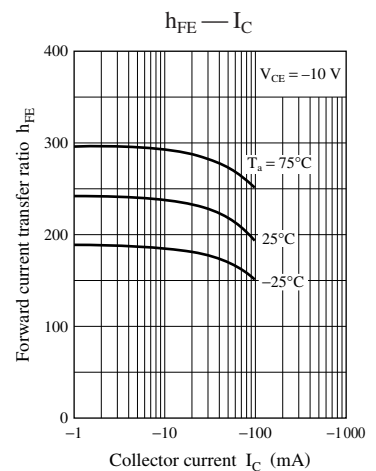
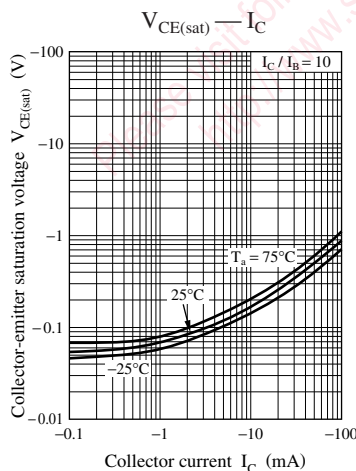
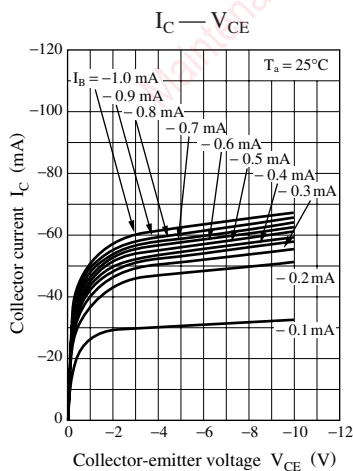


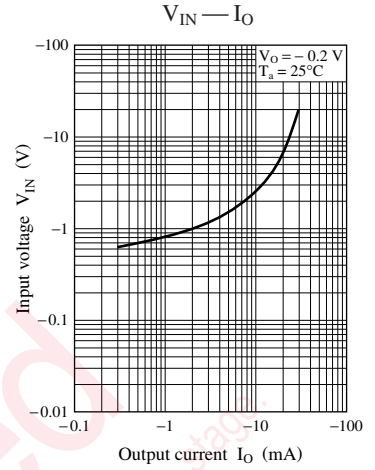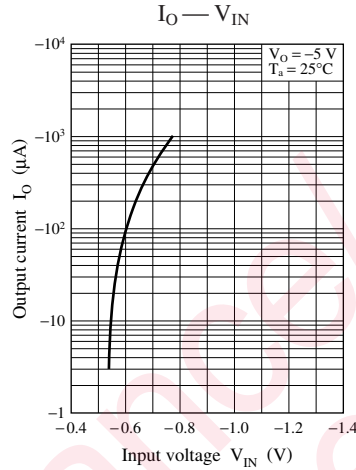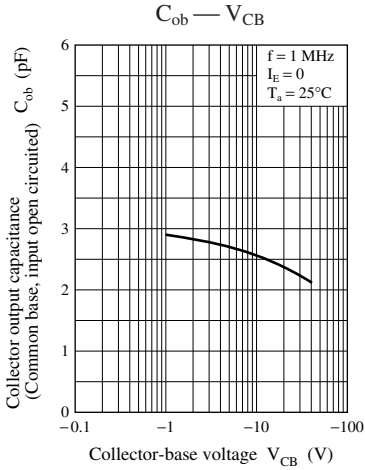




Characteristics charts of UNR2111

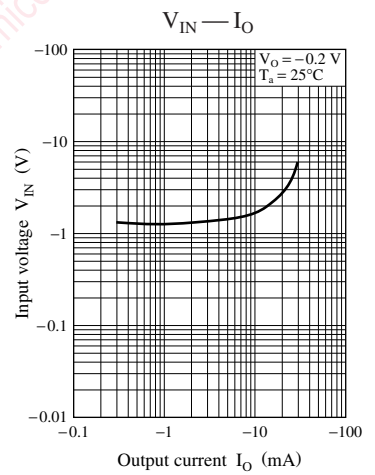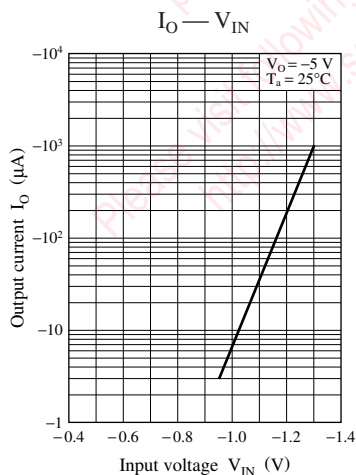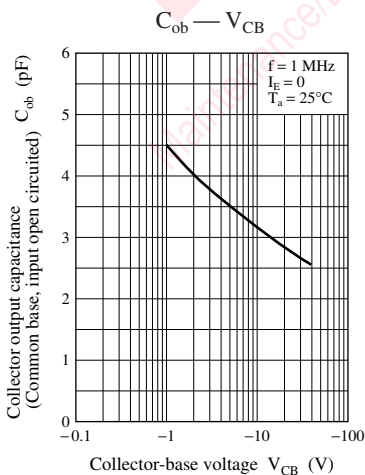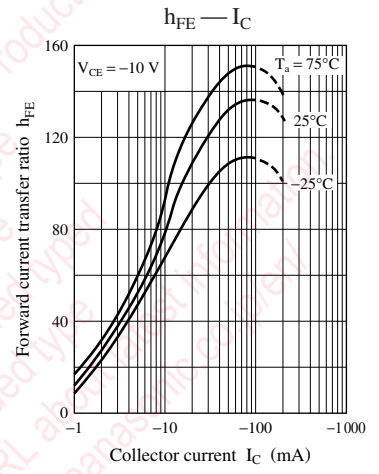
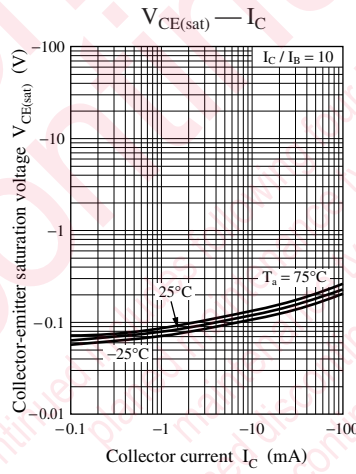
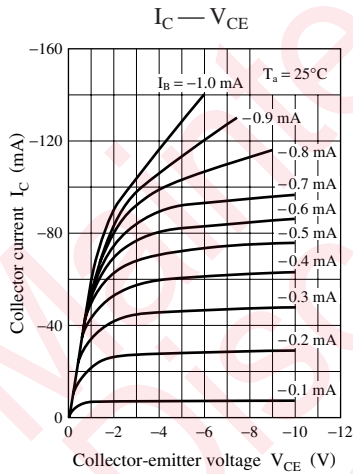


Characteristics charts of UNR2112

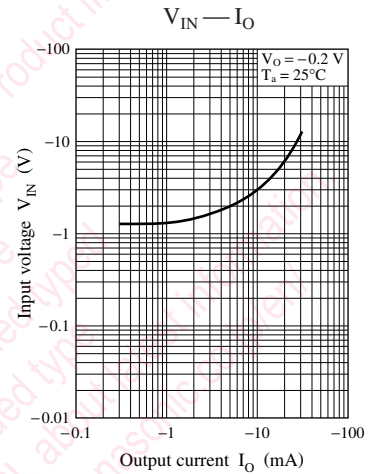
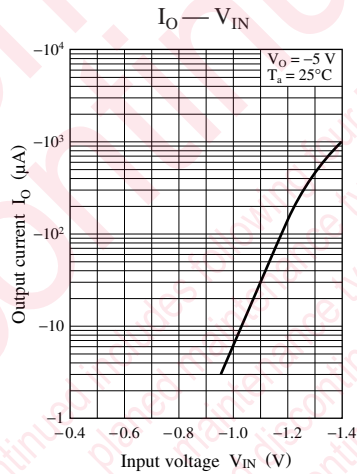
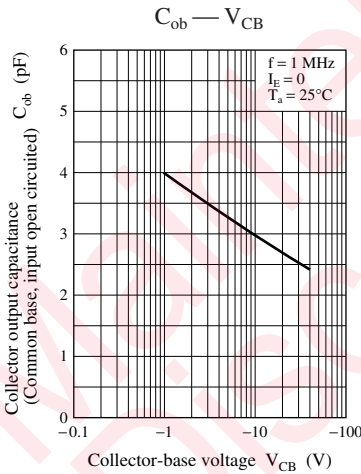
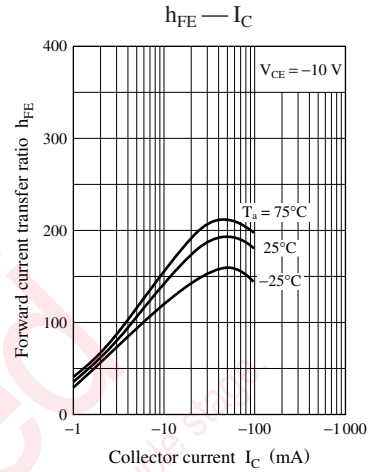
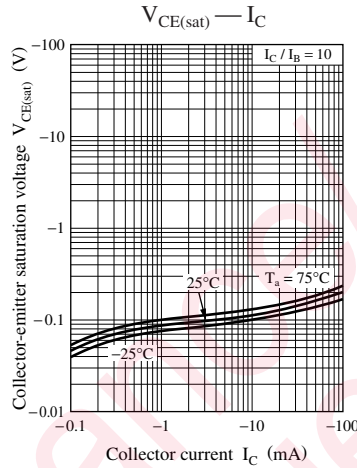
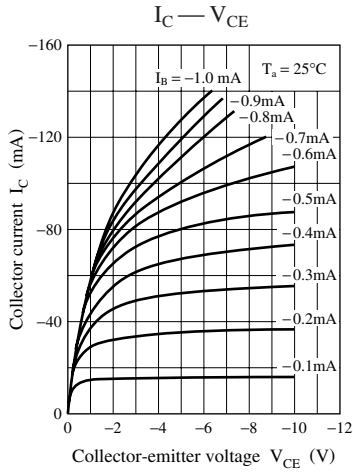


Characteristics charts of UNR2113




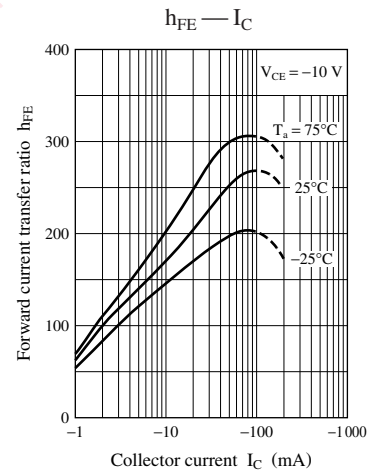
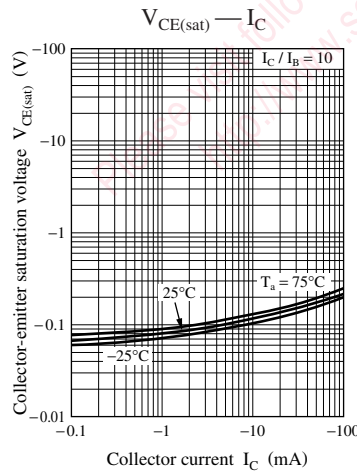
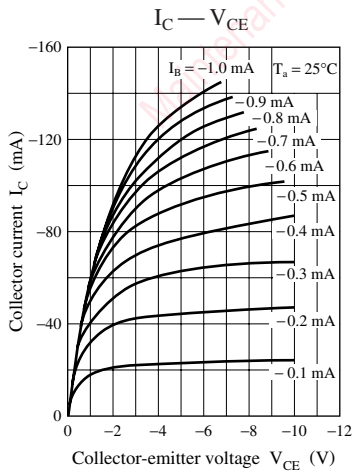


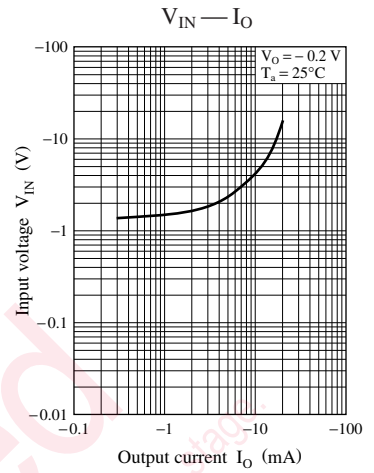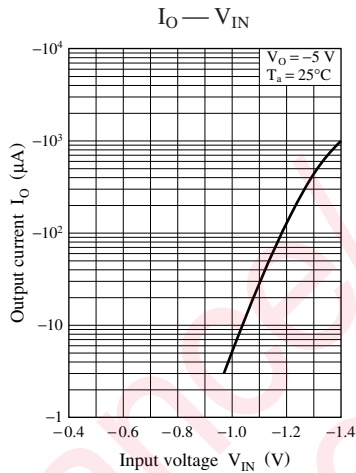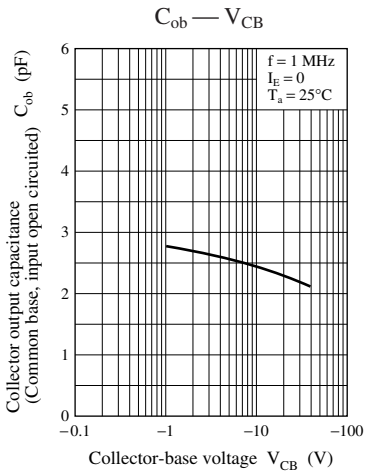




Characteristics charts of UNR2114

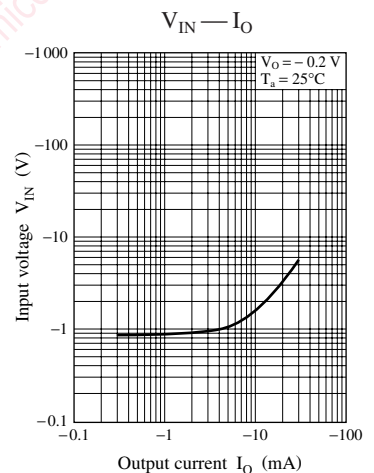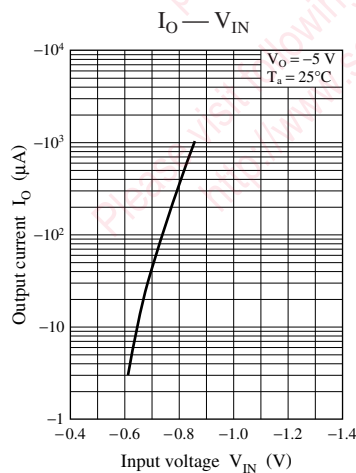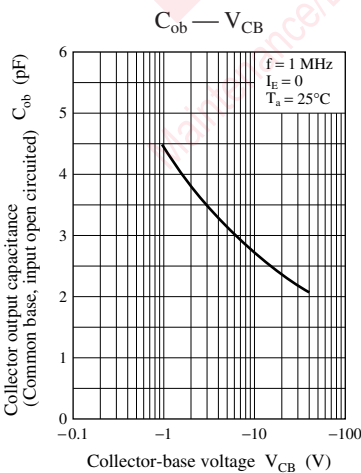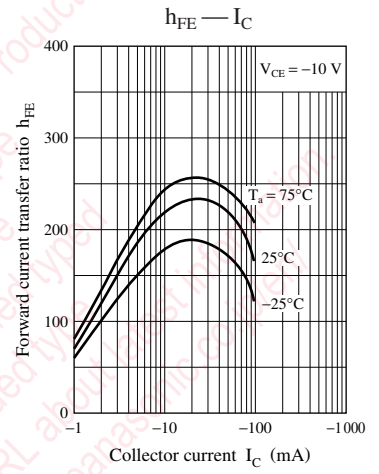
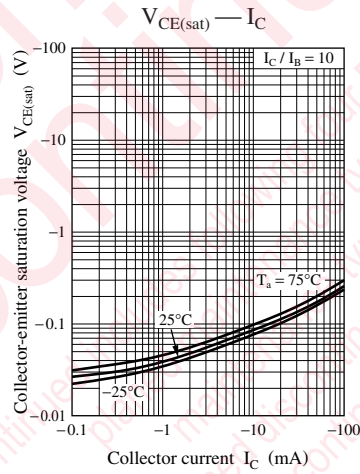
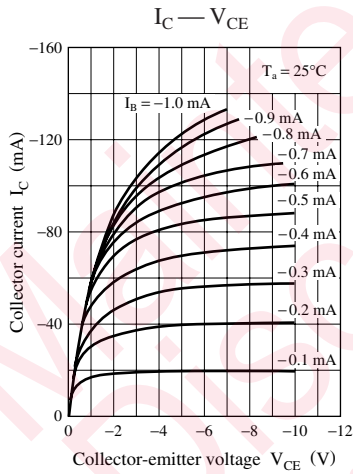


Characteristics charts of UNR2115

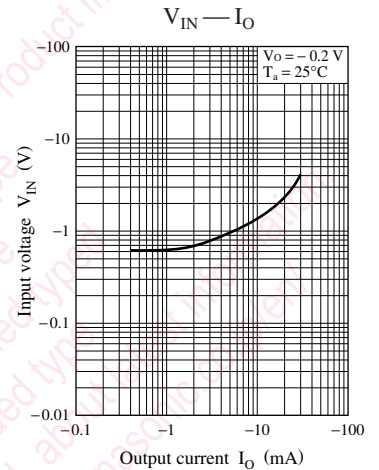
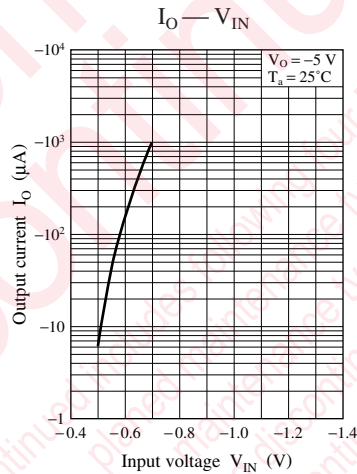
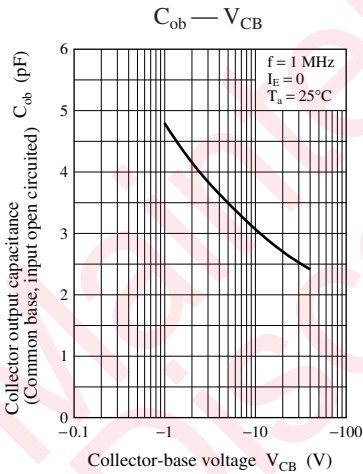
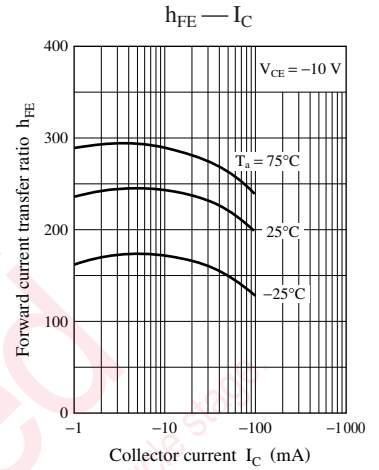
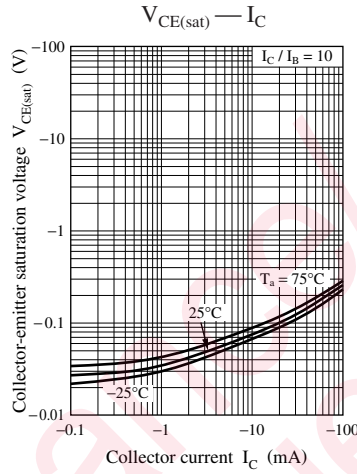
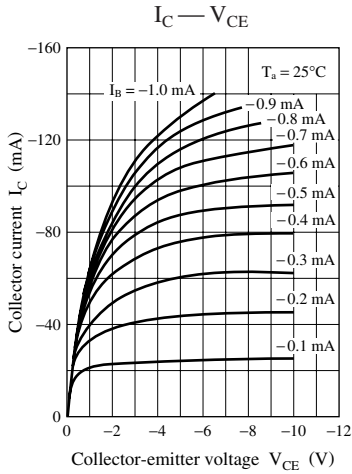


Characteristics charts of UNR2116




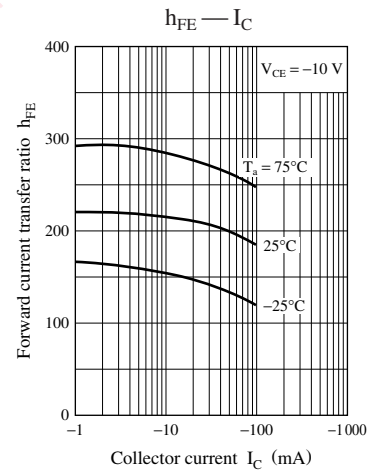
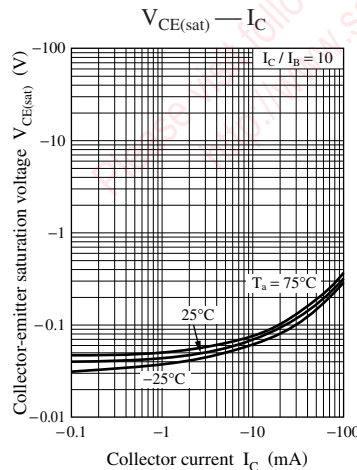
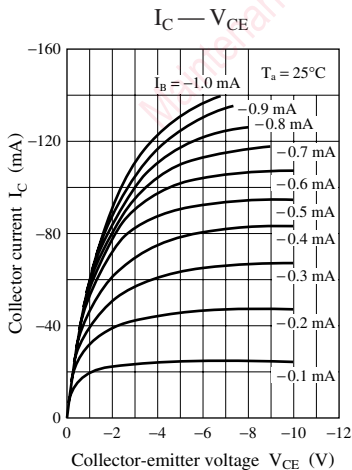


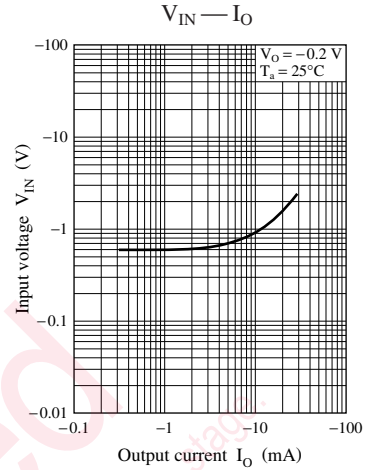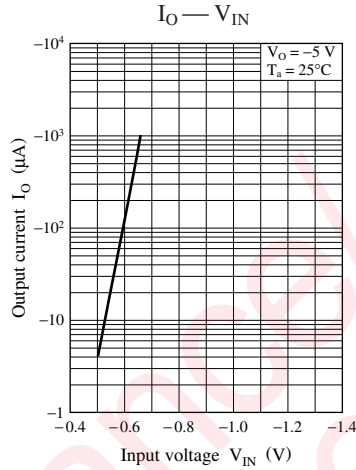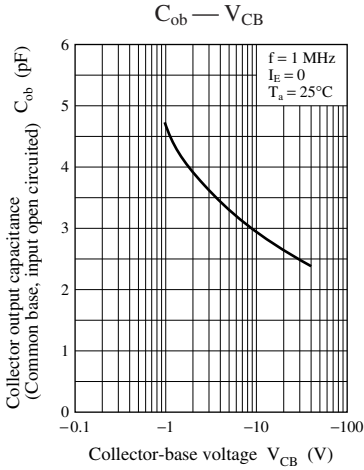




Characteristics charts of UNR2117

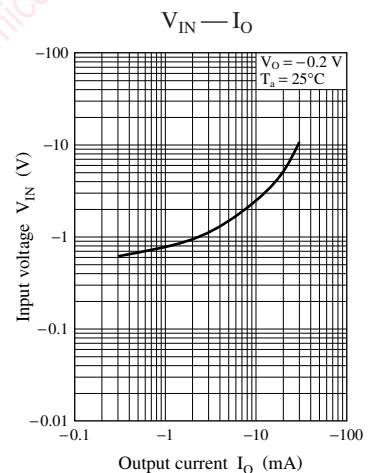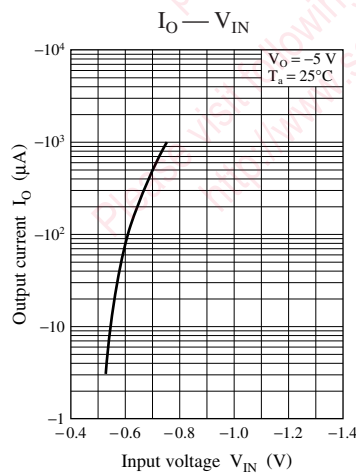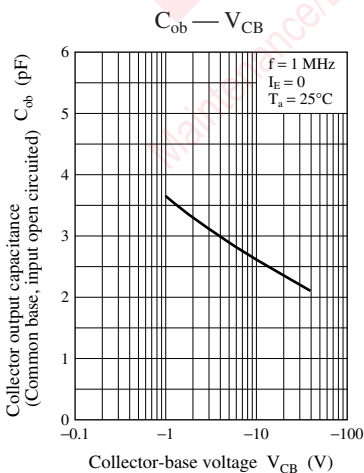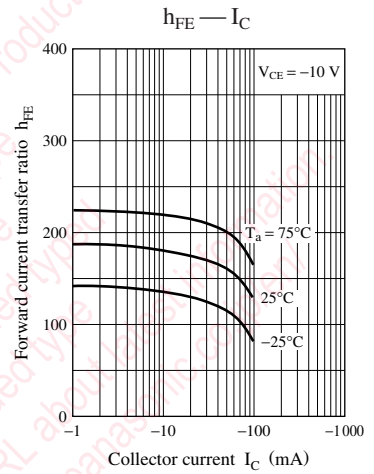
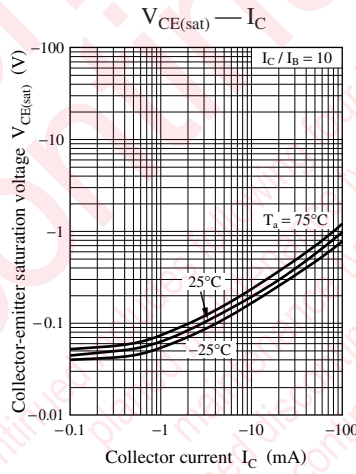
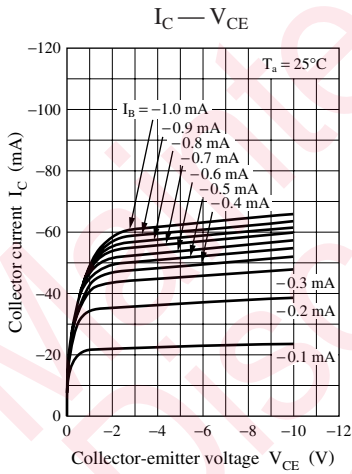


Characteristics charts of UNR2118

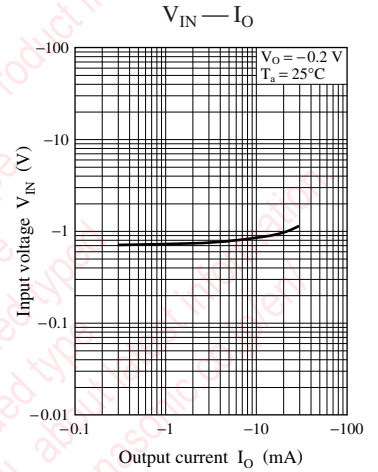
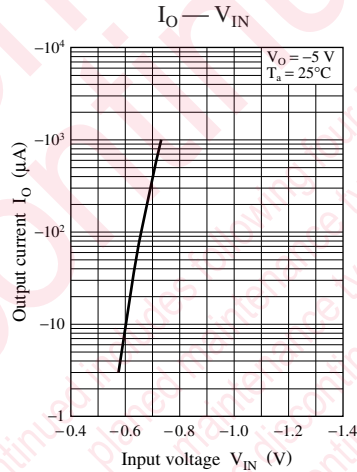
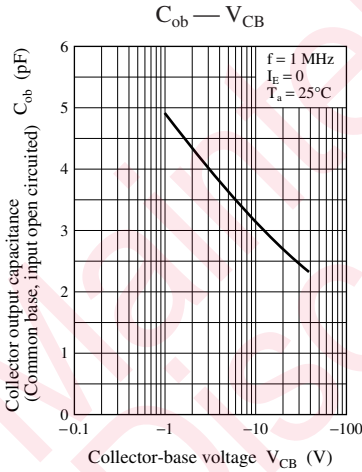
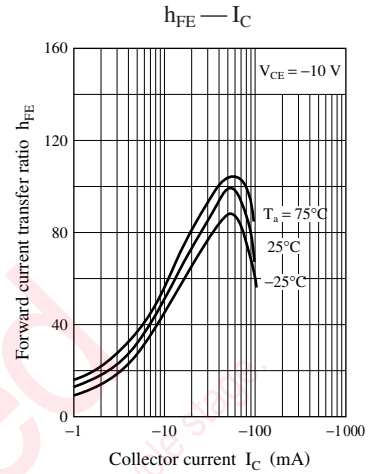
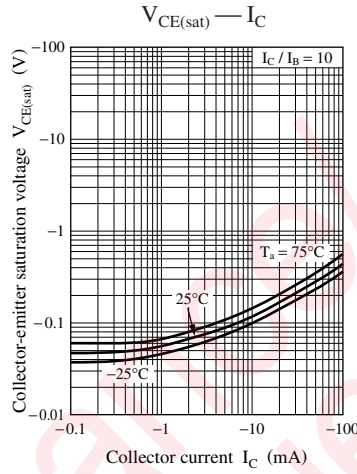
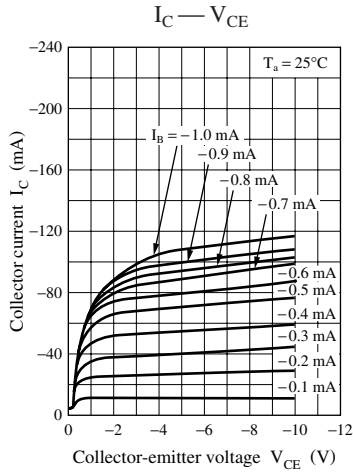


Characteristics charts of UNR2119




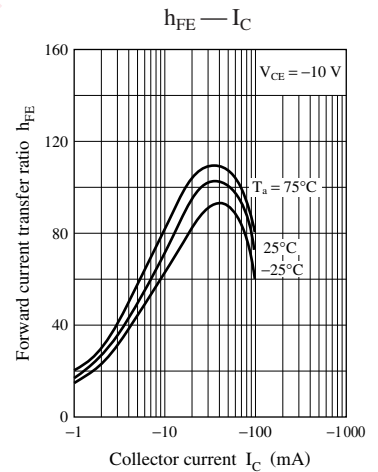
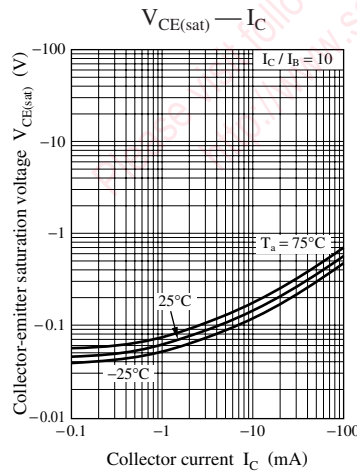
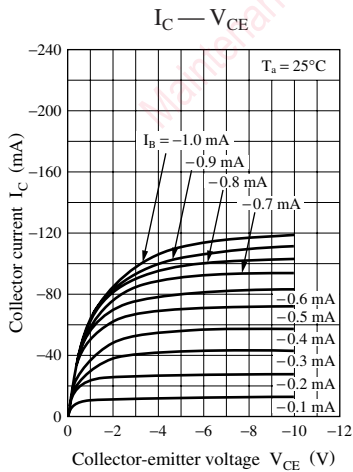


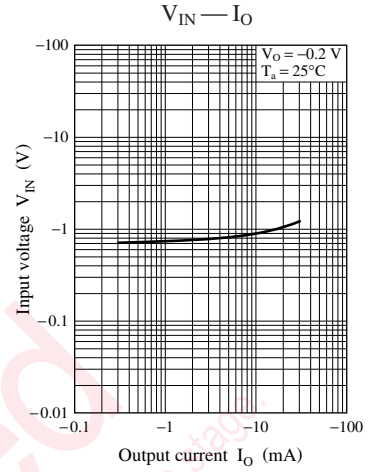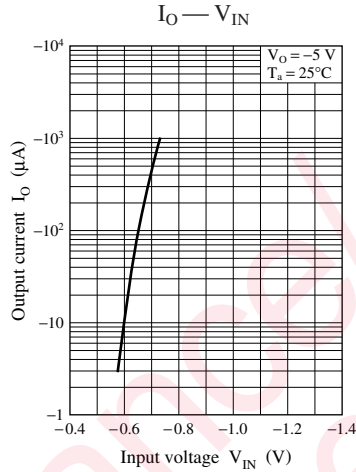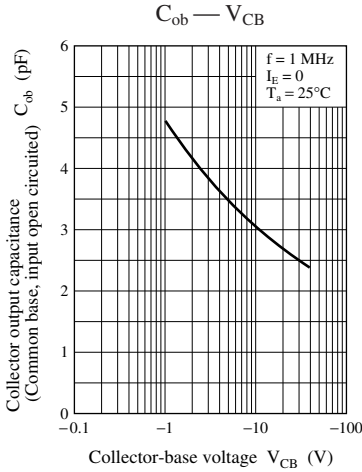




Characteristics charts of UNR211D

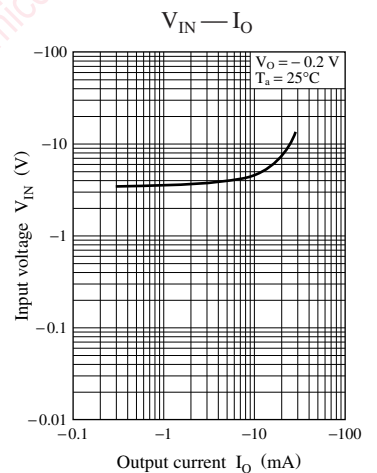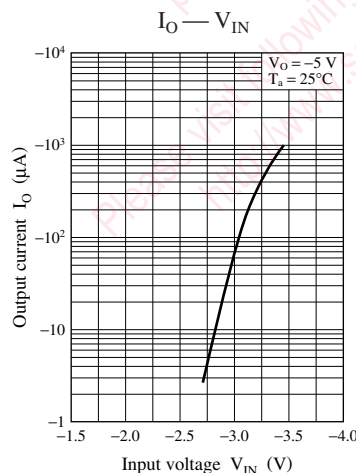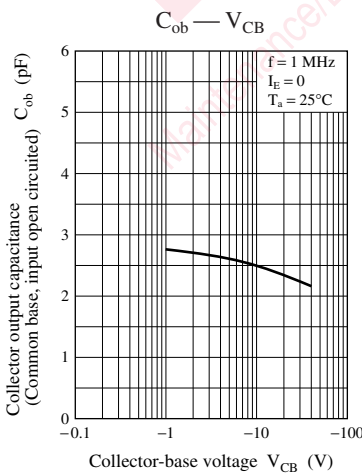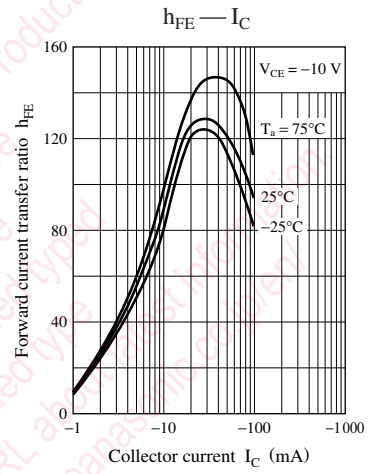
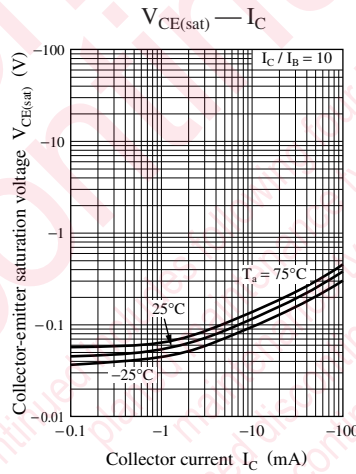
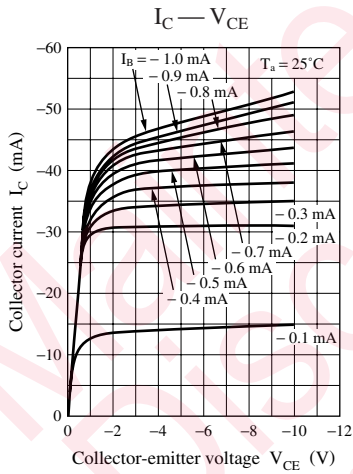


Characteristics charts of UNR211E

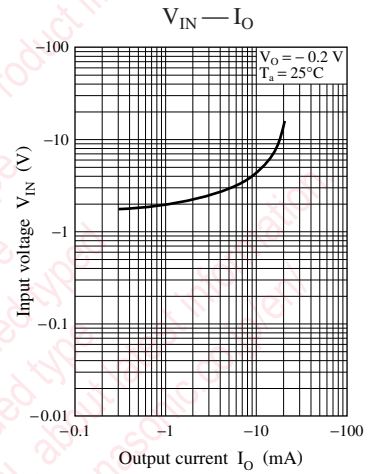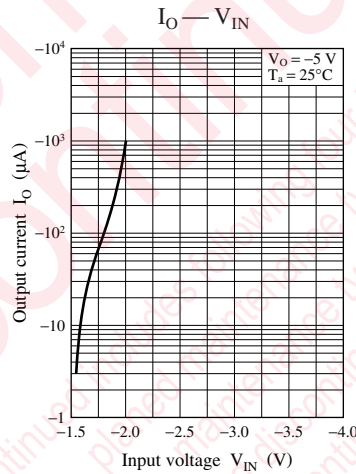
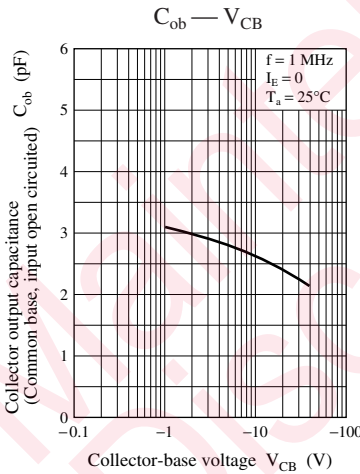
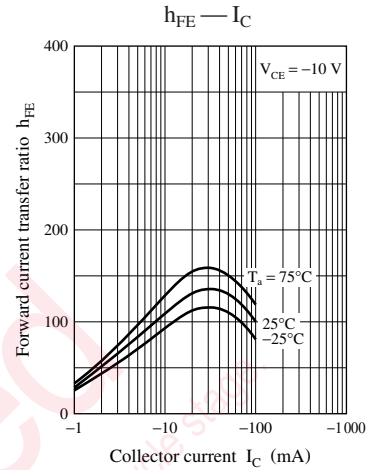
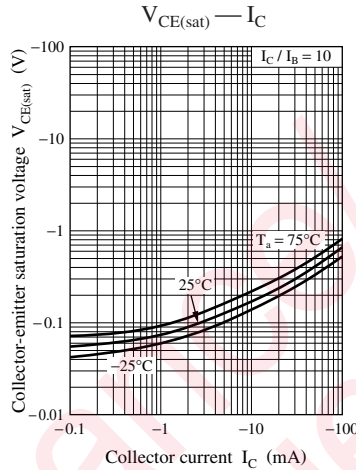
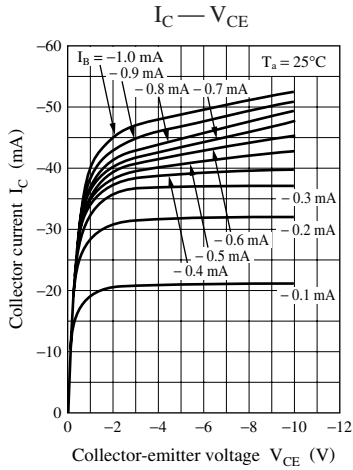


Characteristics charts of UNR211F



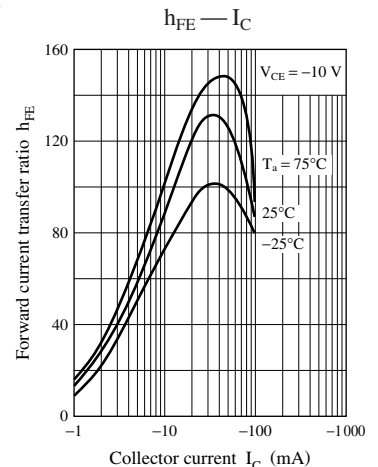
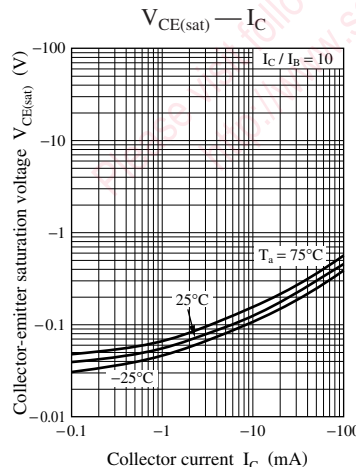
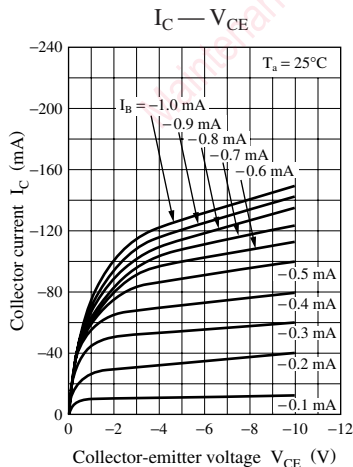


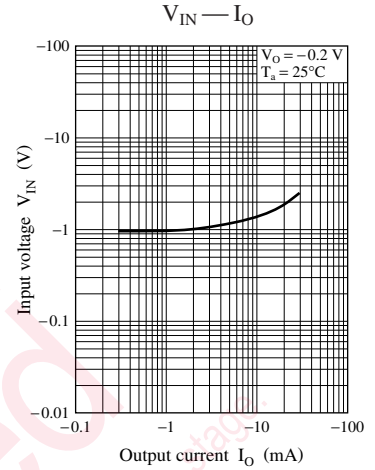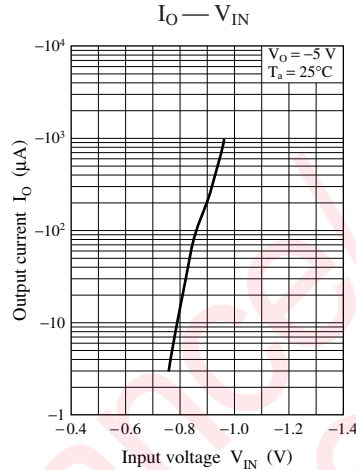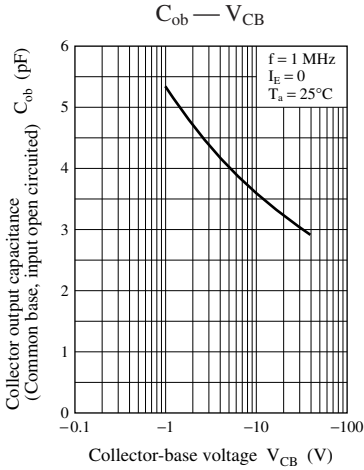




Characteristics charts of UNR211H

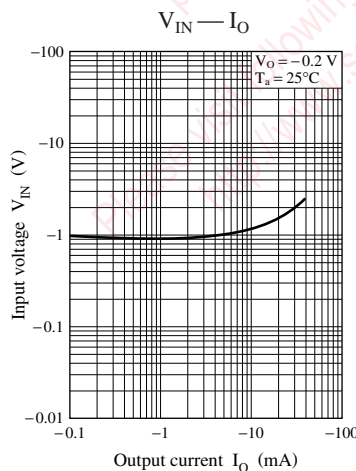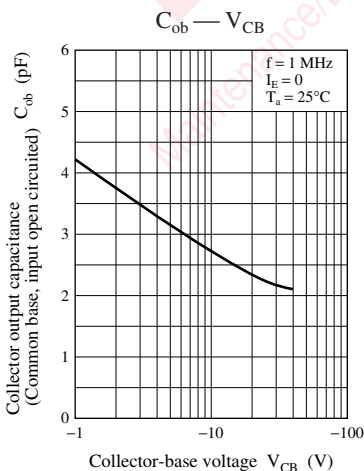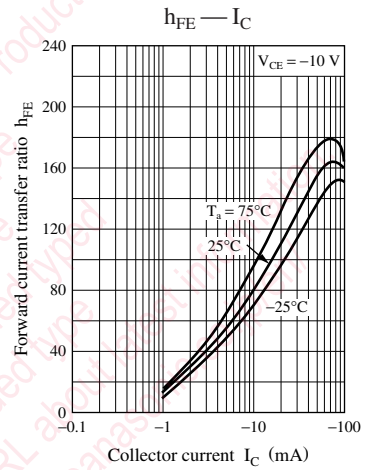
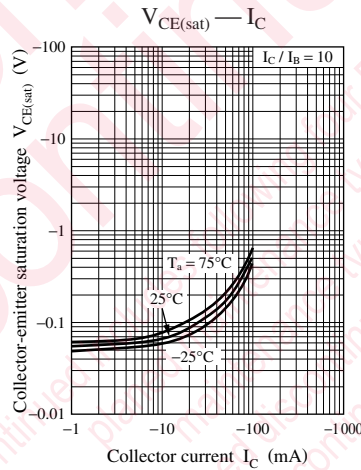
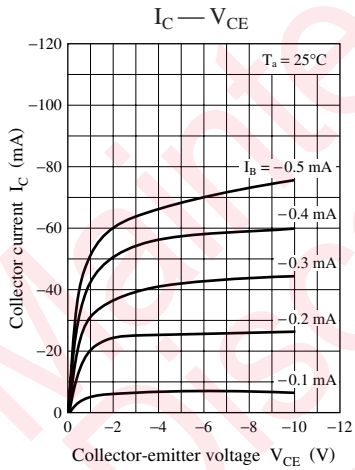


Characteristics charts of UNR211L


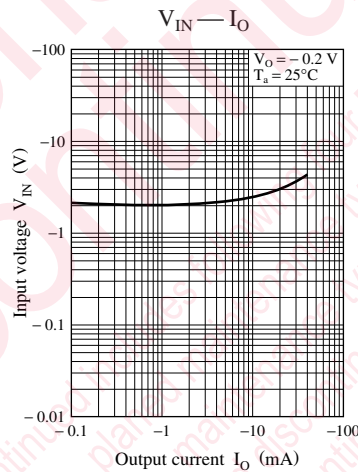
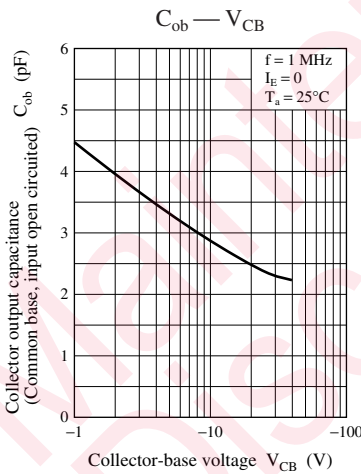
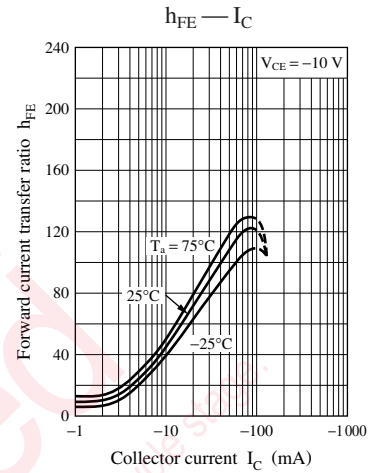
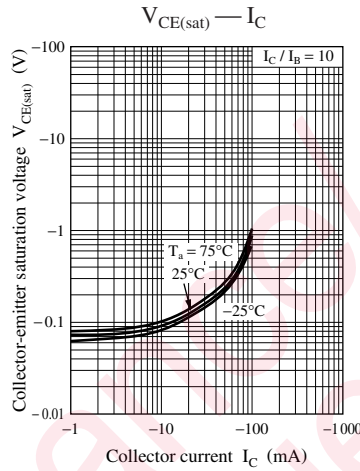
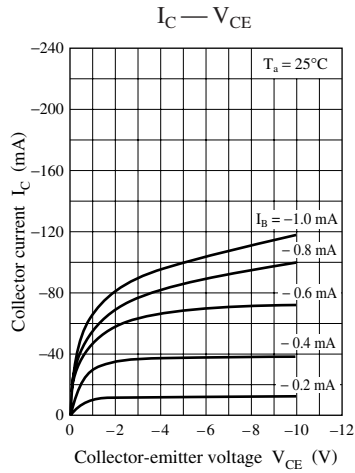


Characteristics charts of UNR211M



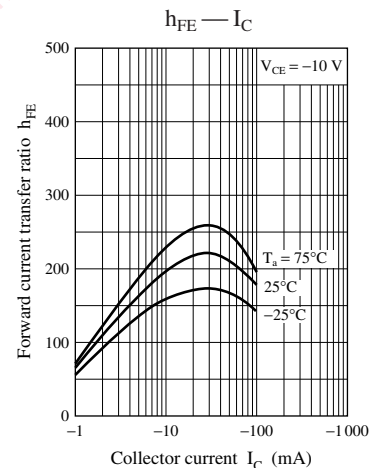
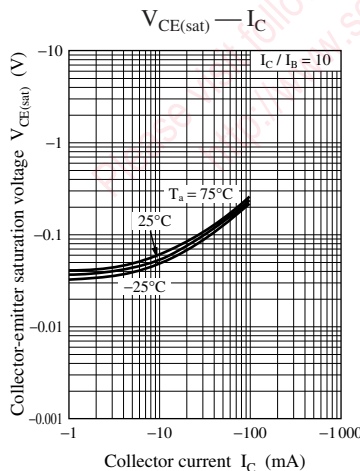
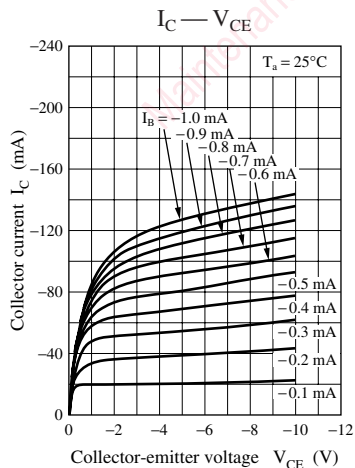


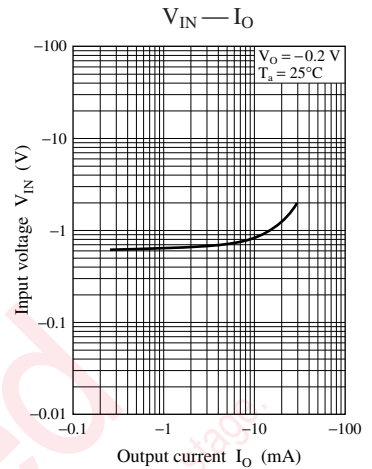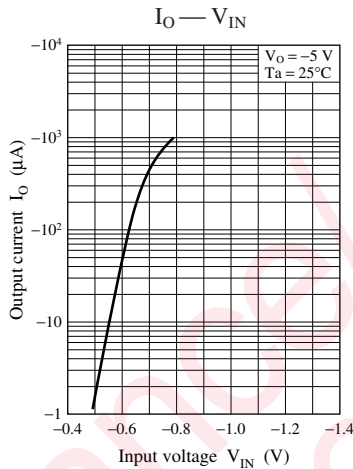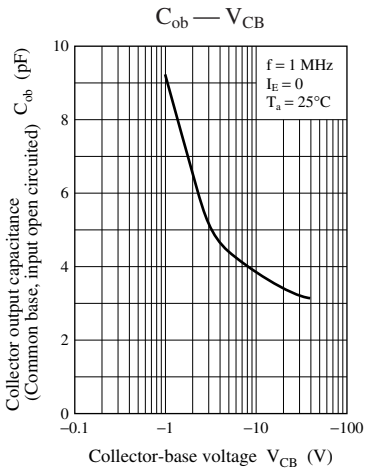




Characteristics charts of UNR211N

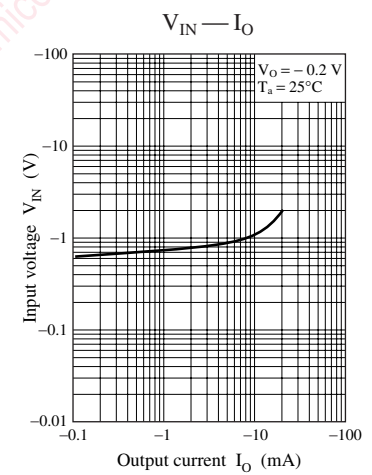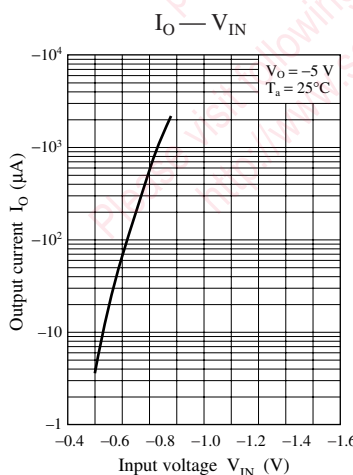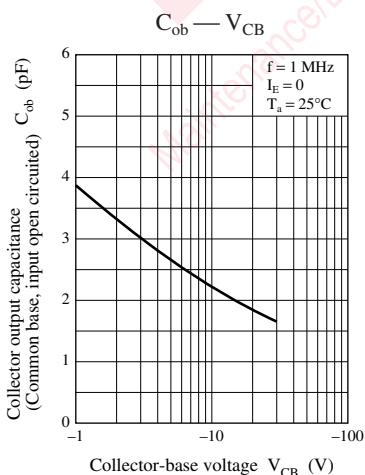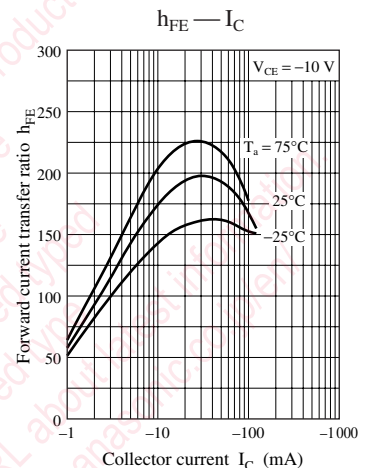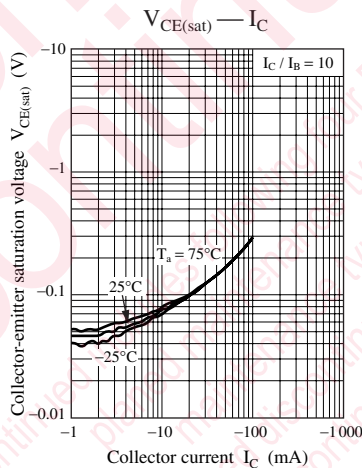
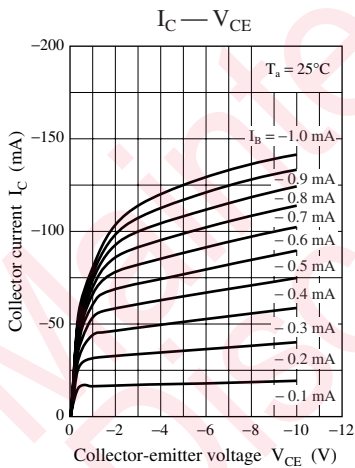


Characteristics charts of UNR211T


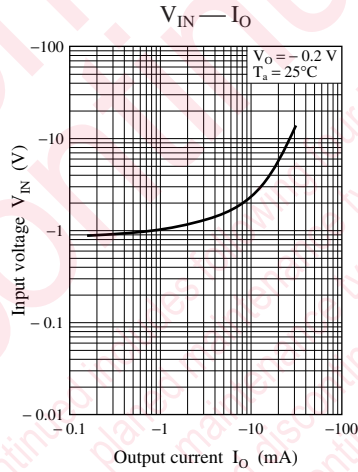
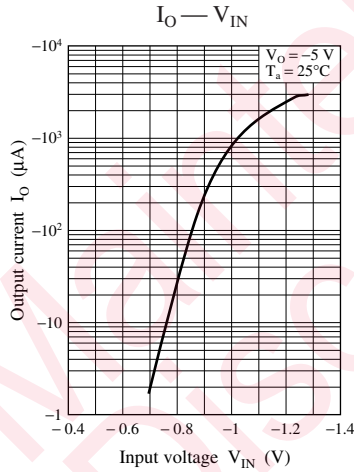
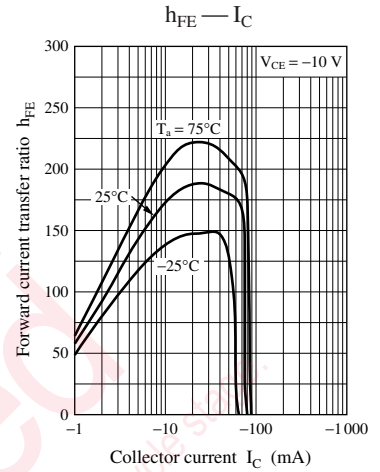
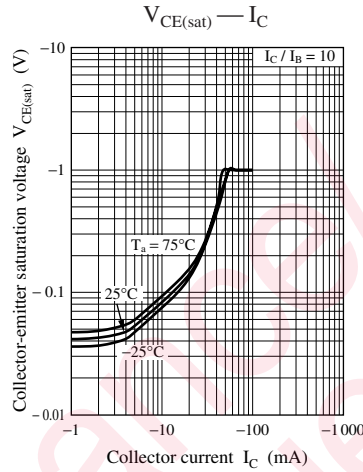
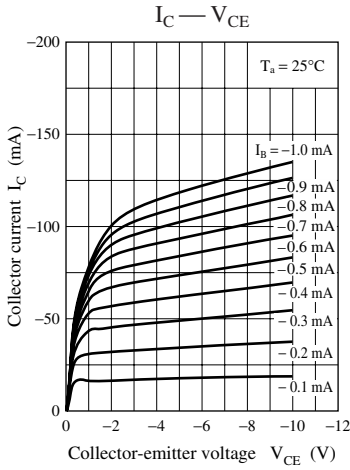


Characteristics charts of UNR211V

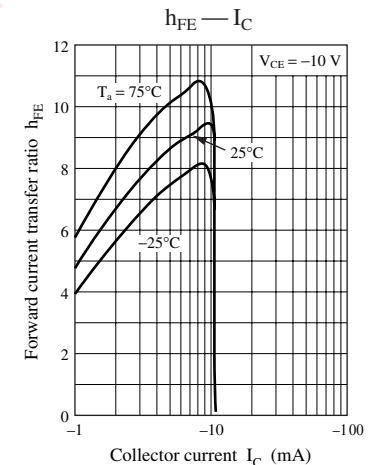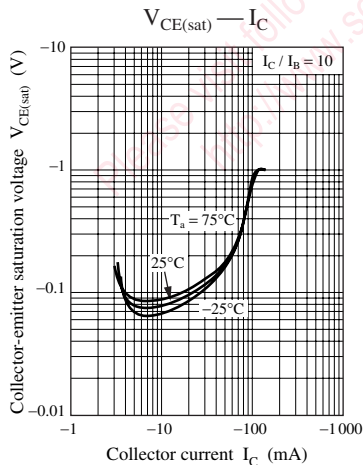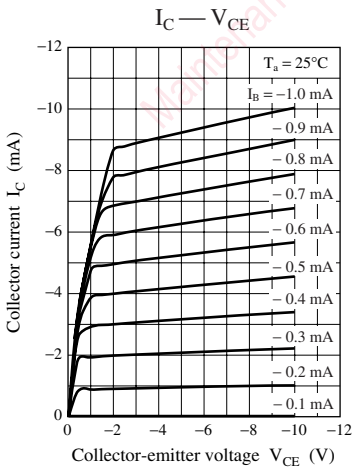

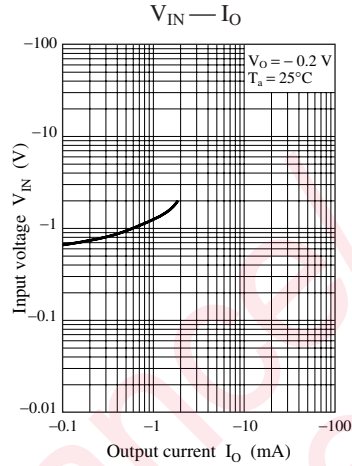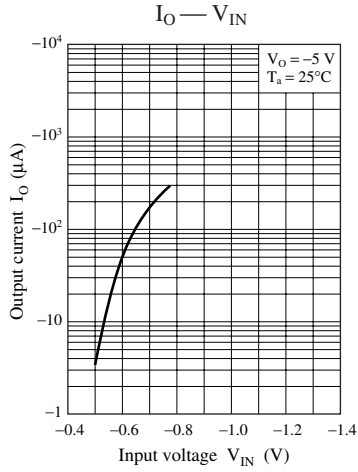

Characteristics charts of UNR211Z

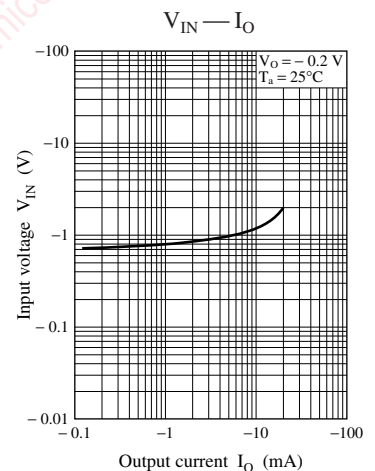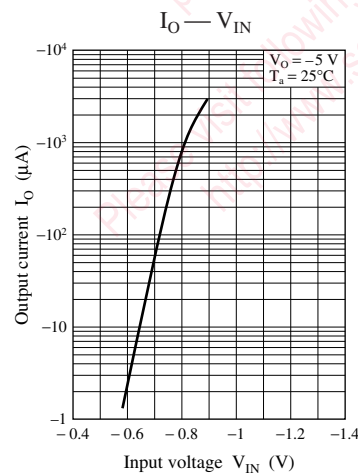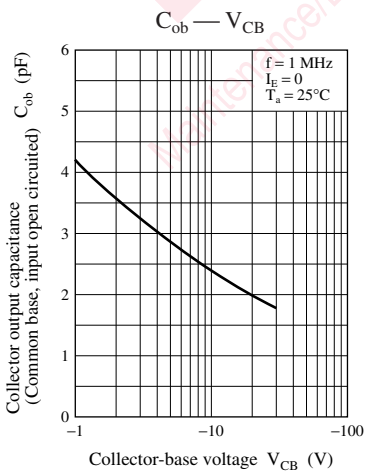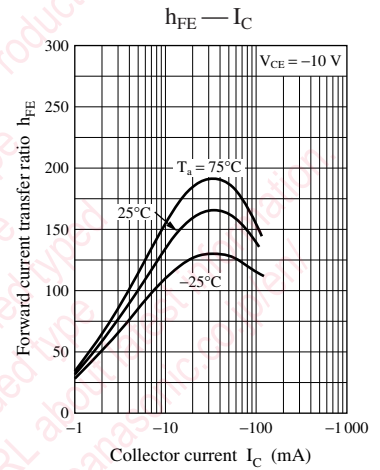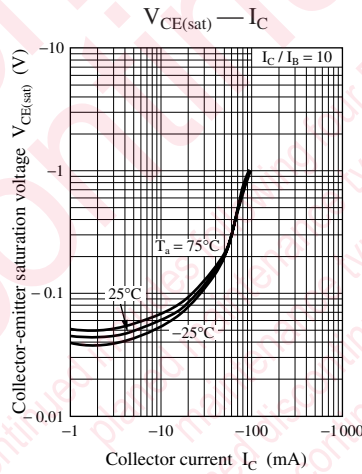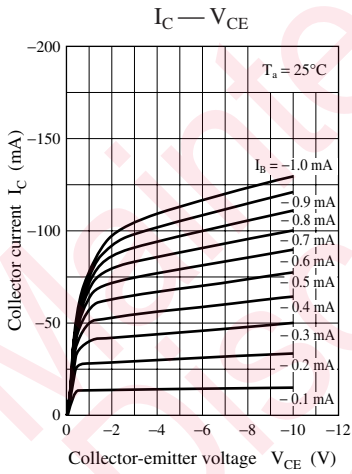

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.