

AP/ETF-6.3 Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	AP/ETF-6.3-DG
Manufacturer	Eaton - Electronics Division
Manufacturer Product Number	AP/ETF-6.3
Description	FUSE BOARD MNT 6.3A 277VAC RAD
Detailed Description	6.3 A 277 V AC DC Fuse Board Mount (Cartridge Style Excluded) Through Hole Radial, Can, Vertical

This model AP/ETF-6.3 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

AP/ETF-6.3

Series:

ETF

Mounting Type:

Through Hole

Current Rating (Amps):

6.3 A

Response Time:

Slow Blow

Breaking Capacity @ Rated Voltage:

100A

Approval Agency:

SEMKO, UL

Color:

-

DC Cold Resistance:

0.008 Ohms

Manufacturer:

Eaton - Electronics Division

Product Status:

Obsolete

Fuse Type:

Board Mount (Cartridge Style Excluded)

Voltage Rating - AC:

277 V

Package / Case:

Radial, Can, Vertical

Melting I²t:

230

Operating Temperature:

-55°C ~ 125°C

Size / Dimension:

0.329" Dia x 0.303" H (8.35mm x 7.70mm)

Environmental & Export classification

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8536.10.0040

ECCN:

EAR99

Description

- Time lag micro fuse
- Base and cap material is a thermoplastic, UL 94-V0
- Leads are tin-lead plated copper alloy

Electrical Characteristics

Rated Current	150%		210%		275%		400%		1000%	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
80mA to 6.3A	1 hr.	2 min.	400 ms.	10 sec.	150 ms.	3 sec.	20 ms.	150 ms.	3 sec.	20 ms.

All are 250V AC



Agency Information

- Semco Certificate No. 9541256 01 VDE License No. 95402: 80mA to 5A / 35A or 10 *In* whichever is greater @ 250VAC
- UL Recognized File No. E19180, CSA Acceptance File No. LR701159; 80mA to 6.3A / 100A @ 277VAC


Environmental Data

- Soldering Heat Resistance: 260°C, 10 sec. per IEC 68-2-20
- Vibration Resistance: MIL-STD-202, Method 201, 10-55Hz x 3 axis/ no load
- Shock Resistance: MIL-STD-202, Method 213, Condition I (Sawtooth)
- Moisture Resistance: MIL-STD-202F, Method 106
- Salt Spray: MIL-STD-202, Method 101, Condition B (48 hrs)
- Operating Temperature: -55°C to +125°C

Ordering

- Specify product code and packaging code

Dimensional Data

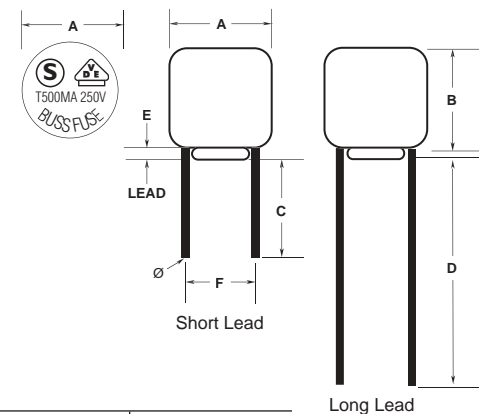

Dimensions
mm (inches)

	Short Lead	Long Lead
A	8.35 ± 0.1 (0.329)	8.35 ± 0.1 (0.329)
B	7.7 ± 0.1 (0.303)	7.7 ± 0.1 (0.303)
C	4.3 ± 0.3 (0.169)	—
D	—	18.8 ± 0.3 (0.740)
E	0.5 min. (0.020)	0.5 min. (0.020)
F	5.08 ± 0.1 (0.200)	5.08 ± 0.1 (0.200)
∅	0.6 ± 0.1 (0.024)	0.6 ± 0.1 (0.024)


SPECIFICATIONS						
Product Code	Ampere Rating	Typical Cold Resistance (ohm)	Volt-drop @ 100% <i>In</i> (Volt) max.	Melting I ² T < 10 mSec (A ² Sec)	Melting I ² T @ 10 <i>In</i> (A ² Sec)	Maximum Power Dissipation (W)
ETF-80mA	80mA	3.3	0.4	0.01	0.01	0.1
ETF-100mA	100mA	2.2	0.35	0.02	0.02	0.11
ETF-125mA	125mA	1.5	0.3	0.04	0.04	0.13
ETF-160mA	160mA	1	0.28	0.07	0.06	0.15
ETF-200mA	200mA	0.7	0.25	0.12	0.11	0.17
ETF-250mA	250mA	0.5	0.22	0.38	0.41	0.19
ETF-315mA	315mA	0.38	0.19	0.6	0.66	0.22
ETF-400mA	400mA	0.28	0.16	0.95	1.05	0.25
ETF-500mA	500mA	0.21	0.15	1.5	1.66	0.29
ETF-630mA	630mA	0.16	0.13	2.4	2.6	0.33
ETF-800mA	800mA	0.12	0.12	3.7	4.2	0.38
ETF-1	1A	0.09	0.11	5.9	6.7	0.44
ETF-1.25	1.25A	0.06	0.1	9	11	0.51
ETF-1.6	1.6A	0.047	0.095	15	17	0.58
ETF-2	2A	0.035	0.09	23	27	0.67
ETF-2.5	2.5A	0.026	0.087	37	43	0.77
ETF-3.15	3.15A	0.019	0.083	58	69	0.88
ETF-4	4A	0.014	0.08	92	110	1.02
ETF-5	5A	0.01	0.077	145	175	1.17
ETF-6.3	6.3A	0.008	0.073	230	281	1.34



Radial Lead Micro Fuse

ETF Series, Time Lag

TIME CURRENT CURVE

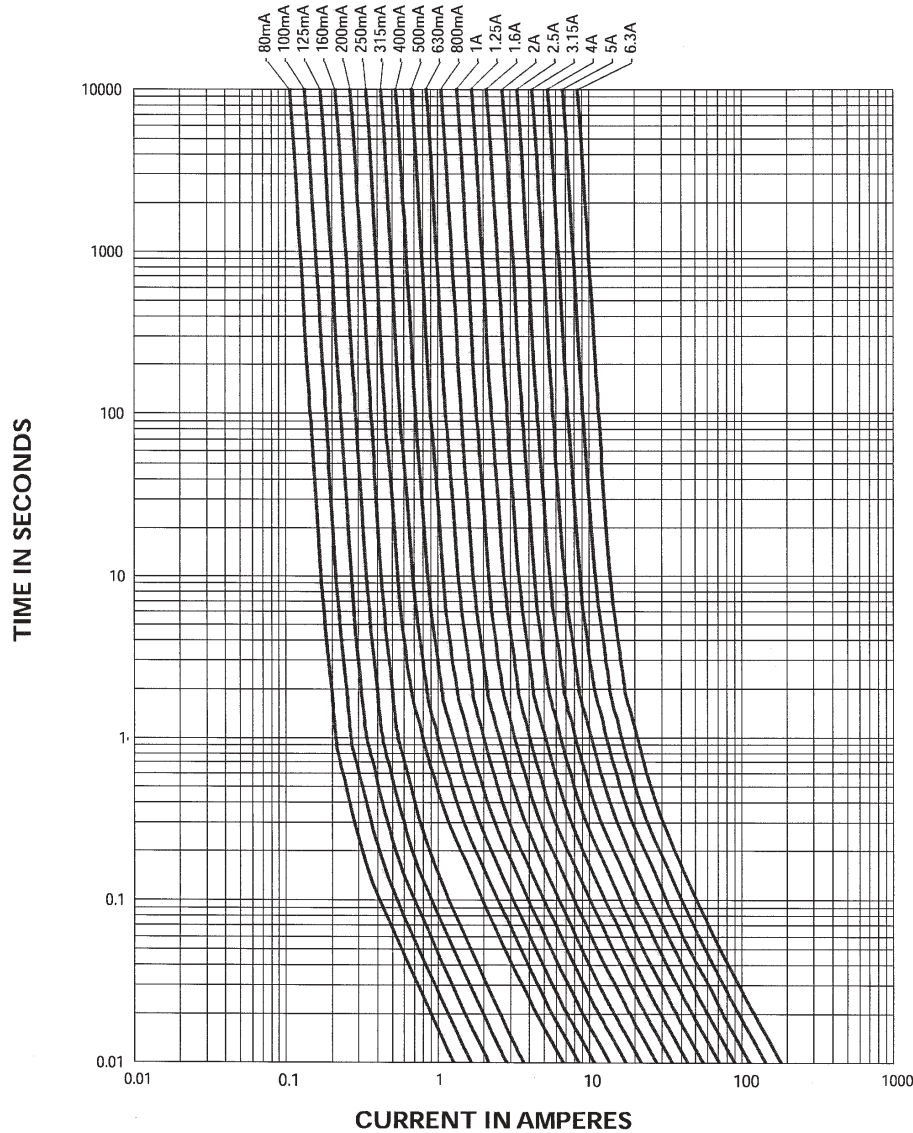

PACKAGING CODE	
Packaging Code	Description
AP	Ammo-pack taped 1,000 per box (long lead only)
BK	In bulk 100 per bag (short lead only)



OC-2590 5/03

Visit us on the Web at www.cooperET.com

© Cooper Electronic Technologies 2003

3601 Quantum Boulevard Boynton Beach, Florida 33426-8638
 Tel: +1-561-752-5000 Toll Free: +1-888-414-2645 Fax: +1-561-742-1178

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.