

# PA4309.274NLT Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	PA4309.274NLT-DG
Manufacturer	<a href="#">Pulse Electronics</a>
Manufacturer Product Number	PA4309.274NLT
Description	FIXED IND 270UH 2.12A 985MOHM SM
Detailed Description	270 $\mu$ H Unshielded Wirewound Inductor 2.12 A 985 mOhm Max Nonstandard



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

PA4309.274NLT

Series:

PA4309.XXXNL

Type:

Wirewound

Inductance:

270  $\mu$ H

Current Rating (Amps):

2.12 A

Shielding:

Unshielded

Q @ Freq:

-

Ratings:

-

Inductance Frequency - Test:

100 kHz

Mounting Type:

Surface Mount

Supplier Device Package:

-

Height - Seated (Max):

0.276" (7.00mm)

Manufacturer:

Pulse Electronics

Product Status:

Active

Material - Core:

-

Tolerance:

$\pm$ 20%

Current - Saturation (Isat):

-

DC Resistance (DCR):

985mOhm Max

Frequency - Self Resonant:

-

Operating Temperature:

-40°C ~ 125°C

Features:

-

Package / Case:

Nonstandard

Size / Dimension:

0.504" L x 0.504" W (12.80mm x 12.80mm)

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.4000

Moisture Sensitivity Level (MSL):

1 (Unlimited)





ECCN:

EAR99

# Unshielded Drum Core Inductor

PA4309.XXXNL & PA4310.XXXNL Series




-  **Height:** 7.0mm (PA4309) and 8.0mm (PA4310) Max
-  **Footprint:** 12.8 x 12.8 mm Max
-  **Current Rating:** 1A to 20A
-  **Inductance Range:** 1uH to 1000uH

## Electrical Specifications @ 25°C – Operating Temperature -40°C to 125°C

Pulse Part Number	Inductance (uH) <sup>1,2</sup>	Rated Current (A) Max <sup>3</sup>	DC Resistance (mΩ) Max	Package Size (mm)
PA4309.102NLT	1.0	20	19	12.8 x 12.8 x 7.0mm Max
PA4309.152NLT	1.5	20	22	
PA4309.222NLT	2.2	20	27	
PA4309.332NLT	3.3	19	30	
PA4309.472NLT	4.7	15	38	
PA4309.562NLT	5.6	14.5	40	
PA4309.682NLT	6.8	13.5	42	
PA4309.822NLT	8.2	11.5	48	
PA4309.103NLT	10	11	52	
PA4309.153NLT	15	9.3	68	
PA4309.223NLT	22	7.5	98	
PA4309.333NLT	33	6.2	135	
PA4309.473NLT	47	5.2	182	
PA4309.563NLT	56	4.6	236	
PA4309.683NLT	68	4.2	298	
PA4309.823NLT	82	3.9	326	
PA4309.104NLT	100	3.5	405	
PA4309.124NLT	120	3.2	452	
PA4309.154NLT	150	2.8	605	
PA4309.184NLT	180	2.6	735	
PA4309.224NLT	220	2.3	885	
PA4309.274NLT	270	2.12	985	
PA4309.334NLT	330	1.9	1215	
PA4309.394NLT	390	1.75	1485	
PA4309.474NLT	470	1.6	1755	
PA4309.564NLT	560	1.45	2241	
PA4309.684NLT	680	1.32	2565	
PA4309.824NLT	820	1.2	3510	
PA4309.105NLT	1000	1.08	3915	

# Unshielded Drum Core Inductor

PA4309.XXXNL & PA4310.XXXNL Series

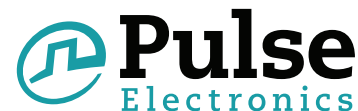

## Electrical Specifications @ 25°C — Operating Temperature -40°C to 125°C

Pulse Part Number	Inductance (uH)	Rated Current (A) Max	DC Resistance (mΩ) Max	Package Size (mm)
PA4310.102NLT	1	20	16	12.8 x 12.8 x 8.0mm Max
PA4310.152NLT	1.5	20	18	
PA4310.222NLT	2.2	20	20	
PA4310.332NLT	3.3	20	26	
PA4310.472NLT	4.7	17	28	
PA4310.562NLT	5.6	16	30	
PA4310.682NLT	6.8	14	32	
PA4310.822NLT	8.2	13	36	
PA4310.103NLT	10	12	37	
PA4310.153NLT	15	9	63	
PA4310.223NLT	22	7	82	
PA4310.333NLT	33	6.5	109	
PA4310.473NLT	47	5	160	
PA4310.563NLT	56	4.8	191	
PA4310.683NLT	68	4.3	225	
PA4310.823NLT	82	4	285	
PA4310.104NLT	100	3.5	310	
PA4310.124NLT	120	3.2	380	
PA4310.154NLT	150	3	430	
PA4310.184NLT	180	2.7	570	
PA4310.224NLT	220	2.5	660	
PA4310.274NLT	270	2.1	830	
PA4310.334NLT	330	1.8	941	
PA4310.394NLT	390	1.7	1170	
PA4310.474NLT	470	1.6	1430	
PA4310.564NLT	560	1.5	1680	
PA4310.684NLT	680	1.4	1999	
PA4310.824NLT	820	1.2	2630	
PA4310.105NLT	1000	1.1	3600	

### NOTES:

- Inductance tolerance is +/-30% for inductance values between 1uH and 8.2uH and +/-20% for values between 10uH and 680uH.
- Inductance is measured at 100kHz, 250mV
- The rated current as listed is the rms or heating current that the part can withstand with acceptable temperature rise in typical applications. At the listed current the inductance typically drops to 85%-90% of the no load value when measured at 25°C. The inductance is guaranteed to be greater than 65% of the no load inductance value when measured at 25°C.
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature.
- Parts come in tape and reel packaging. Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=24mm) and pitch (P=16mm).


# Unshielded Drum Core Inductor

PA4309.XXXNL & PA4310.XXXNL Series



## Mechanical

### PA43XX.XXXNLT

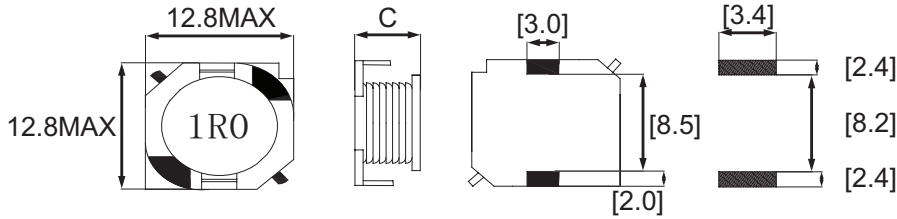

PA4309.XXXNL – C dimension is 7.0mm Max  
 PA4310.XXXNL – C dimension is 8.0mm Max

**Weight** .....PA4309 (2.03 grams), PA4310 (2.39 grams)  
**Tape & Reel** .....1500/reel

## For More Information

### Pulse Worldwide Headquarters

12220 World Trade Drive  
 San Diego, CA 92128  
 U.S.A.

Tel: 858 674 8100  
 Fax: 858 674 8262

### Pulse Europe

Zeppelinstrasse 15  
 71083 Herrenberg  
 Germany

Tel: 49 7032 7806 0  
 Fax: 49 7032 7806 12

### Pulse China Headquarters

B402, Shenzhen Academy of  
 Aerospace Technology Bldg.  
 10th Kejinan Road  
 High-Tech Zone  
 Nanshan District  
 Shenzhen, PR China 518057

Tel: 86 755 33966678  
 Fax: 86 755 33966700

### Pulse North China

Room 2704/2705  
 Super Ocean Finance Ctr.  
 2067 Yan An Road West  
 Shanghai 200336  
 China

Tel: 86 21 62787060  
 Fax: 86 2162786973

### Pulse South Asia

135 Joo Seng Road  
 #03-02  
 PM Industrial Bldg.  
 Singapore 368363

Tel: 65 6287 8998  
 Fax: 65 6287 8998

### Pulse North Asia

3F, No. 198  
 Zhongyuan Road  
 Zhongli City  
 Taoyuan County 320  
 Taiwan R. O. C.

Tel: 886 3 4356768  
 Fax: 886 3 4356823 (Pulse)  
 Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2015. Pulse Electronics, Inc. All rights reserved.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.