

PA4546.221NLT Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	PA4546.221NLT-DG
Manufacturer	Pulse Electronics
Manufacturer Product Number	PA4546.221NLT
Description	FIXED IND 220NH 8.5A 8 MOHM SMD
Detailed Description	220 nH Unshielded Molded Inductor 8.5 A 8mOhm Max Nonstandard



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

PA4546.221NLT

Series:

PA4546.XXXNLT

Type:

Molded

Inductance:

220 nH

Current Rating (Amps):

8.5 A

Shielding:

Unshielded

Q @ Freq:

-

Ratings:

-

Inductance Frequency - Test:

100 kHz

Mounting Type:

Surface Mount

Supplier Device Package:

-

Height - Seated (Max):

0.047" (1.20mm)

Manufacturer:

Pulse Electronics

Product Status:

Active

Material - Core:

-

Tolerance:

±20%

Current - Saturation (Isat):

20A

DC Resistance (DCR):

8mOhm Max

Frequency - Self Resonant:

-

Operating Temperature:

-40°C ~ 125°C

Features:

-

Package / Case:

Nonstandard

Size / Dimension:

0.175" L x 0.160" W (4.45mm x 4.06mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.8000

Moisture Sensitivity Level (MSL):


1 (Unlimited)

ECCN:

EAR99

SMT Power Inductors

High Current Molded Power Inductor - PA4546.XXXNLT & PM4546.XXXNLT Series

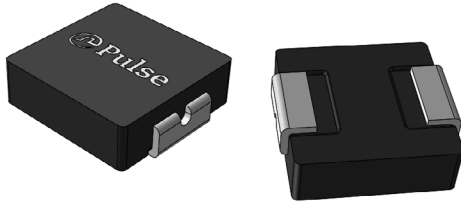

- Ⓢ **Height:** 1.2mm Max
- Ⓢ **Footprint:** 4.7mm x 4.31mm Max
- Ⓢ **Current Rating:** up to 11.5A
- Ⓢ **Inductance Range:** 0.10uH to 22uH
- Ⓢ High current, low DCR, and high efficiency
- Ⓢ High reliability
- Ⓢ Minimized acoustic noise and minimized leakage flux noise

Electrical Specifications @ 25°C - Operating Temperature -55°C to +125°C

Commercial ^{6,7}	Automotive ^{6,7}	Inductance ⁵ 100KHz, 1.0V uH±20%	Rated ³ Current A	DC Resistance		Saturation ² Current A	K Factor for CoreLoss
				TYP.	MAX.		
				mΩ	mΩ		
PA4546.101NLT	PM4546.101NLT	0.10*	11.5	4.3	5.5	25	707.4
PA4546.121NLT	PM4546.121NLT	0.12*	10.5	4.8	6.2	23	866.2
PA4546.151NLT	PM4546.151NLT	0.15*	10.0	5.5	6.8	21.5	1004.5
PA4546.221NLT	PM4546.221NLT	0.22	8.5	6.6	8.0	20	717.5
PA4546.251NLT	PM4546.251NLT	0.25	8.2	8	10	16	618.7
PA4546.331NLT	PM4546.331NLT	0.33	7.0	13.6	16	11	655.0
PA4546.361NLT	PM4546.361NLT	0.36	6.5	15.5	18	8.5	448.6
PA4546.471NLT	PM4546.471NLT	0.47	6.0	18.0	20	6.5	535.9
PA4546.601NLT	PM4546.601NLT	0.60	5.3	22.5	26	6.0	493.7
PA4546.681NLT	PM4546.681NLT	0.68	5.0	32	37	6.0	235.8
PA4546.821NLT	PM4546.821NLT	0.82	4.5	38	44	6.0	192.9
PA4546.102NLT	PM4546.102NLT	1.00	4.0	41	47	6.0	269.2
PA4546.122NLT	PM4546.122NLT	1.20	3.5	48	56	5.0	195.8
PA4546.152NLT	PM4546.152NLT	1.50	3.0	55	63.3	4.0	198.6
PA4546.222NLT	PM4546.222NLT	2.20	2.8	69.2	80	3.5	164.0
PA4546.332NLT	PM4546.332NLT	3.30	2.3	84	97	3.0	187.3
PA4546.472NLT	PM4546.472NLT	4.70	2.0	128	145	2.5	122.3
PA4546.562NLT	PM4546.562NLT	5.60	1.7	180	208	2.3	89.0
PA4546.682NLT	PM4546.682NLT	6.80	1.5	300	360	1.7	87.7
PA4546.822NLT	PM4546.822NLT	8.20	1.4	313	376	1.6	60.6
PA4546.103NLT	PM4546.103NLT	10	1.3	410	463	1.4	69.3
PA4546.153NLT	PM4546.153NLT	15	1.05	550	610	1.2	60.3
PA4546.183NLT	PM4546.183NLT	18	0.9	860	960	1.1	58.5
PA4546.223NLT	PM4546.223NLT	22	0.8	950	1050	1.0	52.4

SMT Power Inductors

High Current Molded Power Inductor - PA4546.XXXNLT & PM4546.XXXNLT Series




Notes:

- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- The saturation current is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- The rated current is the DC current required to raise the component temperature by approximately 40°C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- The part temperature (ambient+temp rise) should not exceed 125°C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- Please note that the inductance tolerance of all parts are +/-20% except those indicated with a * which are +/-30%.
- Parts shown in bold are standard catalog parts and are available through sample stock and distribution. Parts in lighter font are available but are not necessarily held in sample stock or distribution **and lead times may be longer**. Please contact Pulse for availability.
- The PA4546.XXXNLT and PM4546.XXXNLT are both AEC-Q200 qualified. The PM4546.XXXNLT part numbers are also IATF16949 certified. The mechanical dimensions are 100% tested in production but do not necessarily meet a product capability index (Cpk) 1.33 and therefore the PM4546.XXXNLT may not strictly conform to PPAP
- See Characteristics

Mechanical


PA4546/PM4546

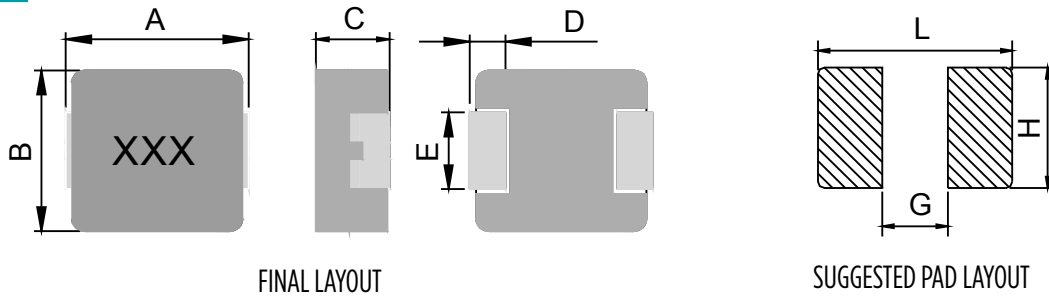

Series	A	B	C	D	E	L	G	H
PA4546/PM4546	4.45±0.25	4.06±0.25	1.0±0.2	0.76±0.30	2.0±0.20	5.2	2.2	2.3

All Dimensions in mm.

TAPE & REEL INFO

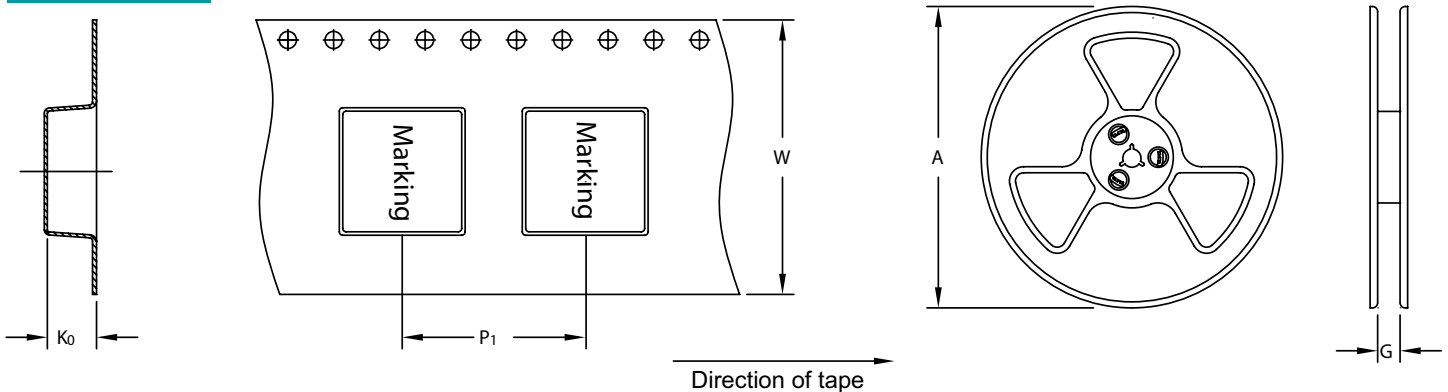

SURFACE MOUNTING TYPE, REEL/TAPE LIST						
	REEL SIZE (mm)		TAPE SIZE (mm)			QTY
	A	G	P ₁	W	K ₀	PCS/REEL
PA4546/PM4546	Ø330	12.4	8	12	1.5	4000
















SMT Power Inductors

High Current Molded Power Inductor - PA4546.XXXNLT & PM4546.XXXNLT Series










Typical Performance Curves

PA4546.XXXNLT



SMT Power Inductors


High Current Molded Power Inductor - PA4546.XXXNLT & PM4546.XXXNLT Series

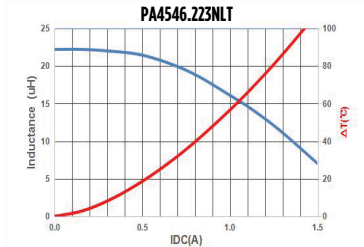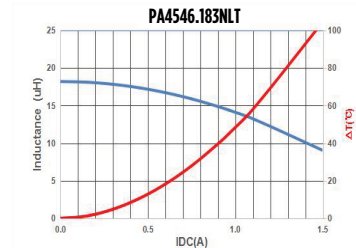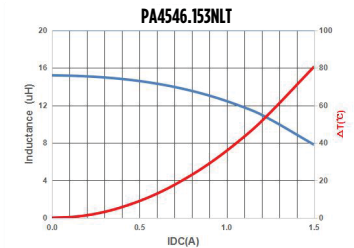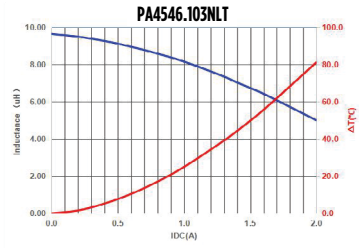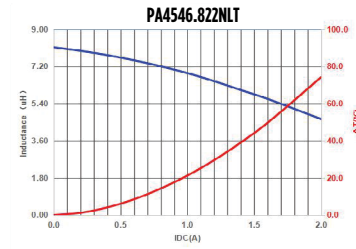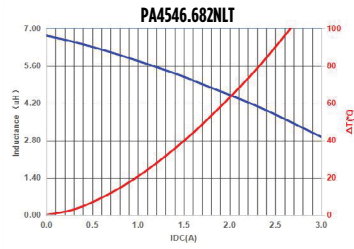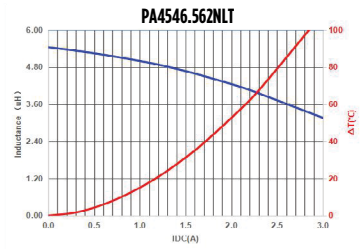

SMT Power Inductors

High Current Molded Power Inductor - PA4546.XXXNLT & PM4546.XXXNLT Series

CoreLoss versus Flux Density

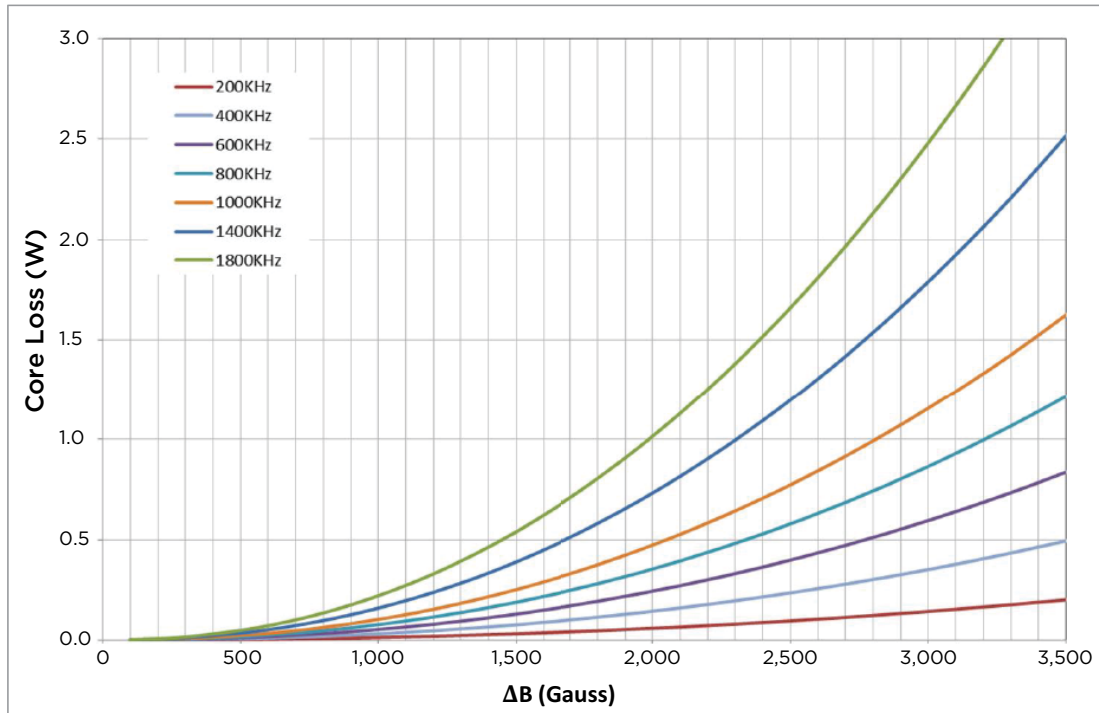

$$\Delta B = K * L(\mu H) * \Delta I(A)$$

For More Information:

Americas - prodinfo_power@pulseelectronics.com | Europe - power-apps-europe@pulseelectronics.com | Asia - power-apps-asia@pulseelectronics.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2021. Pulse Electronics, Inc. All rights reserved.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.