

PG0255.222NLT Datasheet

www.digi-electronics.com



DiGi Electronics Part Number	PG0255.222NLT-DG
Manufacturer	Pulse Electronics
Manufacturer Product Number	PG0255.222NLT
Description	FIXED IND 2.2UH 13A 7 MOHM SMD
Detailed Description	2.2 μ H Shielded Wirewound Inductor 13 A 7mOhm Max Nonstandard

<https://www.DiGi-Electronics.com>



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

PG0255.222NLT

Series:

PG0255NL

Type:

Wirewound

Inductance:

2.2 μ H

Current Rating (Amps):

13 A

Shielding:

Shielded

Q @ Freq:

-

Ratings:

-

Inductance Frequency - Test:

100 kHz

Mounting Type:

Surface Mount

Supplier Device Package:

-

Height - Seated (Max):

0.157" (4.00mm)

Manufacturer:

Pulse Electronics

Product Status:

Active

Material - Core:

-

Tolerance:

\pm 15%

Current - Saturation (Isat):

20A

DC Resistance (DCR):

7mOhm Max

Frequency - Self Resonant:

-

Operating Temperature:

-40°C ~ 125°C

Features:

-

Package / Case:

Nonstandard

Size / Dimension:

0.425" L x 0.406" W (10.80mm x 10.30mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.4000

Moisture Sensitivity Level (MSL):

1 (Unlimited)





ECCN:

EAR99

SMT Power Inductors

Flat Coils - PG0255NL Series



-  **Height:** 4.0mm Max
-  **Footprint:** 11.5mm x 10.3mm Max
-  **Heating Current Rating:** up to 51A
-  **Inductance Range:** 0.17 μ H to 2.1 μ H

Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

Part Number	Inductance ² @ Irated (TYP)	Irated ⁵ (A)	Controlled Electrical Specifications				Saturation ⁵ Current Isat (A)	Heating ⁶ Current Ihc (A)	Core Loss Factor ⁷	
			DCR (m Ω)		Inductance @ 0Adc (μ H \pm 15%)	Inductance ⁴ @ Bias (μ H \pm 20%)			K1	K2
			TYP	MAX						
PG0255.201NL	0.17	30	0.45	0.55	0.20	0.18 @ 21Adc	30	51	6.20e-10	47
PG0255.401NL	0.34	29	1.05	1.15	0.40	0.36 @ 17Adc	29	34	6.20e-10	56
PG0255.601NL	0.51	27	1.70	1.87	0.60	0.56 @ 15Adc	28	27	6.20e-10	60
PG0255.102NL	0.90	21	2.80	3.20	1.00	0.87 @ 26Adc	27	21	6.20e-10	78
PG0255.152NL	1.35	16	4.50	5.00	1.50	1.20 @ 17Adc	22	16	6.20e-10	95
PG0255.182NL	1.57	16	4.50	5.00	1.80	1.57 @ 16Adc	21	16	6.20e-10	115
PG0255.222NL	2.10	13	6.60	7.00	2.20	1.80 @ 20Adc	20	13	6.20e-10	118

Notes:

- The temperature of the component (ambient plus temperature rise) must be within the specified operating temperature range.
- Inductance at Irated is a typical inductance value for the component taken at rated current.
- The rated current listed is the lower of the saturation current @ 25°C or the heating current.
- The inductance at Bias is the controlled inductance value measured after subjecting the part to the listed dc bias current.
- The saturation current, ISAT, is the current at which the component inductance drops by 20% (typical) at an ambient temperature of 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- The heating current, IDC, is the DC current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test. Take note that the component's performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- Core loss approximation is based on published core data:

$$\text{Core Loss} = K1 * (f)^{1.48} * (K2\Delta I)^{1.97}$$
Where: Core Loss = in Watts
f = switching frequency in kHz
K1 & K2 = core loss factors
 ΔI = delta I across the component in Ampere
K2 ΔI = one half of the peak to peak flux density across the component in Gauss
- Unless otherwise specified, all testing is made at 100kHz, 0.1V_{AC}.
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PG0255.601NL becomes PG0255.601NLT). Pulse complies to industry standard tape and reel specification EIA481.

SMT Power Inductors






Flat Coils - PG0255NL Series



Mechanical


Schematic

PG0255.XXXNL




Weight1.8grams
 Tape & Reel850/reel
 Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Unless otherwise specified,
 all tolerances are: $\pm \frac{.010}{0.25}$

PART NUMBER	"X" Dimension (mm MAX)
PG0255.201NL	.453/11.50
PG0255.401NL	.453/11.50
PG0255.601NL	.453/11.50
PG0255.222NL	.425/10.80
PG0255.152NL	.425/10.80
PG0255.102NL	.425/10.80
PG0255.182NL	.425/10.80

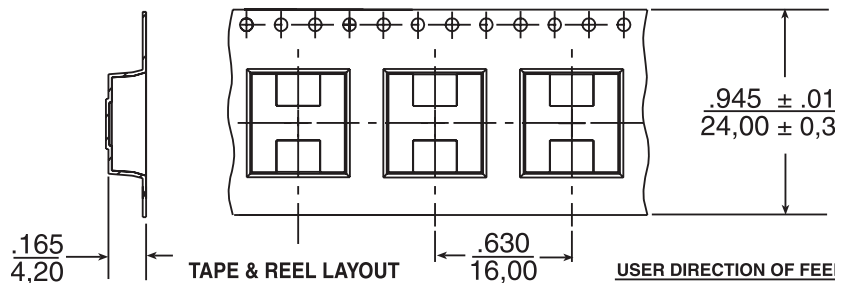

Typical Inductance vs DC Bias

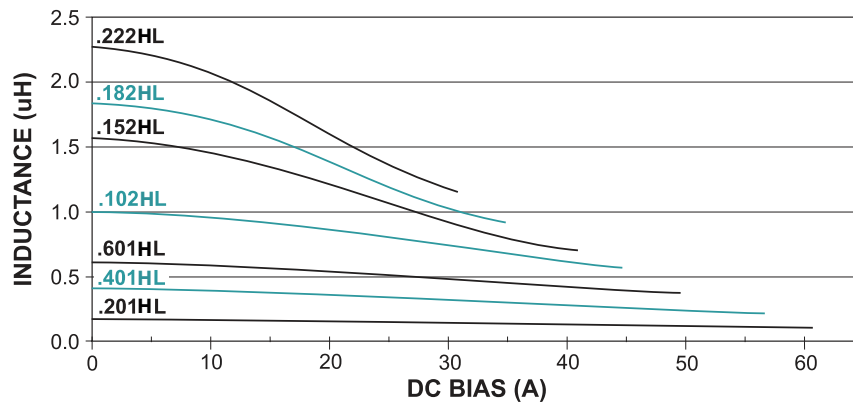

For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
 San Diego, CA 92128
 U.S.A.

Pulse Europe

Pulse Electronics GmbH
 Am Rottland 12
 58540 Meinerzhagen
 Germany

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
 D708, Shenzhen Academy of
 Aerospace Technology,
 The 10th Keji South Road,
 Nanshan District, Shenzhen,
 P.R. China 518057

Pulse North China

Room 2704/2705
 Super Ocean Finance Ctr.
 2067 Yan An Road West
 Shanghai 200336
 China

Pulse South Asia

3 Fraser Street 0428
 DUO Tower
 Singapore 189352

Pulse North Asia

1F., No.111 Xiyuan Road
 Zhongli District
 Taoyuan City 32057
 Taiwan (R.O.C)

Tel: 858 674 8100
 Fax: 858 674 8262

Tel: 49 2354 777 100
 Fax: 49 2354 777 168

Tel: 86 755 33966678
 Fax: 86 755 33966700

Tel: 86 21 62787060
 Fax: 86 2162786973

Tel: 65 6287 8998
 Fax: 65 6280 0080

Tel: 886 3 4356768
 Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.