

PG0926.722NLT Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

| | |
|------------------------------|--|
| DiGi Electronics Part Number | PG0926.722NLT-DG |
| Manufacturer | Pulse Electronics |
| Manufacturer Product Number | PG0926.722NLT |
| Description | FIXED IND 7.2UH 12A 7 MOHM SMD |
| Detailed Description | 7.2 μ H Unshielded Wirewound Inductor 12 A 7mOhm Nonstandard |



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

PG0926.722NLT

Series:

PG0926NL

Type:

Wirewound

Inductance:

7.2 μ H

Current Rating (Amps):

12 A

Shielding:

Unshielded

Q @ Freq:

-

Ratings:

-

Inductance Frequency - Test:

100 kHz

Mounting Type:

Surface Mount

Supplier Device Package:

-

Height - Seated (Max):

0.315" (8.00mm)

Manufacturer:

Pulse Electronics

Product Status:

Active

Material - Core:

-

Tolerance:

\pm 20%

Current - Saturation (Isat):

12.5A

DC Resistance (DCR):

7mOhm

Frequency - Self Resonant:

-

Operating Temperature:

-40°C ~ 130°C

Features:

-

Package / Case:

Nonstandard

Size / Dimension:

0.528" L x 0.528" W (13.40mm x 13.40mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.8000

Moisture Sensitivity Level (MSL):


1 (Unlimited)






ECCN:

EAR99

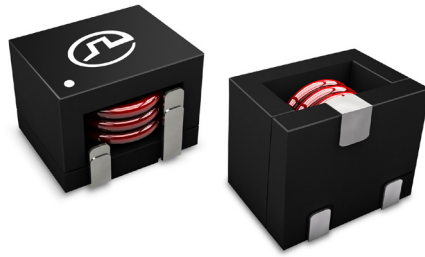SMT Power Inductor

Round Wire Coils - PG0926NL series



-  **Inductance Range:** 0.46 μ H to 22.0 μ H
-  **Current Rating:** up to 50A_{pk}
-  **Footprint:** 13.4mm x 13.4mm Max
-  **Height:** 8.0mm Max
-  **No Thermal Aging**

Electrical Specifications @ 25°C - Operating Temperature -40°C to 130°C¹

| Part Number | Inductance @ Irated ² μ H TYPICAL | Irated ³ (A) | CONTROLLED ELECTRICAL SPECS | | SATURATION ⁵ CURRENT Isat (A TYP) | | HEATING ⁶ CURRENT Idc (A TYP) | CORE LOSS ⁷ FACTOR (K2) |
|--------------|--|----------------------------|--|---|--|-------|--|--|
| | | | DCR ⁴ (m Ω) \pm 12% | INDUCTANCE @0Adc (μ \pm 20%) | 25°C | 100°C | | |
| PG0926.461NL | 0.42 | 44 | 0.55 | 0.46 | 50 | 40 | 44 | 32.9 |
| PG0926.102NL | 0.94 | 30 | 1.2 | 1.00 | 34 | 27 | 30 | 47.6 |
| PG0926.182NL | 1.7 | 22 | 2.2 | 1.80 | 25 | 21 | 22 | 64.3 |
| PG0926.282NL | 2.6 | 19 | 2.9 | 2.80 | 20 | 16 | 19 | 80.0 |
| PG0926.562NL | 5.0 | 14 | 4.1 | 5.60 | 14 | 11.5 | 14.5 | 114.3 |
| PG0926.722NL | 6.8 | 12 | 7.0 | 7.20 | 12.5 | 10 | 12 | 128.6 |
| PG0926.872NL | 8.4 | 11 | 8.0 | 8.70 | 11.5 | 9 | 11 | 138.1 |
| PG0926.113NL | 10.6 | 9.5 | 12.0 | 11.50 | 10.5 | 8 | 9.5 | 157.1 |
| PG0926.153NL | 13.5 | 8 | 12.5 | 15.00 | 9 | 7 | 8 | 194.8 |
| PG0926.223NL | 20 | 7 | 21.0 | 22.00 | 7.5 | 6 | 7 | 224.5 |

Notes:

- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- Inductance at Irated is a typical inductance value for the component taken at rated current.
- The rated current listed is either the saturation current (@ 25°C) or the heating current depending on which value is lower.
- The DCR of the part is measured at an ambient temperature of 20°C \pm 3°C from point a to b as shown below on the mechanical drawing.
- The saturation current, Isat, is the current at which the component inductance drop by 20% (typical) at an ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- The heating current, Idc, is the DC current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- Core loss approximation is based on published core data:
Core Loss = K1 * (f)^{1.72} * (K2 Δ I)^{2.41} in mW
K1 = 8.68E - 10
f = switching frequency in KHz
K1 & K2 = core loss factors
 Δ I = delta I across the component in Ampere
K2 Δ I = one half of the peak to peak flux density across the component in Gauss
- Unless otherwise specified, all testing is made at 100KHz, 0.1Vac
- Optional Tape and Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PG0926.223NL becomes PG0926.223NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=32.0mm), pitch (Po=20.0mm) and depth (Ko=8.35mm).
- The core is a conductive material so care should be taken when mounting this component over an exposed via or if the voltage across the terminals exceeds 24V. Trickle current through the core material may generate additional losses and potential overheating. Please contact Pulse to discuss an alternative solution if required.

SMT Power Inductor




Round Wire Coils - PG0926NL series




Mechanicals

Schematics

PG0926.XXXNL

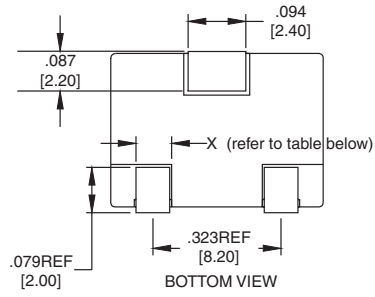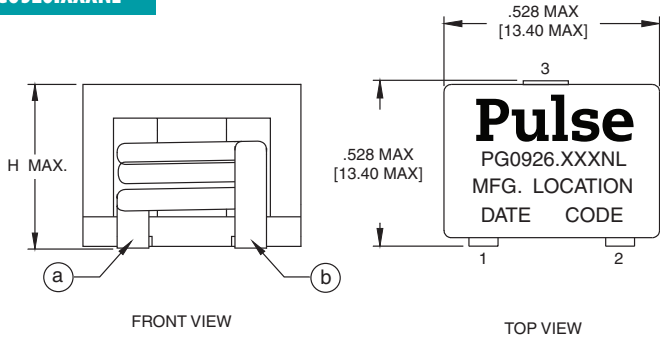

*Pin 3 is for mechanical support only and has no internal electrical connection

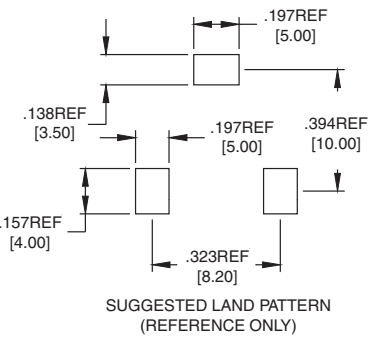


Weight.....4.5 grams
Tape and Reel.....300/reel

Dimensions: $\frac{\text{inched}}{\text{mm}}$
Unless otherwise specified, all tolerance are $\begin{matrix} +.010 \\ -0.25 \end{matrix}$



| PART NUMBER | X(Ref.) | H (HEIGHT) |
|--------------|---------|------------|
| PG0926.461NL | 2.0mm | 8.0mm |
| PG0926.102NL | 2.0mm | |
| PG0926.182NL | 2.0mm | |
| PG0926.282NL | 2.0mm | |
| PG0926.562NL | 2.0mm | |
| PG0926.722NL | 1.6mm | |
| PG0926.872NL | 1.6mm | 7.9mm |
| PG0926.113NL | 1.3mm | |
| PG0926.153NL | 1.3mm | |
| PG0926.223NL | 1.0mm | |

Typical Inductance vs DC Bias

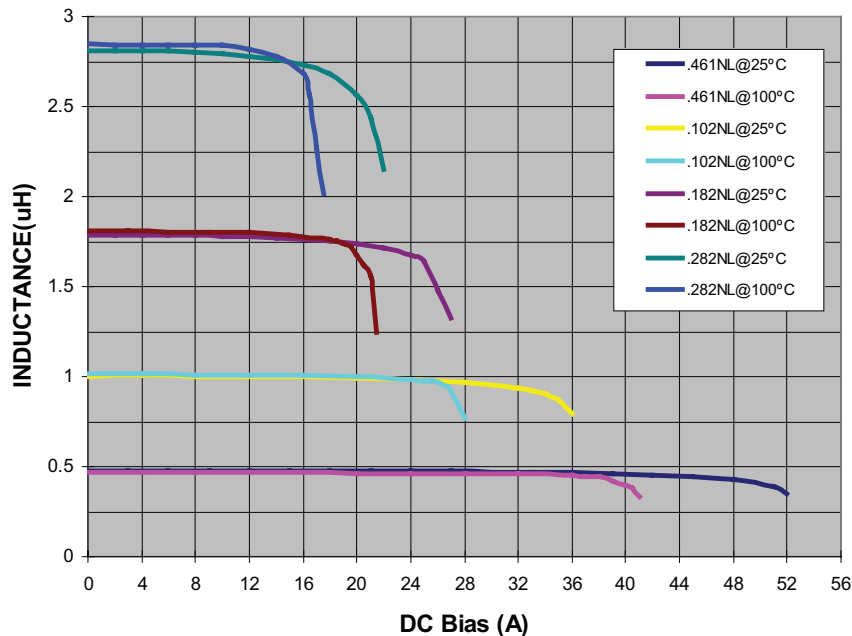

SMT Power Inductor

Round Wire Coils - PG0926NL series

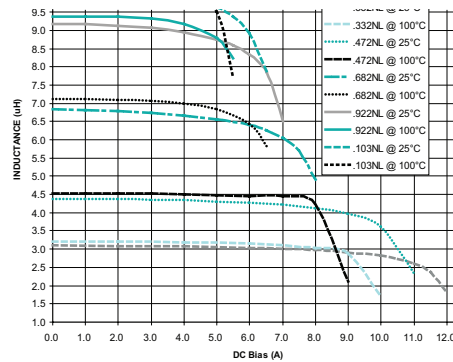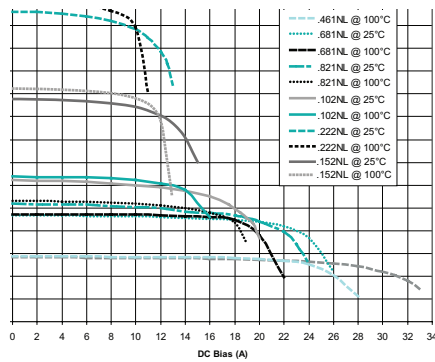

For More Information

Americas - prodinfo_power_americas@yageo.com | Europe - prodinfo_power_emea@yageo.com | Asia - prodinfo_power_asia@yageo.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2023. Pulse Electronics, Inc. All rights reserved.

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.