

PM2206.471NLT Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	PM2206.471NLT-DG
Manufacturer	Pulse Electronics
Manufacturer Product Number	PM2206.471NLT
Description	FIXED IND 470NH 17A 6.2MOHM SMD
Detailed Description	470 nH Unshielded Inductor 17 A 6.2mOhm Max No nstandard



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

PM2206.471NLT

Series:

PM2206.XXXNLT

Type:

-

Inductance:

470 nH

Current Rating (Amps):

17 A

Shielding:

Unshielded

Q @ Freq:

-

Ratings:

AEC-Q200

Inductance Frequency - Test:

100 kHz

Mounting Type:

Surface Mount

Supplier Device Package:

SMD

Height - Seated (Max):

0.081" (2.05mm)

Manufacturer:

Pulse Electronics

Product Status:

Active

Material - Core:

-

Tolerance:

±20%

Current - Saturation (Isat):

28A

DC Resistance (DCR):

6.2mOhm Max

Frequency - Self Resonant:

-

Operating Temperature:

-55°C ~ 155°C

Features:

-

Package / Case:

Nonstandard

Size / Dimension:

0.307" L x 0.299" W (7.80mm x 7.60mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.4000

Moisture Sensitivity Level (MSL):


1 (Unlimited)

ECCN:

EAR99

SMT Power Inductors

High Current Composite Inductor - PA5006.XXXNLT and PM2206.XXXNLT

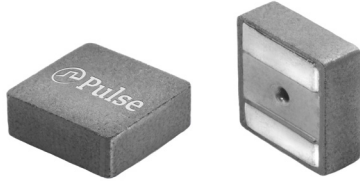

- Ⓟ **Height:** 2.05mm Max
- Ⓟ **Footprint:** 8.05mm x 7.8mm Max
- Ⓟ **Current Rating:** up to 35Apk
- Ⓟ **Inductance Range:** 0.27uH to 1.0uH
- Ⓟ High current, low DCR, and high efficiency
- Ⓟ Rated Voltage between Terminals: 60V
- Ⓟ Minimized acoustic noise and minimized leakage flux noise
- Ⓟ Available in Commercial (PA5006) and Automotive (PM2206) grades

Electrical Specifications @ 25°C, Operating Temperature Range -55°C to +155°C

Part Number		Inductance 100KHz, 0.1V uH±20%	Rated ⁵ Current A	DC Resistance		Saturation ² Current (25°C) A	Mechanical D mm±0.3	K Factor for Core Loss
Commerical	Automotive ⁶			TYP. mΩ	MAX. mΩ			
PA5006.271NLT	PM2206.271NLT	0.27	21	2.9	3.5	32	6.6	141.7
PA5006.311NLT	PM2206.311NLT	0.31	20	4.0	4.8	31	6.2	141.7
PA5006.331NLT	PM2206.331NLT	0.33	19	4.0	4.8	31	6.2	141.7
PA5006.471NLT	PM2206.471NLT	0.47	17	5.1	6.2	25	6.2	103.9
PA5006.681NLT	PM2206.681NLT	0.68	13	7.9	9.2	23	6.2	82.1
PA5006.102NLT	PM2206.102NLT	1.00	11	9.8	10.8	20	6.2	67.8

Notes:

- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- The saturation current is the current at which the initial inductance is guaranteed to drop by no more than 40%. The typical inductance at a specified current can be found on the typical performance curves.
- The rated current is the DC current required to raise the component temperature by approximately 40 °C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- The part temperature (ambient+temp rise) should not exceed 155 °C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- The PM2206.XXXNLT part numbers are AEC-Q200 and IATF16949 certified. The mechanical dimensions are 100% tested in production but do not necessarily meet a product capability index (Cpk) >1.33 and therefore may not strictly conform to PPAP.
- Special Characteristics Ⓟ


SMT Power Inductors

High Current Composite Inductor - PA5006.XXXNLT and PM2206.XXXNLT




Mechanical

PA5006.XXXNLT and PM2206.XXXNLT

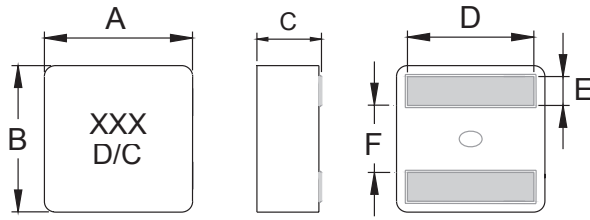

FINAL LAYOUT




SUGGESTED PAD LAYOUT

Series	A	B	C	D	E	F	L	G	H
PA5006/PM2206	7.8±0.25	7.6±0.2	1.85±0.2	See Spec Table	1.75±0.2	3.15±0.25	7.4 (REF)	2.8(REF)	7.2 (REF)



All Dimensions in mm.

TAPE & REEL INFO

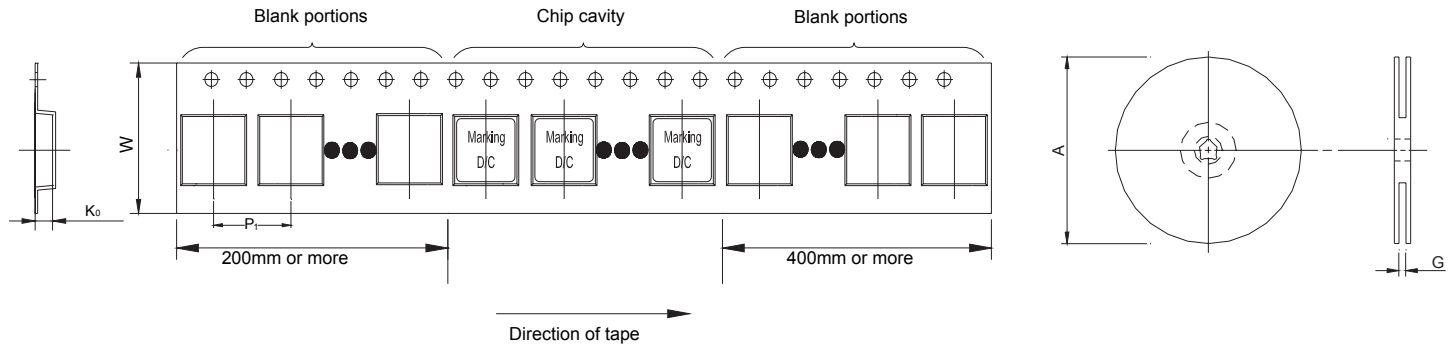





SURFACE MOUNTING TYPE, REEL/TAPE LIST						
	REEL SIZE (mm)		TAPE SIZE (mm)			QTY
	A	G	P ₁	W	K ₀	PCS/REEL
PA5006/PM2206	Ø330	16.4	12	16	2.3	2000

Typical Performance Curves

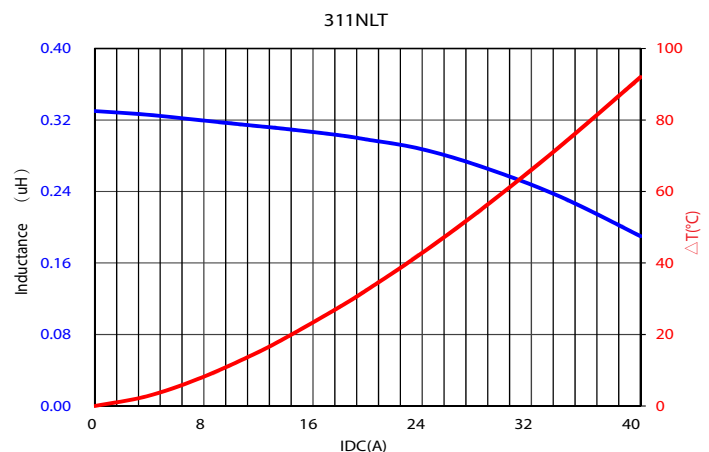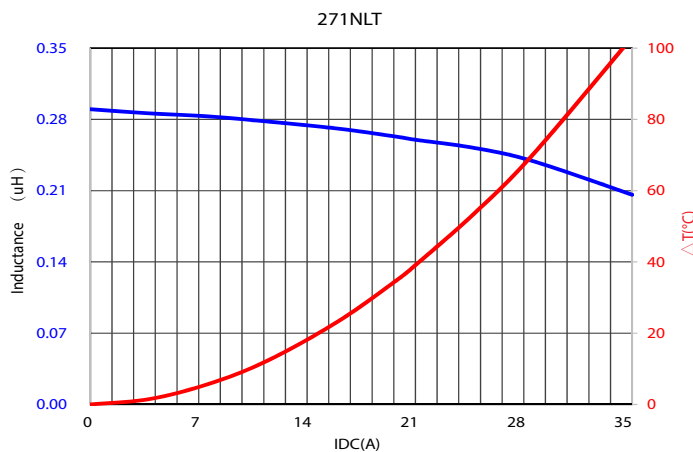

SMT Power Inductors


High Current Composite Inductor - PA5006.XXXNLT and PM2206.XXXNLT

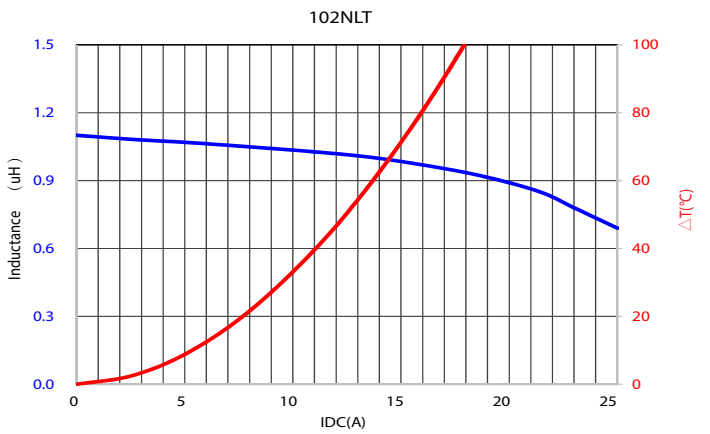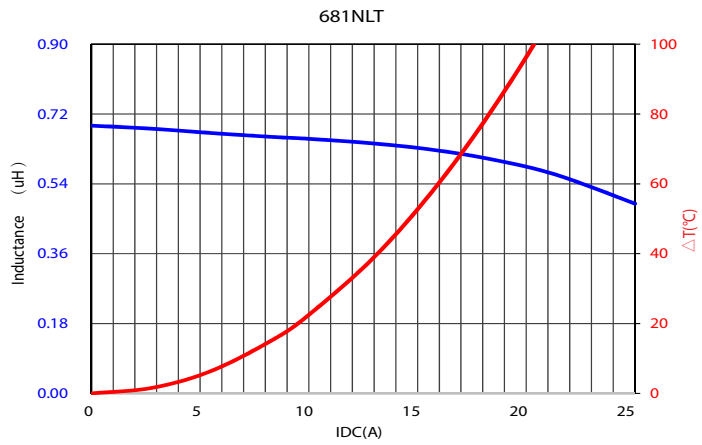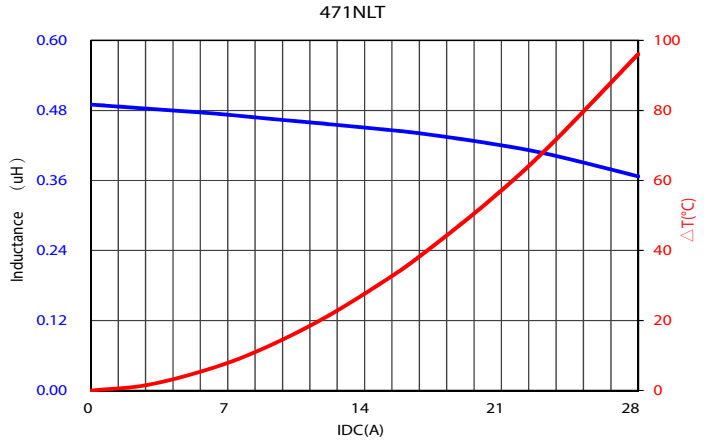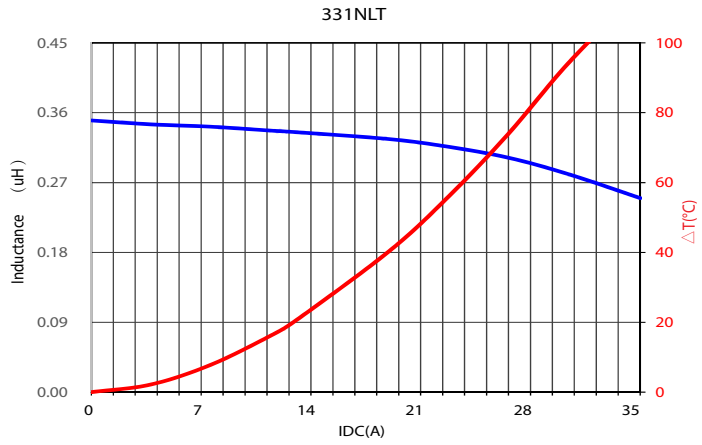

SMT Power Inductors

High Current Composite Inductor - PA5006.XXXNLT and PM2206.XXXNLT

CORE LOSS vs FLUX DENSITY

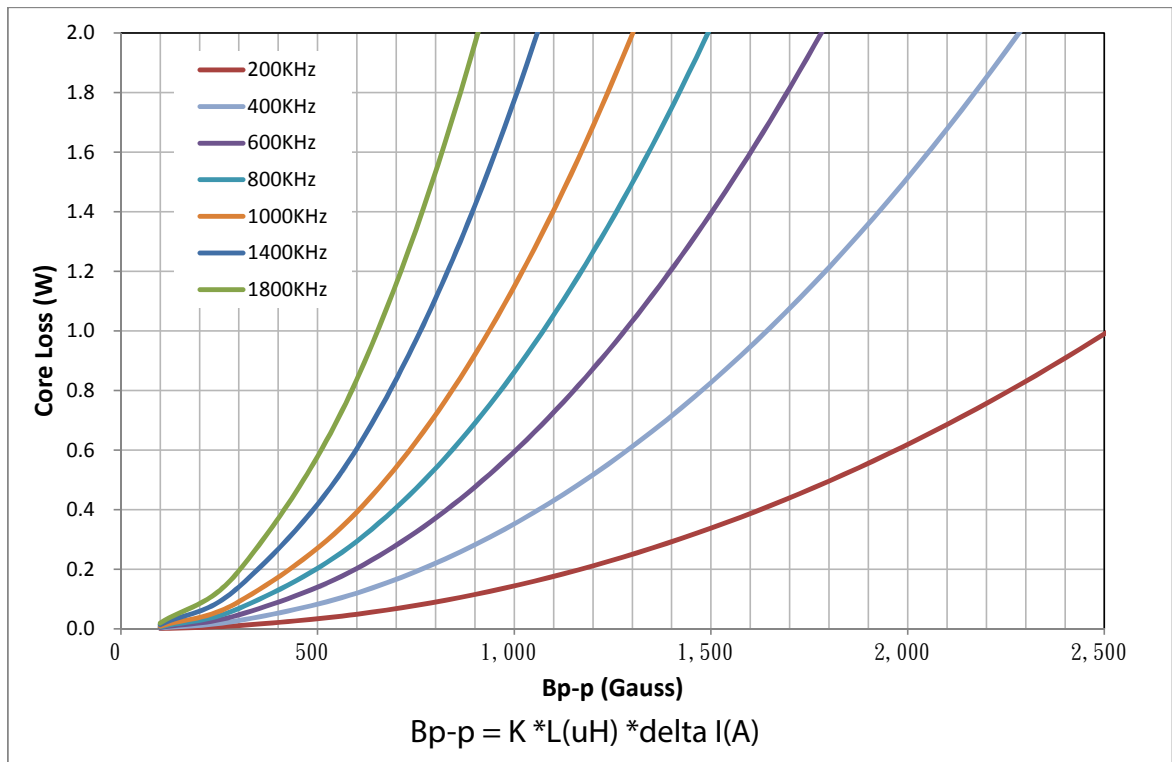

For More Information:

Americas - prodinfo_power@pulseelectronics.com | Europe - power-apps-europe@pulseelectronics.com | Asia - power-apps-asia@pulseelectronics.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2021. Pulse Electronics, Inc. All rights reserved.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.