

PM4346.331NLT Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	PM4346.331NLT-DG
Manufacturer	Pulse Electronics
Manufacturer Product Number	PM4346.331NLT
Description	FIXED IND 330NH 42A SMD
Detailed Description	330 nH Unshielded Molded Inductor 42 A Nonstandard



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

PM4346.331NLT

Series:

PM4346

Type:

Molded

Inductance:

330 nH

Current Rating (Amps):

42 A

Shielding:

Unshielded

Q @ Freq:

-

Ratings:

AEC-Q200

Inductance Frequency - Test:

100 kHz

Mounting Type:

Surface Mount

Supplier Device Package:

-

Height - Seated (Max):

0.197" (5.00mm)

Manufacturer:

Pulse Electronics

Product Status:

Active

Material - Core:

-

Tolerance:

±20%

Current - Saturation (Isat):

80A

DC Resistance (DCR):

-

Frequency - Self Resonant:

90MHz

Operating Temperature:

-55°C ~ 125°C

Features:

-

Package / Case:

Nonstandard

Size / Dimension:

0.531" L x 0.492" W (13.50mm x 12.50mm)

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8504.50.4000

Moisture Sensitivity Level (MSL):


1 (Unlimited)

ECCN:

EAR99

SMT Power Inductor

High Current Molded Power Inductor - PA4346 & PM4346 Series

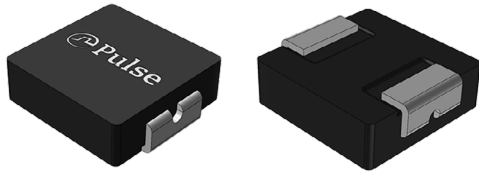

- Ⓢ **Height:** 5mm Max
- Ⓢ **Footprint:** 14mm x 12.8mm Max
- Ⓢ **Current Rating:** up to 24A
- Ⓢ **Inductance Range:** 1uH to 47uH
- Ⓢ High current, low DCR, and high efficiency
- Ⓢ High reliability
- Ⓢ Minimized acoustic noise and minimized leakage flux noise
- Ⓢ 200 Vdc Isolation Between Terminal and Core
- Ⓢ Available in Commercial (PA) and Automotive (PM) grades

Electrical Specifications @ 25°C - Operating Temperature -55°C to +125°C

Commercial ^{6,7}	Automotive ^{6,7}	Inductance ⁵ 100KHz, 1.0V uH±20%	DC Resistance			Saturation ² Current
			Rated ³ Current	DC Resistance		TYP.
			TYP. A	TYP. mΩ	MAX. mΩ	A
PA4346.101NLT	PA4346.101NLT	0.10	55	.35	.45	120
PA4346.201NLT	PM4346.201NLT	0.2	52	0.45	0.55	110
PA4346.221NLT	PM4346.221NLT	0.22	52	0.5	0.7	110
PA4346.331NLT	PM4346.331NLT	0.33	42	0.7	0.9	80
PA4346.361NLT	PM4346.361NLT	0.36	42	0.75	0.95	75
PA4346.391NLT	PM4346.391NLT	0.39	42	0.78	0.95	70
PA4346.471NLT	PM4346.471NLT	0.47	38	0.86	1.1	65
PA4346.501NLT	PM4346.501NLT	0.5	37	0.9	1.3	60
PA4346.561NLT	PM4346.561NLT	0.56	36	1	1.5	55
PA4346.681NLT	PM4346.681NLT	0.68	34	1.4	1.7	54
PA4346.821NLT	PM4346.821NLT	0.82	31	1.7	2.1	52
PA4346.103NLT	PA4346.103NLT	10.0	9.0	21.4	25.5	16
PA4346.183NLT	PA4346.183NLT	18.0	7.5	40	45	11
PA4346.102NLT	PM4346.102NLT	1	29	1.85	2.5	50
PA4346.122NLT	PM4346.122NLT	1.2	28	2.5	3	49
PA4346.152NLT	PM4346.152NLT	1.5	27	2.8	3.3	48
PA4346.182NLT	PM4346.182NLT	1.8	21	4	4.9	40
PA4346.222NLT	PM4346.222NLT	2.2	20	4.2	5.5	32
PA4346.332NLT	PM4346.332NLT	3.3	15	6.8	9.2	32
PA4346.472NLT	PM4346.472NLT	4.7	12	11.4	15	27
PA4346.562NLT	PM4346.562NLT	5.6	11.5	12.3	16.5	22
PA4346.602NLT	PM4346.602NLT	6	11.5	13	16.5	21.5

SMT Power Inductor

High Current Molded Power Inductor - PA4346 & PM4346 Series




Commercial ^{6,7}	Automotive ^{6,7}	Inductance ⁵ 100KHz, 1.0V uH±20%	Rated Current	DC Resistance		Saturation Current
			TYP.	TYP.	MAX.	TYP.
			A	mΩ	mΩ	A
PA4346.682NLT	PM4346.682NLT	6.8	11	14.5	18.5	21
PA4346.822NLT	PM4346.822NLT	8.2	9.5	16.8	22.5	18
PA4346.223NLT	PM4346.223NLT	22	6.5	50	58	10
PA4346.333NLT	PM4346.333NLT	33	5	73	88	8

Notes:

- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- The saturation current is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- The rated current is the DC current required to raise the component temperature by approximately 40°C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- The part temperature (ambient+temp rise) should not exceed 125°C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- Please note that the inductance tolerance of all parts are ±20%, except those indicated by an * which are +/- 30%.
- Parts shown in bold are standard catalog parts and are available through sample stock and distribution. Parts in lighter font are available but are not necessarily held in sample stock or distribution **and lead times may be longer**. Please contact Pulse for availability.
- The PM prefix parts are AEC-Q200 qualified and has full automotive IATF16949 certification. The mechanical dimensions are 100% tested in production but do not necessarily meet a product capability index (Cpk) 1.33 and therefore may not strictly conform to PPAP.
- Special characteristics ☹

Mechanical

PA4346/PM4346

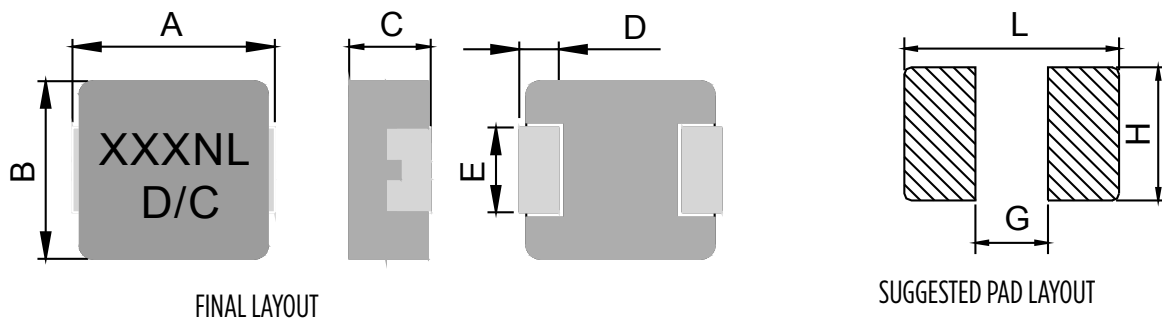

Series	A	B	C	D	E	L	G	H
PA4346/PM4346	13.5+/-0.5	12.5+/-0.3	4.8+/-0.2	2.3+/-0.3	4.7+/-0.3	14.2	8	5


All Dimensions in mm.

SMT Power Inductor

High Current Molded Power Inductor - PA4346 & PM4346 Series



TAPE & REEL INFO

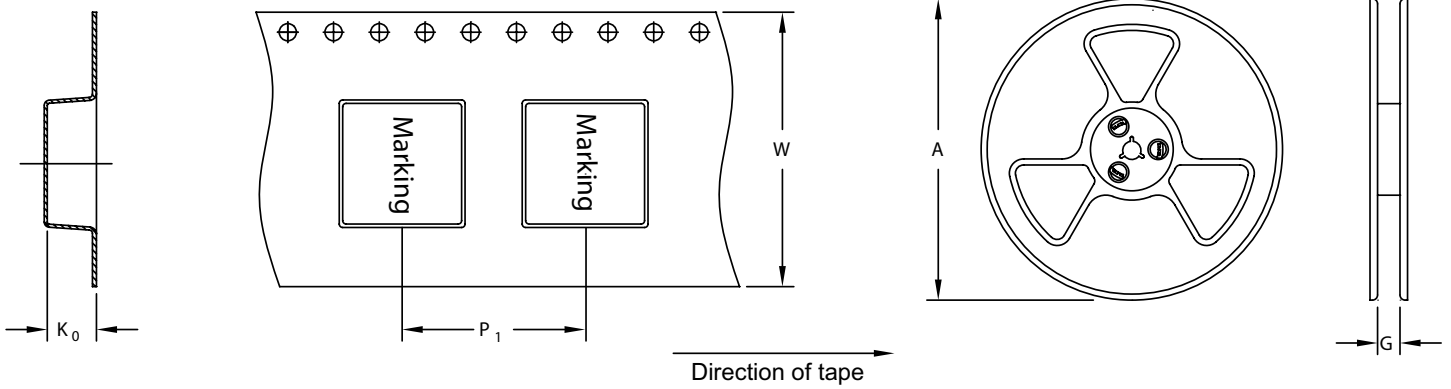

SURFACE MOUNTING TYPE, REEL/TAPE LIST						
	REEL SIZE (mm)		TAPE SIZE (mm)			QTY
	A	G	P ₁	W	K ₀	PCS/REEL
PA4346/PM4346	Ø330	24.4	16	24	4	500


SMT Power Inductor

High Current Molded Power Inductor - PA4346 & PM4346 Series









Typical Performance Curves

PA/PM4346.XXXNLT

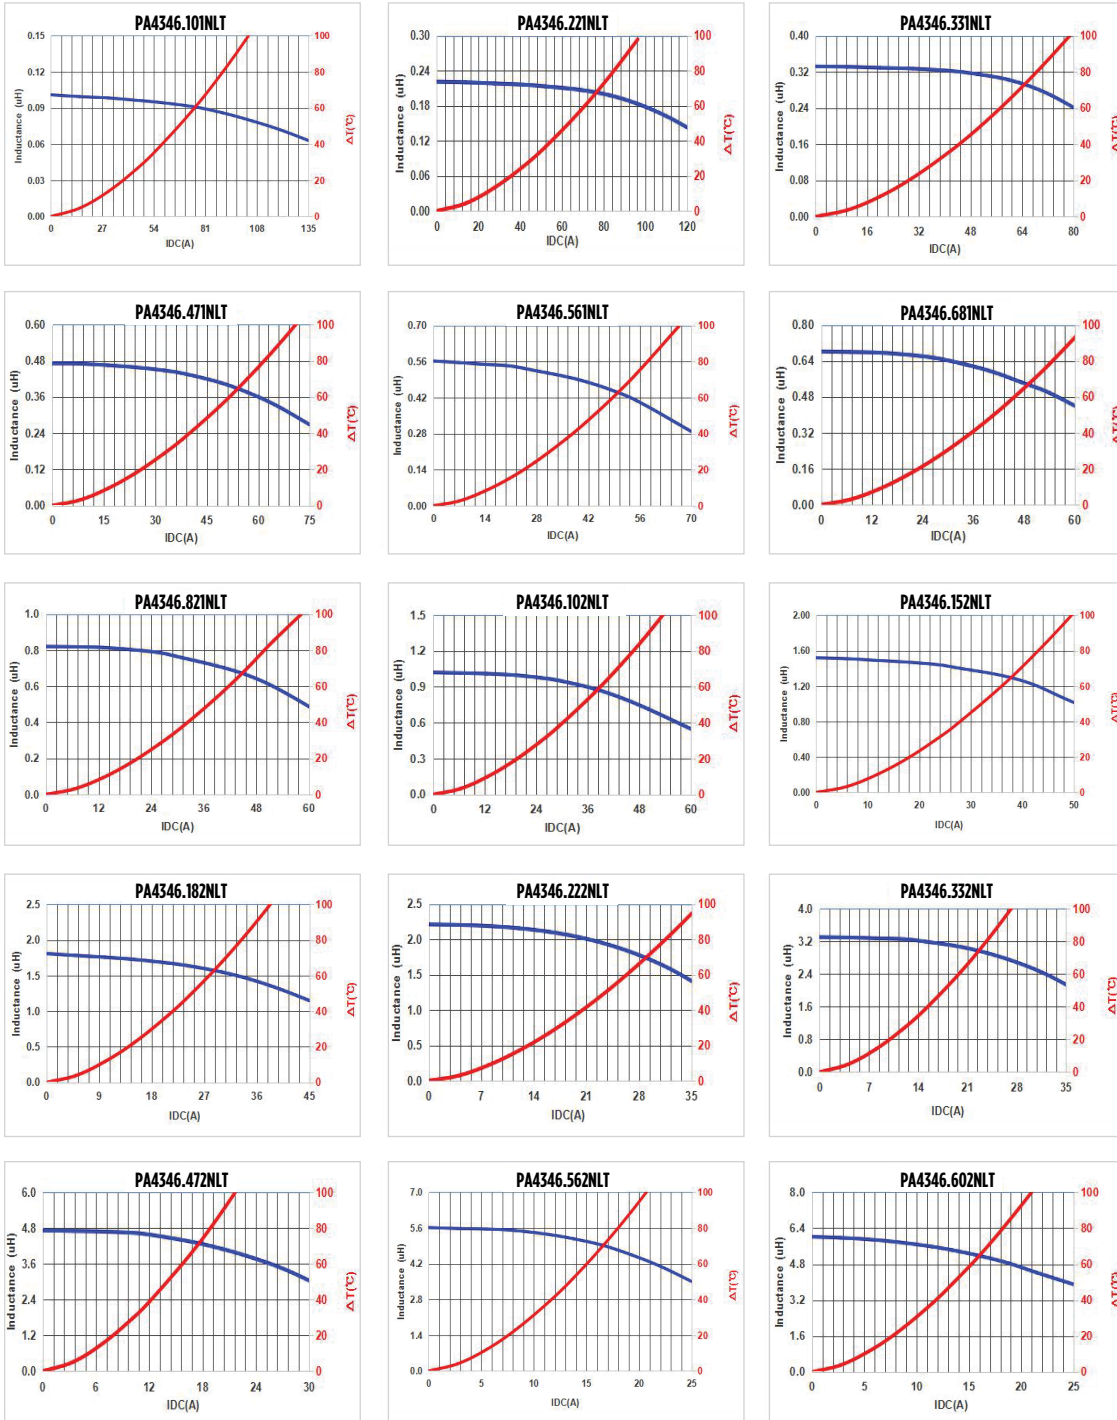

SMT Power Inductor

High Current Molded Power Inductor - PA4346 & PM4346 Series

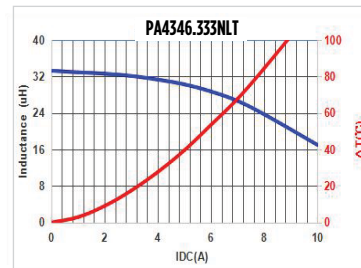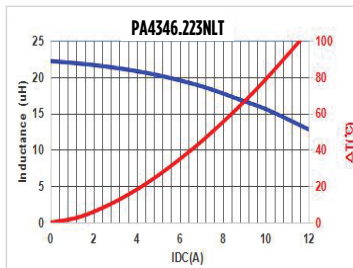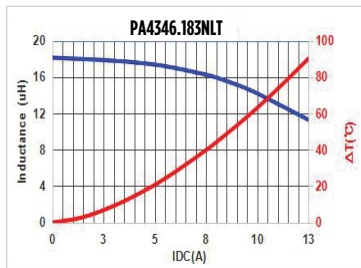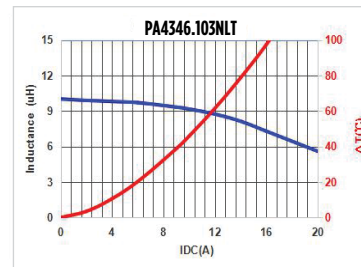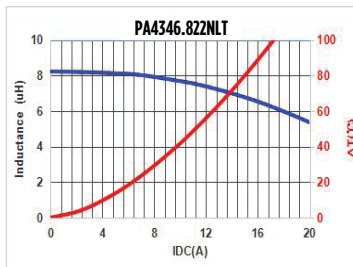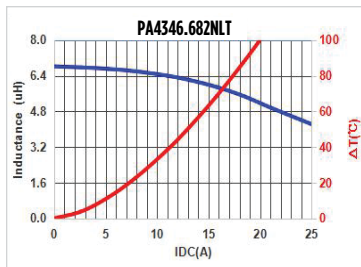

For More Information:

Americas - prodinfo_power@pulseelectronics.com | Europe - power-apps-europe@pulseelectronics.com | Asia - power-apps-asia@pulseelectronics.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. Pulse Electronics, Inc. All rights reserved.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.