


# CAR0603-47KB1 Datasheet

www.digi-electronics.com



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	CAR0603-47KB1-DG
Manufacturer	<a href="#">Riedon</a>
Manufacturer Product Number	CAR0603-47KB1
Description	RES SMD 47K OHM 0.1% 1/16W 0603
Detailed Description	47 kOhms $\pm$ 0.1% 0.063W, 1/16W Chip Resistor 0603 (1608 Metric) Thin Film

This model CAR0603-47KB1 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

CAR0603-47KB1

Series:

CAR

Resistance:

47 kOhms

Power (Watts):

0.063W, 1/16W

Features:

-

Operating Temperature:

-55°C ~ 155°C

Supplier Device Package:

0603

Height - Seated (Max):

0.022" (0.55mm)

Failure Rate:

-

Manufacturer:

Riedon

Product Status:

Active

Tolerance:

±0.1%

Composition:

Thin Film

Temperature Coefficient:

±25ppm/°C

Package / Case:

0603 (1608 Metric)

Size / Dimension:

0.061" L x 0.031" W (1.55mm x 0.80mm)

Number of Terminations:

2

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8533.21.0030

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

# CAR Series

Thin Film Precision Chip Resistor



- Resistances from 1 Ohm to 3M Ohms
- Power Rating 0.06 to 0.75 Watt
- Resistance Tolerances to  $\pm 0.01\%$
- TCR's to  $\pm 1$  ppm/ $^{\circ}\text{C}$
- Sizes: 0402 / 0603 / 0805 / 1206 / 2010 / 2512
- Operating Temperature:  $-55^{\circ}\text{C}$  to  $155^{\circ}\text{C}$

SPECIFICATIONS - STANDARD / HIGH POWER (HP)										
Package Size	Power Rating (W) at 70°C	MAX Operating Voltage <sup>1</sup>	MAX Overload Voltage <sup>2</sup>	Resistance Range (E24/E96)*					TCR PPM/ $^{\circ}\text{C}$	
				$\pm 0.01\%$	$\pm 0.05\%$	$\pm 0.1\%$	$\pm 0.25\%$	$\pm 0.5\%$		$\pm 1\%$
0402	0.0625	25V	50V	49.9 $\Omega$ - 4.99K $\Omega$			-		$\pm 1, \pm 2, \pm 3$	
				49.9 $\Omega$ - 20K $\Omega$					$\pm 5$	
				49.9 $\Omega$ - 20K $\Omega$		49.9 $\Omega$ - 100K $\Omega$			$\pm 10$	
						49.9 $\Omega$ - 69.8K $\Omega$			$\pm 15$	
0603	0.0625	50V	100V	24.9 $\Omega$ - 15K $\Omega$			-		$\pm 1, \pm 2, \pm 3$	
				24.9 $\Omega$ - 60K $\Omega$					$\pm 5$	
				24.9 $\Omega$ - 100K $\Omega$	4.7 $\Omega$ - 332K $\Omega$		4.7 $\Omega$ - 511K $\Omega$			$\pm 10, \pm 15$
				-	4.7 $\Omega$ - 1M $\Omega$		1 $\Omega$ - 1M $\Omega$		$\pm 25, \pm 50$	
0603 HP	0.100	75V	150V	24.9 $\Omega$ - 15K $\Omega$			-		$\pm 1, \pm 2, \pm 3$	
				24.9 $\Omega$ - 15K $\Omega$					$\pm 5$	
				24.9 $\Omega$ - 100K $\Omega$	4.7 $\Omega$ - 332K $\Omega$		4.7 $\Omega$ - 332K $\Omega$			$\pm 10, \pm 15$
						4.7 $\Omega$ - 1M $\Omega$		4.7 $\Omega$ - 1M $\Omega$		$\pm 25, \pm 50$
0805	0.100	100V	200V	24.9 $\Omega$ - 30K $\Omega$			-		$\pm 1, \pm 2, \pm 3$	
				24.9 $\Omega$ - 150K $\Omega$					$\pm 5$	
				24.9 $\Omega$ - 200K $\Omega$	4.7 $\Omega$ - 1M $\Omega$			$\pm 10, \pm 15$		
				-	4.7 $\Omega$ - 1M $\Omega$		4.7 $\Omega$ - 2M $\Omega$		1 $\Omega$ - 2M $\Omega$	
0805 HP	0.125	150V	300V	24.9 $\Omega$ - 30K $\Omega$			-		$\pm 1, \pm 2, \pm 3$	
				24.9 $\Omega$ - 30K $\Omega$					$\pm 5$	
				24.9 $\Omega$ - 200K $\Omega$	4.7 $\Omega$ - 511K $\Omega$		4.7 $\Omega$ - 511K $\Omega$			$\pm 10$
						4.7 $\Omega$ - 1M $\Omega$		4.7 $\Omega$ - 1M $\Omega$		$\pm 15$
1206	0.125	150V	300V	24.9 $\Omega$ - 49.9K $\Omega$			-		$\pm 1, \pm 2, \pm 3$	
				24.9 $\Omega$ - 300K $\Omega$					$\pm 5$	
				24.9 $\Omega$ - 499K $\Omega$	4.7 $\Omega$ - 1.5M $\Omega$			$\pm 10, \pm 15$		
				-	4.7 $\Omega$ - 1M $\Omega$		4.7 $\Omega$ - 2.49M $\Omega$		1 $\Omega$ - 2.49M $\Omega$	
1206 HP	0.250	200V	400V	24.9 $\Omega$ - 49.9K $\Omega$			-		$\pm 1, \pm 2, \pm 3$	
				24.9 $\Omega$ - 49.9K $\Omega$					$\pm 5$	
				24.9 $\Omega$ - 499K $\Omega$	4.7 $\Omega$ - 1M $\Omega$			$\pm 10, \pm 15, \pm 25, \pm 50$		

<sup>1</sup> Operating Voltage =  $\sqrt{P \cdot R}$  or MAX Listed, whichever is lower. | <sup>2</sup> Overload Voltage =  $2.5 \cdot \sqrt{P \cdot R}$  or MAX Listed, whichever is lower. | \* E24/E96 Consult Factory for available values

# CAR Series

Thin Film Precision Chip Resistor




SPECIFICATIONS - STANDARD / HIGH POWER (HP) continued										
Package Size	Power Rating (W) at 70°C	MAX Operating Voltage <sup>1</sup>	MAX Overload Voltage <sup>2</sup>	Resistance Range (E24/E96)*					TCR PPM/°C	
				±0.01%	±0.05%	±0.1%	±0.25%	±0.5%		±1%
2010	0.250	150V	300V	24.9Ω - 100KΩ			-		±1, ±2, ±3	
				24.9Ω - 300KΩ					±5	
				24.9Ω - 499KΩ	4.7Ω - 1MΩ			±10, ±15		
				-	4.7Ω - 1MΩ	4.7Ω - 3MΩ	1Ω - 3MΩ		±25, ±50	
2010 HP	0.333	200V	400V	24.9Ω - 49.9KΩ			-		±1, ±2, ±3	
				24.9Ω - 49.9KΩ					±5	
				24.9Ω - 499KΩ	4.7Ω - 1MΩ			±10, ±15, ±25, ±50		
2512	0.500	150V	300V	24.9Ω - 100KΩ			-		±1, ±2, ±3	
				24.9Ω - 300KΩ					±5	
				24.9Ω - 499KΩ	4.7Ω - 1MΩ			±10, ±15		
				-	4.7Ω - 1MΩ	4.7Ω - 3MΩ	1Ω - 3MΩ		±25, ±50	
2512 HP	0.750	200V	400V	24.9Ω - 2KΩ	4.7Ω - 2KΩ		1Ω - 2KΩ		±10, ±15, ±25, ±50	

<sup>1</sup> Operating Voltage =  $\sqrt{P \cdot R}$  or MAX Listed, whichever is lower. | <sup>2</sup> Overload Voltage =  $2.5 \cdot \sqrt{P \cdot R}$  or MAX Listed, whichever is lower. | \* E24/E96 Consult Factory for available values



Environmental Characteristics			
Test	Requirement		Conditions
	Tol. <0.05%	Tol. >0.05%	
TCR	As Spec.		+25/-55/+25/+125/+25°C
Short Time Overload	ΔR±0.05%	ΔR±0.2%	RCWV*2.5 or Max. overload voltage for 5 seconds
Insulation Resistance	>1000 MΩ		Apply 100VDC for 1 minute
Load Life	ΔR±0.05%	ΔR±0.2%	70±2°C, Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
	>7kΩ ΔR±0.5%		
	ΔR±0.5% for high power rating		
Damp Heat with Load	ΔR±0.05%	ΔR±0.3%	40±2°C, 90~95% R.H. Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
	ΔR±0.5% for high power rating		
Bending Strength	ΔR±0.05%	ΔR±0.2%	Bending amplitude 3 mm for 10 seconds
Solderability Terminal Finish = Nickel Tin	95% min. coverage		245±5°C for 3 seconds
Resistance to Soldering Heat	ΔR±0.05%	ΔR±0.2%	260±5°C for 10 seconds
Thermal Shock	ΔR±0.05%	ΔR±0.25%	-55°C~150°C, 100 cycles
Low Temperature Operation	ΔR±0.05%	ΔR±0.2%	1 hour, -65°C, followed by 45 minutes of RCWV
	ΔR±0.5% for high power rating		
Terminal Finish	Tin/Nickel		

# CAR Series

Thin Film Precision Chip Resistor

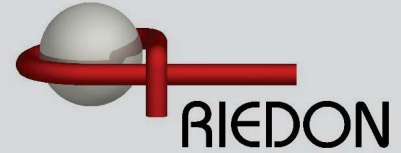


Power Derating Curve

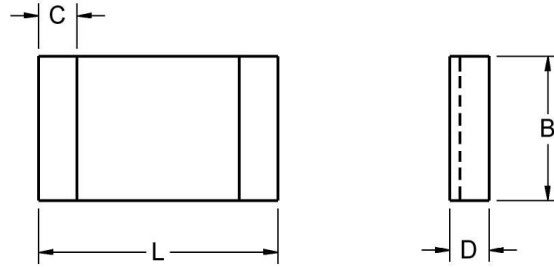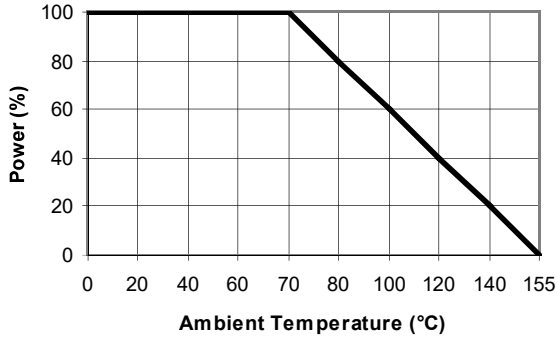

Dimensions (mm)					
Type	L	B	D	C	Mass (grams/1k)
CAR0402	1.00 ± 0.05	0.50 ± 0.05	0.30 ± 0.05	0.20 ± 0.10	0.54
CAR0603	1.55 ± 0.10	0.80 ± 0.10	0.45 ± 0.10	0.30 ± 0.20	1.83
CAR0805	2.00 ± 0.15	1.25 ± 0.15	0.55 ± 0.10	0.30 ± 0.20	4.71
CAR1206	3.05 ± 0.15	1.55 ± 0.15	0.55 ± 0.10	0.42 ± 0.20	9.02
CAR2010	4.90 ± 0.15	2.40 ± 0.15	0.55 ± 0.10	0.60 ± 0.30	23.61
CAR2512	6.30 ± 0.15	3.10 ± 0.15	0.55 ± 0.10	0.6 ± 0.30	38.06

Recommended Land Pattern (mm)

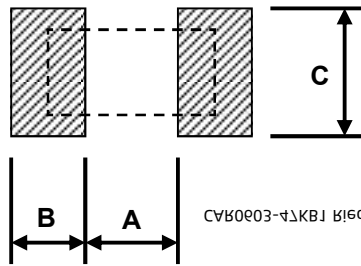

Type	A	B	C
CAR0402	0.50	0.50	0.60 ± 0.2
CAR0603	0.80	0.80	0.90 ± 0.2
CAR0805	1.00	1.00	1.35 ± 0.2
CAR1206	2.00	1.15	1.70 ± 0.2
CAR2010	3.60	1.40	2.50 ± 0.2
CAR2512	4.90	1.60	3.10 ± 0.2

## Ordering Information

Part Description: Part Type - Package Size- Resistance - Tolerance - TCR - HP option

Example: CAR0402 50 Ohms 0.05% 25ppm HP

(Note: if no TCR is specified: The highest value will be supplied)

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.