

# SY100EL14VZG Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	SY100EL14VZG-DG
Manufacturer	<a href="#">Microchip Technology</a>
Manufacturer Product Number	SY100EL14VZG
Description	IC CLK BUFFER 2:5 20SOIC
Detailed Description	Clock Fanout Buffer (Distribution), Multiplexer IC 2:5 20-SOIC (0.295", 7.50mm Width)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

SY100EL14VZG

Series:

100EL, Precision Edge®

Type:

Fanout Buffer (Distribution), Multiplexer

Ratio - Input:Output:

2:5

Input:

ECL, PECL

Voltage - Supply:

3V ~ 5.5V

Mounting Type:

Surface Mount

Supplier Device Package:

20-SOIC

Manufacturer:

Microchip Technology

Product Status:

Active

Number of Circuits:

1

Differential - Input:Output:

Yes/Yes

Output:

ECL, PECL

Operating Temperature:

-40°C ~ 85°C

Package / Case:

20-SOIC (0.295", 7.50mm Width)

Base Product Number:

SY100EL14

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8542.39.0001

Moisture Sensitivity Level (MSL):

2 (1 Year)

ECCN:

EAR99




## Ordering Information<sup>(1)</sup>

Part Number	Package Type	Operating Range	Package Marking	Lead Finish
SY100EL14VZG	Z20-1	Industrial	SY100EL14VZG with Pb-Free bar-line indicator	Pb-Free NiPdAu
SY100EL14VZG TR <sup>(2)</sup>	Z20-1	Industrial	SY100EL14VZG with Pb-Free bar-line indicator	Pb-Free NiPdAu

### Note:

- Contact factory for die availability. Dice are guaranteed at  $T_A = 25^\circ\text{C}$ , DC electricals only.
- Tape and Reel.

## Pin Configuration

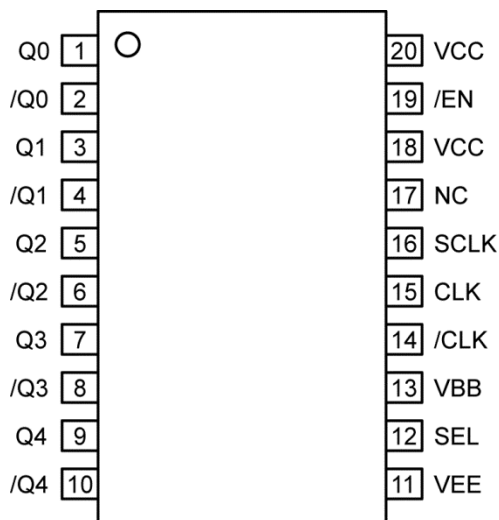

20-Pin Narrow SOIC  
(Top View)

## Pin Description

Pin	Function
CLK	Differential clock inputs
SCLK	Scan clock input
/EN	Synchronous enable
SEL	Clock select input
VBB	Reference output
Q0 – Q4	Differential clock outputs

## Truth Table

CLK	SCLK	SEL	/EN	Q
L	X	L	L	L
H	X	L	L	H
X	L	H	L	L
X	H	H	L	H
X	X	X	H	L <sup>(3)</sup>

### Note:

- On next negative transition of CLK or SCLK

**Absolute Maximum Ratings<sup>(4)</sup>**

Input Voltage ( $V_{IN}$ ) <sup>(6)</sup>	
( $V_{CC} = 0V$ , $V_{IN}$ not more positive than $V_{CC}$ ) ..	-6V to +0V
( $V_{EE} = 0V$ , $V_{IN}$ not more positive than $V_{CC}$ )...	+0V to +6V
Operating Range ( $V_{EE}$ ) <sup>(7)</sup> .....	-5.7V to -3.0V
Output Current ( $I_{OUT}$ ) Continuous.....	50mA
Surge.....	100mA
Lead Temperature (soldering, 20s).....	260°C
Storage Temperature ( $T_s$ ) .....	-65 to +150°C
ESD Rating <sup>(8)</sup> .....	>1.5kV

**Operating Ratings<sup>(5)</sup>**

Supply Voltage ( $V_{CC}$ ) PECL Operation .....	3.0V to 5.5V
( $V_{EE}$ ) ECL Operation .....	-3.0V to -5.5V
Ambient Temperature ( $T_A$ ) .....	-40°C to +85°C
Junction Thermal Resistance	
SOIC ( $\theta_{JA}$ ) .....	58°C/W

**DC Electrical Characteristics<sup>(9)</sup>**

$V_{EE} = V_{EE}(\text{min})$  to  $V_{EE}(\text{max})$ ;  $V_{CC} = \text{GND}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ , unless otherwise stated.

Outputs are terminated through a 50 $\Omega$  resistor to  $V_{CC}-2.0V$ .

Symbol	Parameter	Condition	Min.	Typ.	Max.	Units
$V_{OH}$	Output High Voltage <sup>(10)</sup>	$T_A = -40^\circ\text{C}$	$V_{CC} - 1.085$	$V_{CC} - 1.005$	$V_{CC} - 0.880$	V
		$T_A = 0^\circ\text{C}$ to $+85^\circ\text{C}$	$V_{CC} - 1.025$	$V_{CC} - 0.955$	$V_{CC} - 0.880$	V
$V_{OL}$	Output Low Voltage <sup>(10)</sup>	$T_A = -40^\circ\text{C}$	$V_{CC} - 1.830$	$V_{CC} - 1.695$	$V_{CC} - 1.555$	V
		$T_A = 0^\circ\text{C}$ to $+85^\circ\text{C}$	$V_{CC} - 1.810$	$V_{CC} - 1.705$	$V_{CC} - 1.620$	V
$V_{OHA}$	Output High Voltage <sup>(10)</sup>	$T_A = -40^\circ\text{C}$	$V_{CC} - 1.095$			V
		$T_A = 0^\circ\text{C}$ to $+85^\circ\text{C}$	$V_{CC} - 1.035$			V
$V_{OLA}$	Output Low Voltage <sup>(10)</sup>	$T_A = -40^\circ\text{C}$			$V_{CC} - 1.555$	V
		$T_A = 0^\circ\text{C}$ to $+85^\circ\text{C}$			$V_{CC} - 1.610$	V
$V_{IH}$	Input High Voltage		$V_{CC} - 1.165$		$V_{CC} - 0.880$	V
$V_{IL}$	Input Low Voltage		$V_{CC} - 1.810$		$V_{CC} - 1.475$	V
$I_{IL}$	Input Low Current <sup>(11)</sup>	Input LOW Current /CLK	0.5 -300			$\mu\text{A}$
$I_{IH}$	Input High Current				150	$\mu\text{A}$
$I_{EE}$	Power Supply Current	$T_A = -40^\circ\text{C}$ to $+25^\circ\text{C}$		32	40	mA
		$T_A = +85^\circ\text{C}$		34	42	
$V_{BB}$	Output Reference Voltage		$V_{CC} - 1.380$		$V_{CC} - 1.260$	V

**Notes:**

- Exceeding the absolute maximum ratings may damage the device.
- The device is not guaranteed to function outside its operating ratings.
- In PECL mode operation,  $V_{IN}(\text{max}) = V_{CC}$ .
- Parametric values specified at 100EL14V series: -3.0V to -5.5V.
- Devices are ESD sensitive. Handling precautions are recommended. Human body model, 1.5k $\Omega$  in series with 100pF.
- Specification for packaged product only
- $V_{IN} = V_{IH}(\text{max})$  or  $V_{IL}(\text{min})$ .
- $V_{IN} = V_{IL}(\text{max})$ .

## AC Electrical Characteristics

$V_{EE} = V_{EE}(\text{min})$  to  $V_{EE}(\text{max})$ ;  $V_{CC} = \text{GND}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ , unless otherwise stated.



Symbol	Parameter	Condition	Min.	Typ.	Max.	Units	
$t_{PLH}$ $t_{PHL}$	Propagation Delay CLK to Q (Diff)	$T_A = -40^\circ\text{C}$	520		720	ps	
		$T_A = 0^\circ\text{C}$	550		750	ps	
		$T_A = +25^\circ\text{C}$	580	680	780	ps	
		$T_A = +85^\circ\text{C}$	630		830	ps	
	Propagation Delay CLK to Q (SE)	$T_A = -40^\circ\text{C}$	470		770	ps	
		$T_A = 0^\circ\text{C}$	500		800	ps	
		$T_A = +25^\circ\text{C}$	530	680	830	ps	
		$T_A = +85^\circ\text{C}$	580		880	ps	
	Propagation Delay SCLK to Q	$T_A = -40^\circ\text{C}$	470		770	ps	
		$T_A = 0^\circ\text{C}$	500		800	ps	
		$T_A = +25^\circ\text{C}$	530	680	830	ps	
		$T_A = +85^\circ\text{C}$	580		880	ps	
$t_{skew}$	Part-to-Part Skew <sup>(12)</sup>				200	ps	
	Within-Device Skew				50	ps	
$t_S$	Setup Time /EN		150			ps	
$t_H$	Hold Time /EN		200			ps	
$V_{PP}$	Minimum Input Swing, CLK		150			mV	
$V_{CMR}$	Common Mode Range <sup>(13)</sup>	$V_{PP} < 500\text{mV}$	$T_A = -40^\circ\text{C}$	$V_{CC} - 2.000$		$V_{CC} - 0.400$	V
			$T_A = 0^\circ\text{C}$ to $+85^\circ\text{C}$	$V_{CC} - 2.100$		$V_{CC} - 0.400$	V
		$V_{PP} \geq 500\text{mV}$	$T_A = -40^\circ\text{C}$	$V_{CC} - 1.800$		$V_{CC} - 0.400$	V
			$T_A = 0^\circ\text{C}$ to $+85^\circ\text{C}$	$V_{CC} - 1.900$		$V_{CC} - 0.400$	V
$t_r/t_f$	Output Rise/Fall Time Q (20% - 80%)	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ Typical value at $T_A = +25^\circ\text{C}$	230	360	500	ps	
$t_{JITTER}$	Additive Jitter	Carrier = 622MHz Integration Range: 12kHz to 20MHz		70		$f_{SRMS}$	
		Carrier = 156.25MHz Integration Range: 12kHz to 20MHz		155			

### Notes:


- Skews are specified for identical LOW-to-HIGH or HIGH-to-LOW transitions.
- The  $V_{CMR}$  range is referenced to the most positive side of the differential input signal. Normal operation is obtained if the HIGH level falls within the specified range and the peak-to-peak voltage lies between  $V_{PP}(\text{min})$  and 1V. The lower end of the  $V_{CMR}$  range varies 1:1 with  $V_{EE}$ . The numbers in the specification table assume a nominal  $V_{EE}$  of 3.3V. For PECL operation, the  $V_{CMR}(\text{min})$  will be fixed at  $3.3\text{V} - |V_{CMR}(\text{min})|$ .

## Additive Phase Noise

$V_{CC} = +5V$ ,  $T_A = 25^\circ$ .

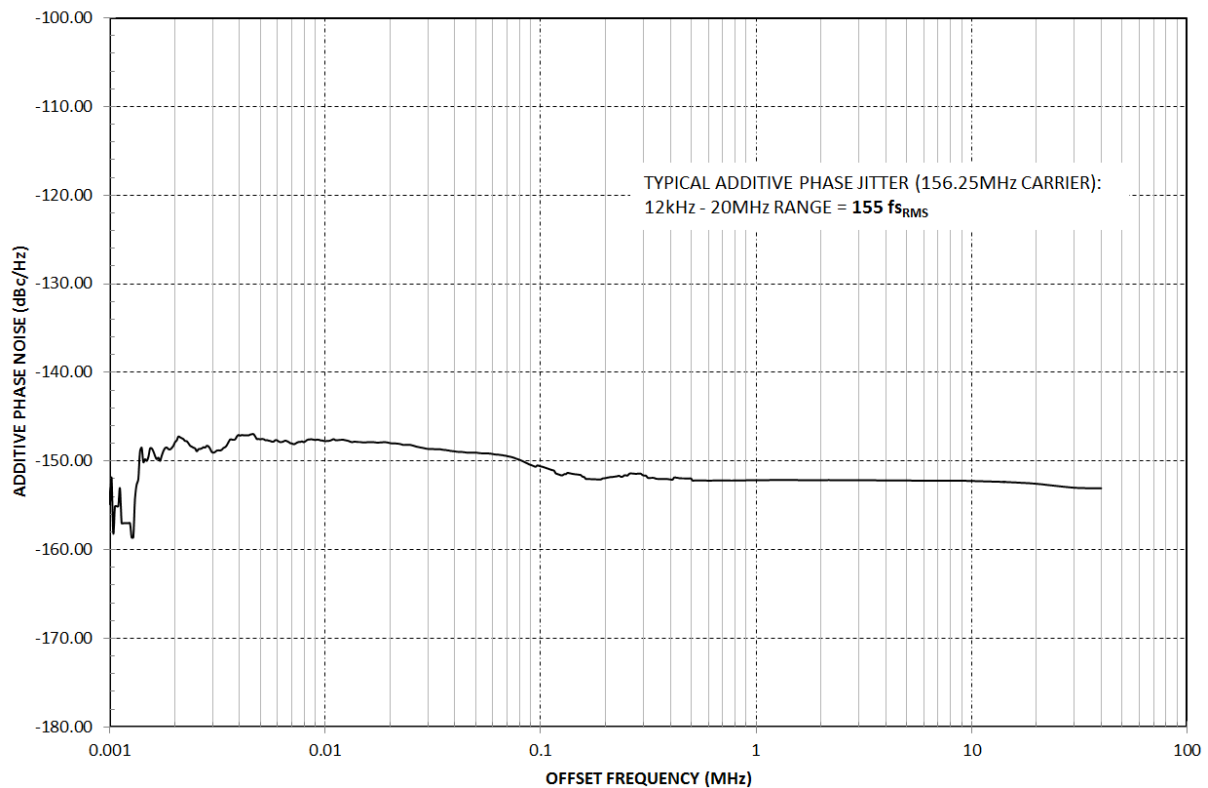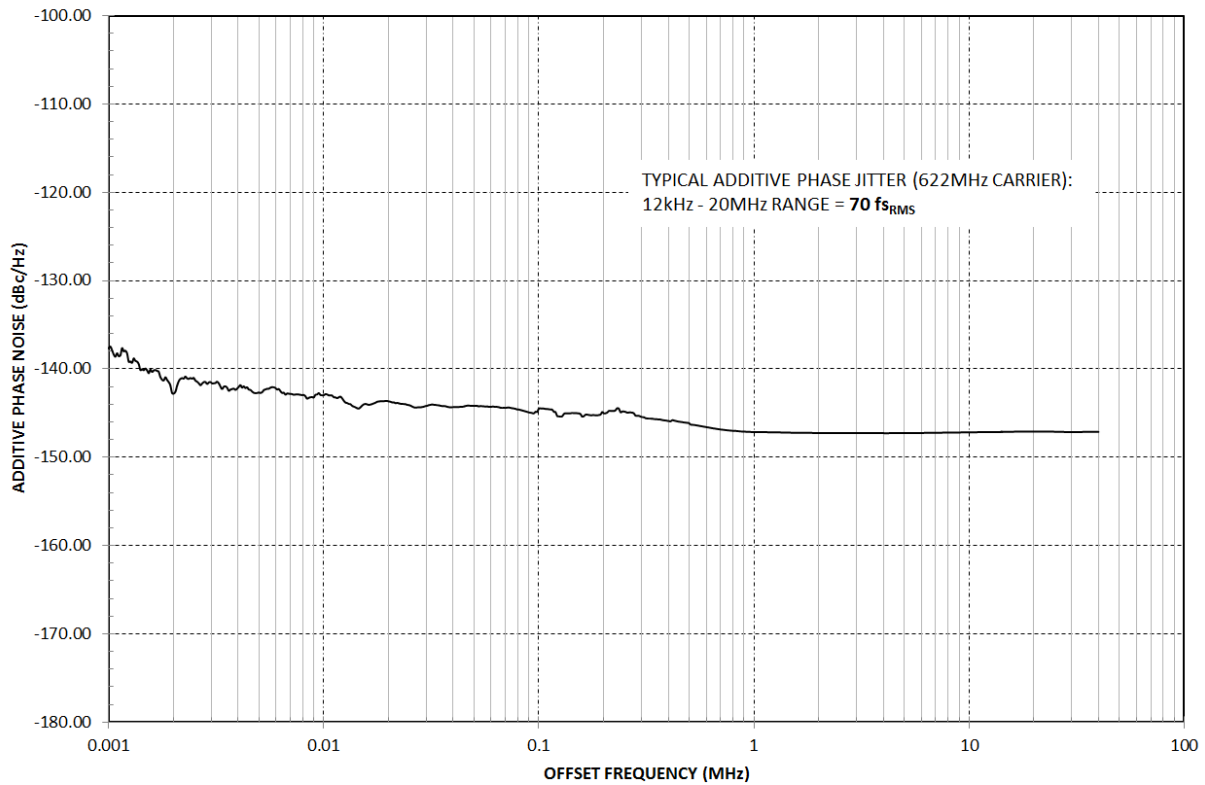

## Package Information<sup>(14)</sup>

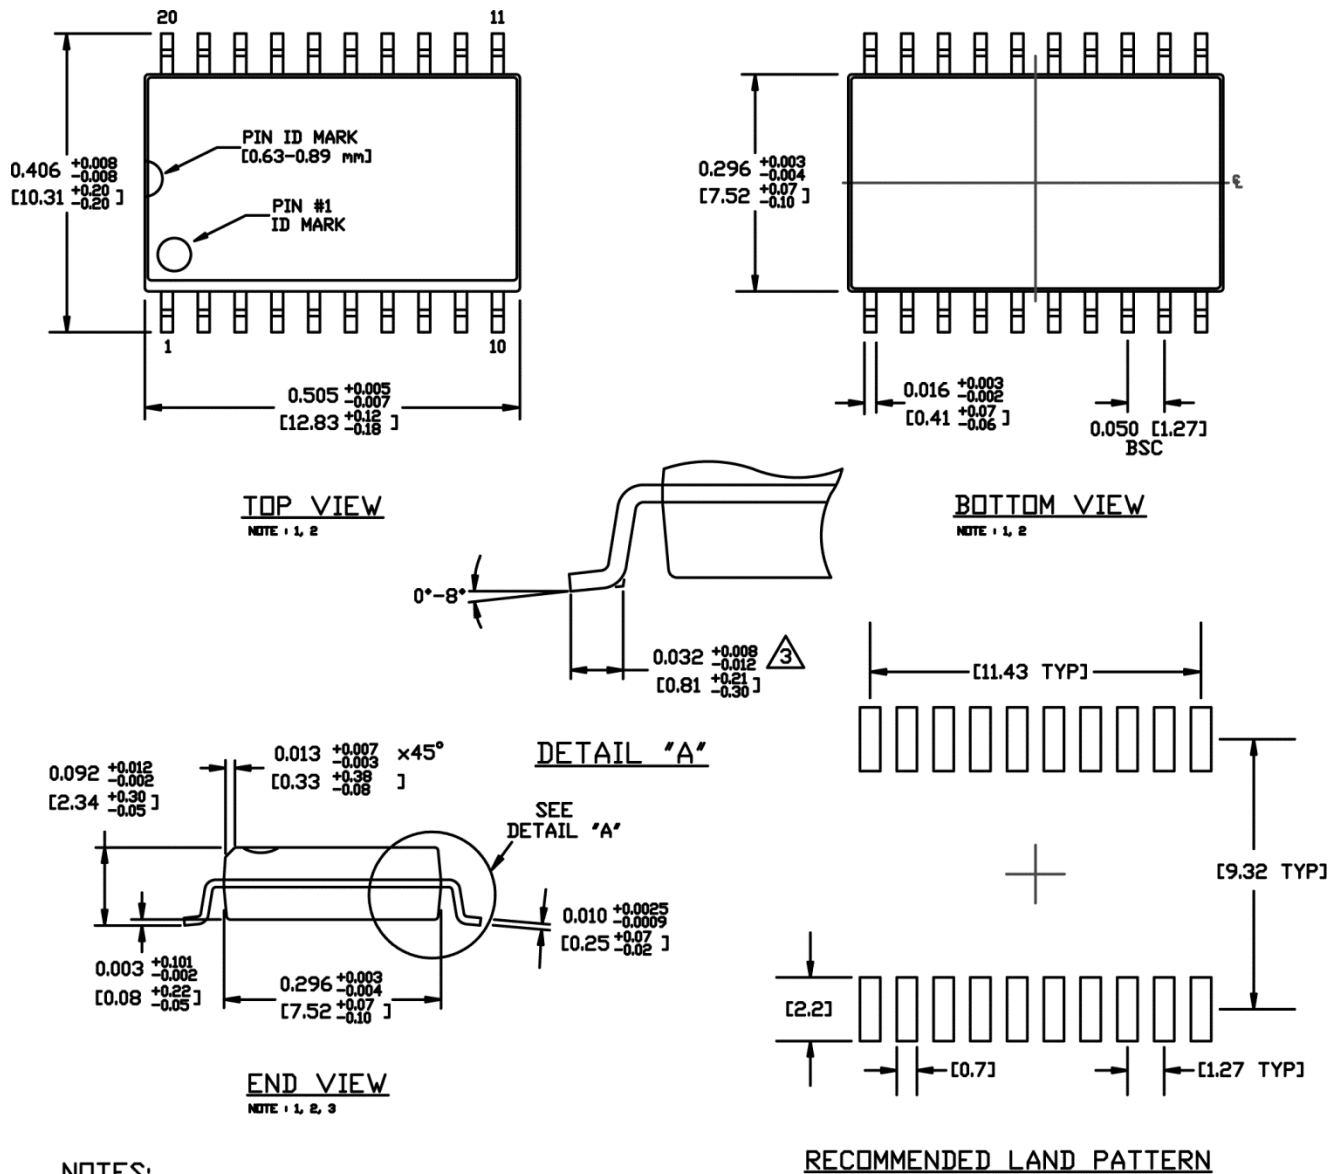

### NOTES:

1. DIMENSIONS ARE IN INCHES[MM].
2. CONTROLLING DIMENSION: INCHES.
3. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, EITHER OF WHICH SHALL NOT EXCEED 0.006[0.15] PER SIDE.

### 20-Pin Narrow SOIC (Z20-1)

### Note:

14. Package information is correct as of the publication date. For updates and most current information, go to [www.micrel.com](http://www.micrel.com).



---

**MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA**  
TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

Micrel, Inc. is a leading global manufacturer of IC solutions for the worldwide high performance linear and power, LAN, and timing & communications markets. The Company's products include advanced mixed-signal, analog & power semiconductors; high-performance communication, clock management, MEMs-based clock oscillators & crystal-less clock generators, Ethernet switches, and physical layer transceiver ICs. Company customers include leading manufacturers of enterprise, consumer, industrial, mobile, telecommunications, automotive, and computer products. Corporation headquarters and state-of-the-art wafer fabrication facilities are located in San Jose, CA, with regional sales and support offices and advanced technology design centers situated throughout the Americas, Europe, and Asia. Additionally, the Company maintains an extensive network of distributors and reps worldwide.

Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this datasheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.