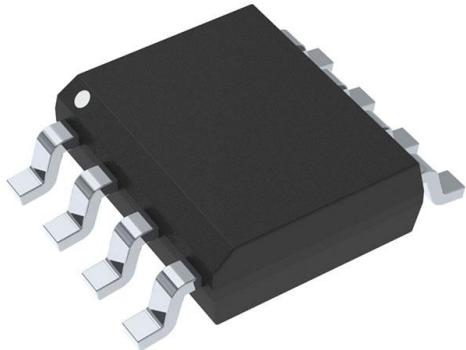


NE5534DR2 Datasheet

www.digi-electronics.com



DiGi Electronics Part Number	NE5534DR2-DG
Manufacturer	onsemi
Manufacturer Product Number	NE5534DR2
Description	IC OPAMP GP 1 CIRCUIT 8SOIC
Detailed Description	General Purpose Amplifier 1 Circuit 8-SOIC

<https://www.DiGi-Electronics.com>



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:	NE5534DR2	Manufacturer:	onsemi
Series:	-	Product Status:	Obsolete
Amplifier Type:	General Purpose	Number of Circuits:	1
Output Type:	-	Slew Rate:	13V/ μ s
Gain Bandwidth Product:	10 MHz	Current - Input Bias:	500 nA
Voltage - Input Offset:	500 μ V	Current - Supply:	4mA
Current - Output / Channel:	38 mA	Voltage - Supply Span (Min):	6 V
Voltage - Supply Span (Max):	40 V	Operating Temperature:	0°C ~ 70°C
Mounting Type:	Surface Mount	Package / Case:	8-SOIC (0.154", 3.90mm Width)
Supplier Device Package:	8-SOIC	Base Product Number:	NE5534

Environmental & Export classification

RoHS Status:	RoHS non-compliant	Moisture Sensitivity Level (MSL):	1 (Unlimited)
REACH Status:	REACH Unaffected	ECCN:	EAR99
HTSUS:	8542.33.0001		

NE5534, SA5534, SE5534, NE5534A, SA5534A, SE5534A



Single Low Noise Operational Amplifier

The NE/SA/SE5534/5534A are single high-performance low noise operational amplifiers. Compared to other operational amplifiers, such as TL083, they show better noise performance, improved output drive capability, and considerably higher small-signal and power bandwidths.

This makes the devices especially suitable for application in high quality and professional audio equipment, in instrumentation and control circuits and telephone channel amplifiers. The op amps are internally compensated for gain equal to, or higher than, three. The frequency response can be optimized with an external compensation capacitor for various applications (unity gain amplifier, capacitive load, slew rate, low overshoot, etc.).

Features

- Small-Signal Bandwidth: 10 MHz
- Output Drive Capability: 600Ω , 10 V_{RMS} at $V_S = \pm 18$ V
- Input Noise Voltage: $4 \text{ nV}/\sqrt{\text{Hz}}$
- DC Voltage Gain: 100000
- AC Voltage Gain: 6000 at 10 kHz
- Power Bandwidth: 200 kHz
- Slew Rate: 13 V/ μ s
- Large Supply Voltage Range: ± 3.0 to ± 20 V
- Pb-Free Packages are Available

Applications


- Audio Equipment
- Instrumentation and Control Circuits
- Telephone Channel Amplifiers
- Medical Equipment

ON Semiconductor®

<http://onsemi.com>

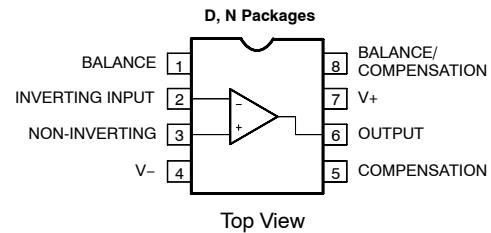


SOIC-8
D SUFFIX
CASE 751



PDIP-8
N SUFFIX
CASE 626

PIN CONNECTIONS

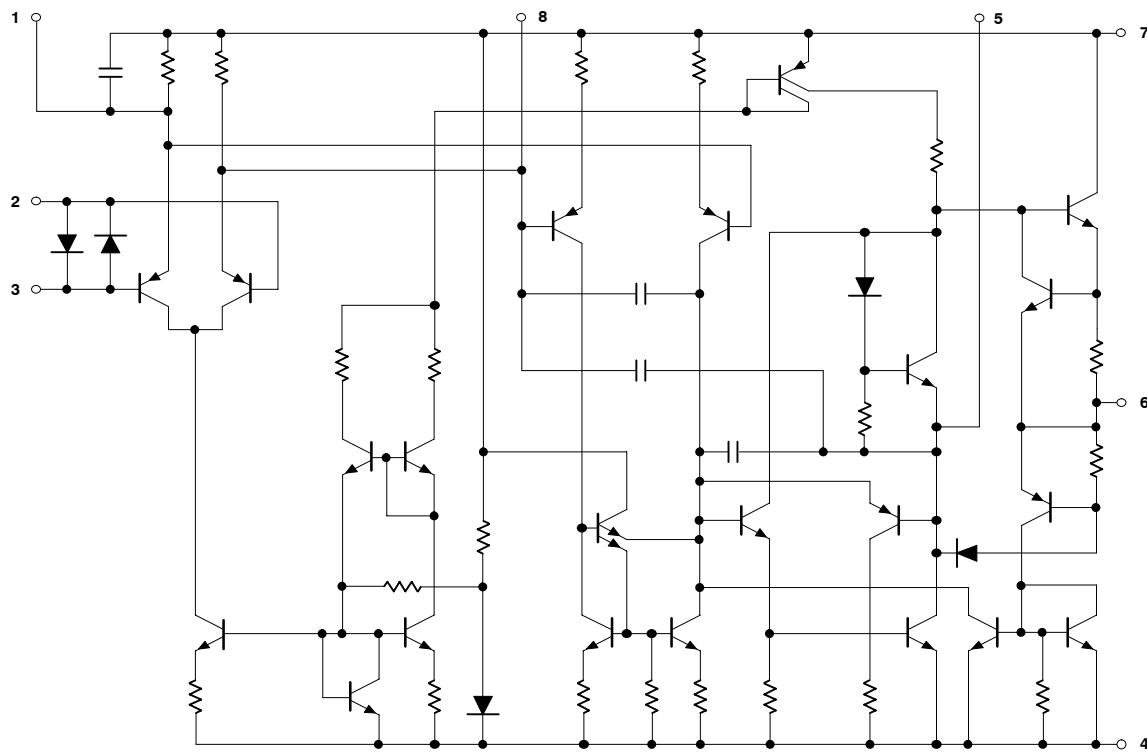


DEVICE MARKING INFORMATION

See general marking information in the device marking section on page 8 of this data sheet.

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 8 of this data sheet.

NE5534, SA5534, SE5534, NE5534A, SA5534A, SE5534A**Figure 1. Equivalent Schematic****MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Supply Voltage	V_S	± 22	V
Input Voltage	V_{IN}	$\pm V$ Supply	V
Differential Input Voltage (Note 1)	V_{DIFF}	± 0.5	V
Operating Temperature Range NE SA SE	T_{amb}	0 to +70 -40 to +85 -55 to +125	°C
Storage Temperature Range	T_{stg}	-65 to +150	°C
Junction Temperature	T_j	150	°C
Power Dissipation at 25°C	P_D	1150 750	mW
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	130 158	°C/W
Output Short-Circuit Duration (Note 2)	—	Indefinite	—
Lead Soldering Temperature (10 sec max)	T_{sld}	230	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Diodes protect the inputs against overvoltage. Therefore, unless current-limiting resistors are used, large currents will flow if the differential input voltage exceeds 0.6 V. Maximum current should be limited to ± 10 mA.
2. Output may be shorted to ground at $V_S = \pm 15$ V, $T_{amb} = 25^\circ\text{C}$. Temperature and/or supply voltages must be limited to ensure dissipation rating is not exceeded.

NE5534, SA5534, SE5534, NE5534A, SA5534A, SE5534ADC ELECTRICAL CHARACTERISTICS ($T_{amb} = 25^\circ\text{C}$; $V_S = \pm 15\text{ V}$, unless otherwise noted.) (Notes 3, 4 and 5)

Characteristic	Symbol	Test Conditions	NE/SA5534/5534A			SE5534/5534A			Unit
			Min	Typ	Max	Min	Typ	Max	
Offset Voltage	V_{OS}	Overtemperature	–	0.5	4.0	–	0.5	2.0	mV
	$\Delta V_{OS}/\Delta T$		–	–	5.0	–	–	3.0	mV
			–	5.0	–	–	5.0	–	$\mu\text{V}/^\circ\text{C}$
Offset Current	I_{OS}	Overtemperature	–	20	300	–	10	200	nA
	$\Delta I_{OS}/\Delta T$		–	–	400	–	–	500	nA
			–	200	–	–	200	–	$\text{pA}/^\circ\text{C}$
Input Current	I_B	Overtemperature	–	500	1500	–	400	800	nA
	$\Delta I_B/\Delta T$		–	–	2000	–	–	1500	nA
			–	5.0	–	–	5.0	–	$\text{nA}/^\circ\text{C}$
Supply Current Per Op Amp	I_{CC}	Overtemperature	–	4.0	8.0	–	4.0	6.5	mA
Common Mode Input Range	V_{CM}		± 12	± 13	–	± 12	± 13	–	V
Common Mode Rejection Ratio	CMRR		70	100	–	80	100	–	dB
Power Supply Rejection Ratio	PSRR		–	10	100	–	10	50	$\mu\text{V}/\text{V}$
Large-Signal Voltage Gain	A_{VOL}	$R_L \geq 600\ \Omega$, $V_O = \pm 10\text{ V}$ Overtemperature	25	100	–	50	100	–	V/mV
Output Swing	V_{OUT}	$R_L \geq 600\ \Omega$	± 12	± 13	–	± 12	± 13	–	V
		Overtemperature	± 10	± 12	–	± 10	± 12	–	
		$R_L \geq 600\ \Omega$; $V_S = \pm 18\text{ V}$	± 15	± 16	–	± 15	16	–	
		$R_L \geq 2.0\ \text{k}\Omega$	± 13	± 13.5	–	± 13	± 13.5	–	
		Overtemperature	± 12	± 12.5	–	± 12	± 12.5	–	
Input Resistance	R_{IN}		30	100	–	50	100	–	k Ω
Output Short Circuit Current	I_{SC}		–	38	–	–	38	–	mA

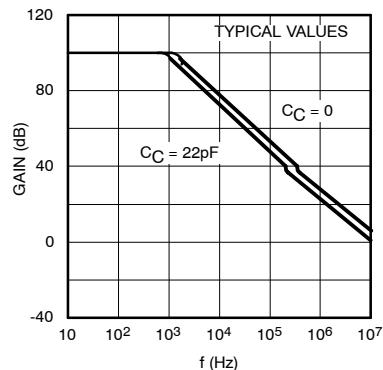
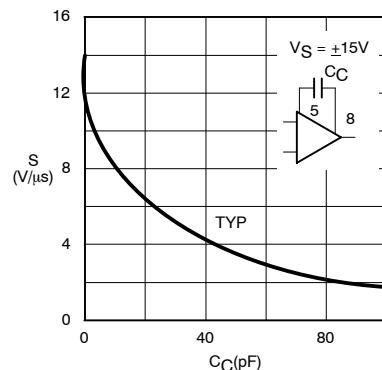
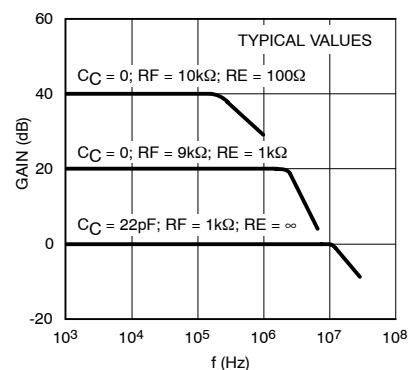
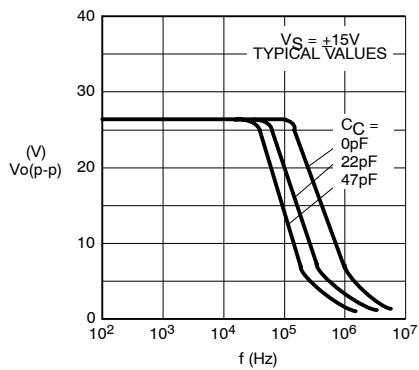
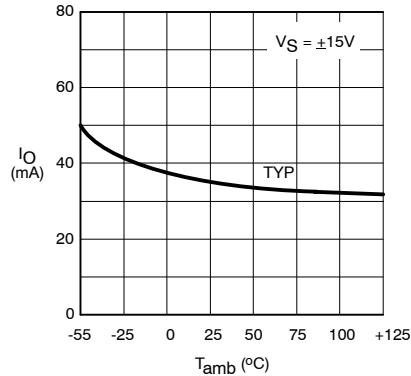
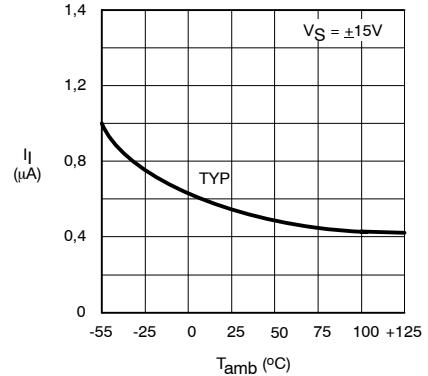
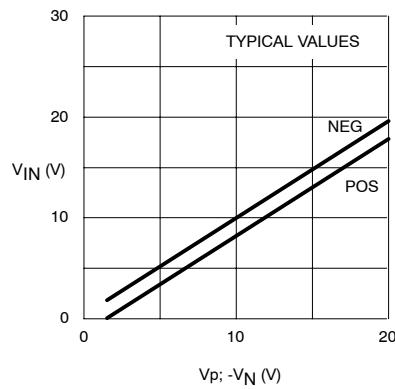
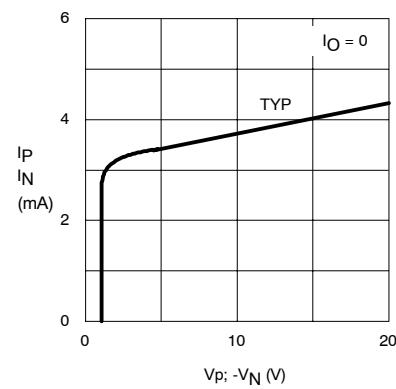
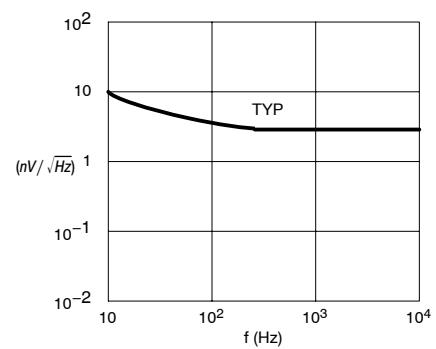
3. For NE5534/5534A, $T_{MIN} = 0^\circ\text{C}$, $T_{MAX} = 70^\circ\text{C}$.4. For SA5534/5534A, $T_{MIN} = -40^\circ\text{C}$, $T_{MAX} = +85^\circ\text{C}$.5. For SE5534/5534A, $T_{MIN} = -55^\circ\text{C}$, $T_{MAX} = +125^\circ\text{C}$.

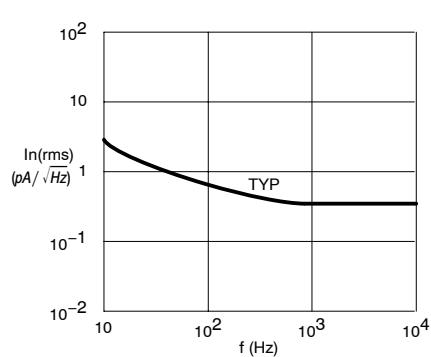
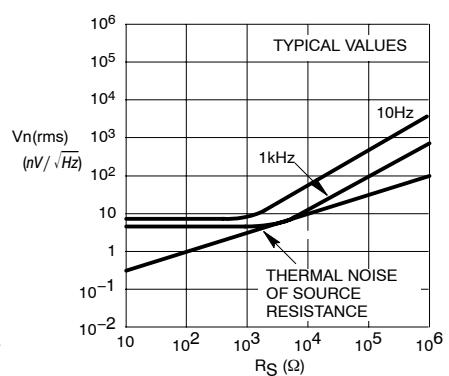
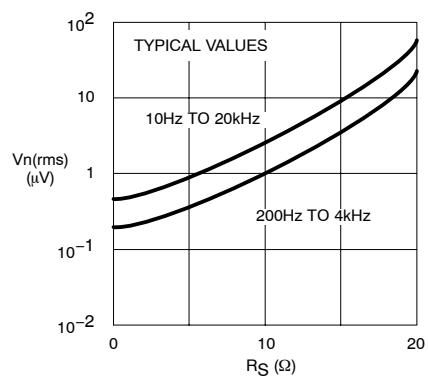
NE5534, SA5534, SE5534, NE5534A, SA5534A, SE5534A**AC ELECTRICAL CHARACTERISTICS** ($T_{amb} = 25^\circ\text{C}$; $V_S = \pm 15\text{ V}$, unless otherwise noted.)

Characteristic	Symbol	Test Conditions	NE/SA5534/5534A			SE5534/5534A			Unit
			Min	Typ	Max	Min	Typ	Max	
Output Resistance	R_{OUT}	$A_V = 30 \text{ dB}$ closed-loop $f = 10 \text{ kHz}$; $R_L = 600 \Omega$; $C_C = 22 \text{ pF}$	—	0.3	—	—	0.3	—	Ω
Transient Response		Voltage-follower; $V_{IN} = 50 \text{ mV}$ $R_L = 600 \Omega$, $C_C = 22 \text{ pF}$, $C_L = 100 \text{ pF}$							
Rise Time	t_R		—	20	—	—	20	—	ns
Overshoot	—		—	20	—	—	20	—	%
Transient Response		$V_{IN} = 50 \text{ mV}$, $R_L = 600 \Omega$, $C_C = 47 \text{ pF}$, $C_L = 500 \text{ pF}$							
Rise Time	t_R		—	50	—	—	50	—	ns
Overshoot	—		—	35	—	—	35	—	%
Gain	A_V	$f = 10 \text{ kHz}, C_C = 0$ $f = 10 \text{ kHz}, C_C = 22 \text{ pF}$	—	6.0	—	—	6.0	—	V/mV
Gain Bandwidth Product	GBW	$C_C = 22 \text{ pF}$, $C_L = 100 \text{ pF}$	—	10	—	—	10	—	MHz
Slew Rate	SR	$C_C = 0$ $C_C = 22 \text{ pF}$	—	13	—	—	13	—	V/ μs
Power Bandwidth	—	$V_{OUT} = \pm 10 \text{ V}$, $C_C = 0 \text{ pF}$ $V_{OUT} = \pm 10 \text{ V}$, $C_C = 22 \text{ pF}$ $V_{OUT} = \pm 14 \text{ V}$, $R_L = 600 \Omega$, $C_C = 22 \text{ pF}$, $V_{CC} = \pm 18 \text{ V}$	—	200	—	—	200	—	kHz
			—	95	—	—	95	—	
			—	70	—	—	70	—	

ELECTRICAL CHARACTERISTICS ($T_{amb} = 25^\circ\text{C}$; $V_S = 15 \text{ V}$, unless otherwise noted.)

Characteristic	Symbol	Test Conditions	NE/SA/SE5534			NE/SA/SE5534A			Unit
			Min	Typ	Max	Min	Typ	Max	
Input Noise Voltage	V_{NOISE}	$f_O = 30 \text{ Hz}$ $f_O = 1.0 \text{ kHz}$	—	7.0	—	—	5.5	7.0	nV/ $\sqrt{\text{Hz}}$
			—	4.0	—	—	3.5	4.5	
Input Noise Current	I_{NOISE}	$f_O = 30 \text{ Hz}$ $f_O = 1.0 \text{ kHz}$	—	2.5	—	—	1.5	—	pA/ $\sqrt{\text{Hz}}$
			—	0.6	—	—	0.4	—	
Broadband Noise Figure	—	$f = 10 \text{ Hz}$ to 20 kHz ; $R_S = 5.0 \text{ k}\Omega$	—	—	—	—	0.9	—	dB
Channel Separation	—	$f = 1.0 \text{ kHz}$; $R_S = 5.0 \text{ k}\Omega$	—	110	—	—	110	—	dB

NE5534, SA5534, SE5534, NE5534A, SA5534A, SE5534A**TYPICAL PERFORMANCE CHARACTERISTICS****Figure 2. Open-Loop Frequency Response****Figure 3. Slew Rate as a Function of Compensation Capacitance****Figure 4. Closed-Loop Frequency Response****Figure 5. Large-Signal Frequency Response****Figure 6. Output Short-Circuit Current****Figure 7. Input Bias Current****Figure 8. Input Common-Mode Voltage Range****Figure 9. Supply Current Per Op Amp****Figure 10. Input Noise Voltage Density**

NE5534, SA5534, SE5534, NE5534A, SA5534A, SE5534A**TYPICAL PERFORMANCE CHARACTERISTICS****Figure 11. Input Noise Current Density****Figure 12. Total Input Noise Density****Figure 13. Broadband Input Noise Voltage**

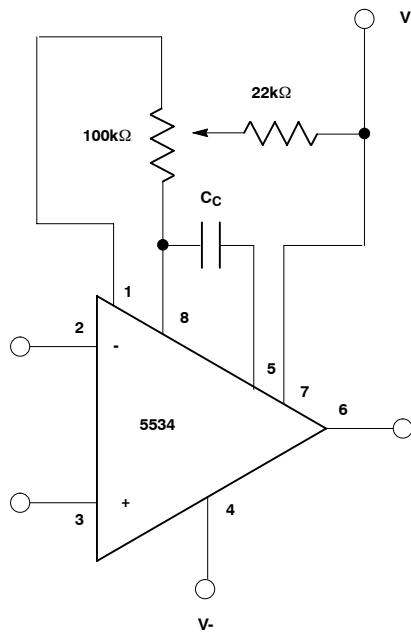
NE5534, SA5534, SE5534, NE5534A, SA5534A, SE5534A**TEST LOAD CIRCUITS**

Figure 14. Frequency Compensation and Offset Voltage Adjustment Circuit

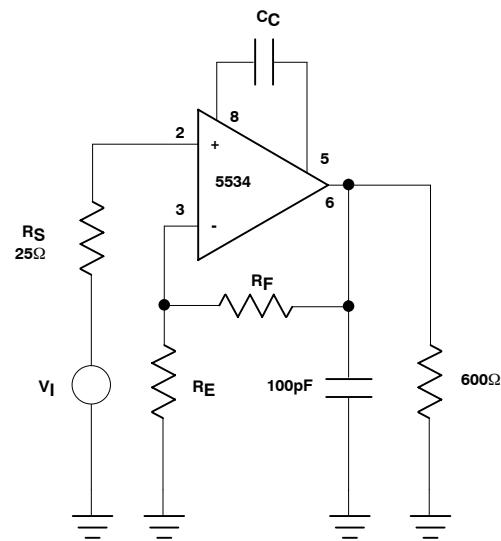


Figure 15. Closed-Loop Frequency Response

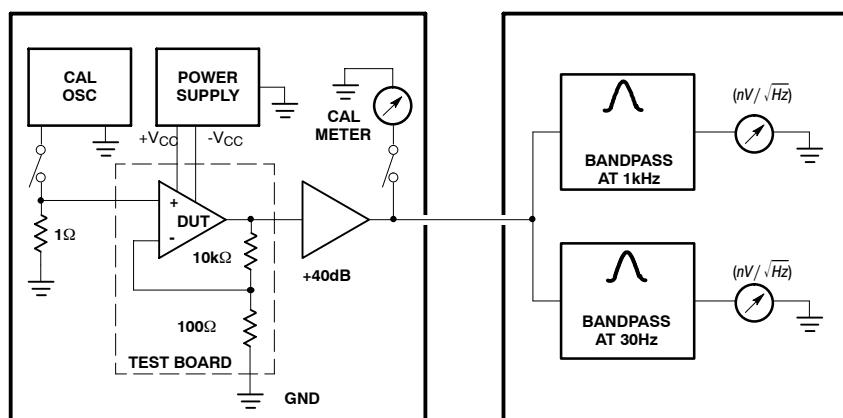








Figure 16. Noise Test Block Diagram

NE5534, SA5534, SE5534, NE5534A, SA5534A, SE5534A**MARKING DIAGRAMS**

**SOIC-8
D SUFFIX
CASE 751**

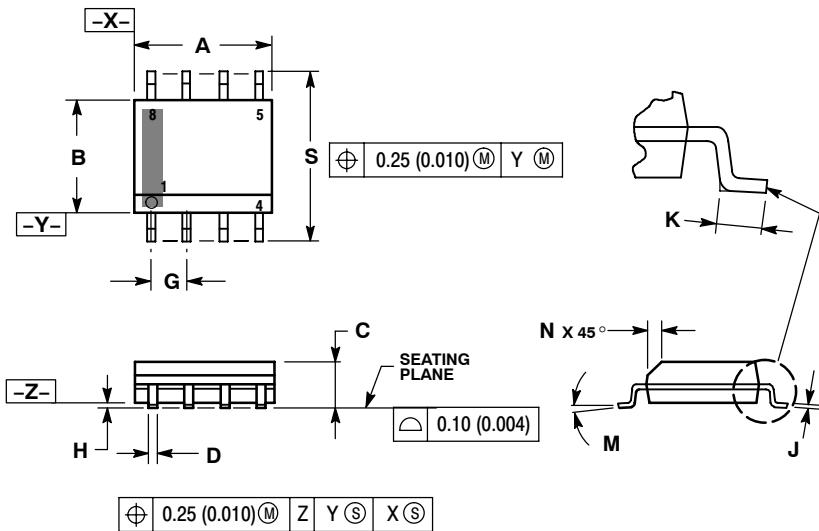
**PDIP-8
N SUFFIX
CASE 626**

x = Blank or A
 A = Assembly Location
 WL, L = Wafer Lot
 YY, Y = Year
 WW, W = Work Week
 G or ■ = Pb-Free Package

ORDERING INFORMATION

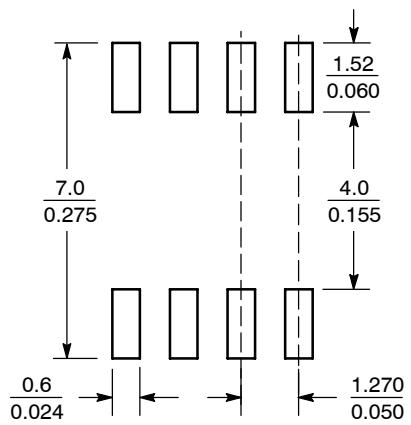
Device	Description	Temperature Range	Shipping [†]
NE5534AD	8-Pin Plastic Small Outline (SO-8) Package	0 to +70°C	98 Units / Rail
NE5534ADG	8-Pin Plastic Small Outline (SO-8) Package (Pb-Free)	0 to +70°C	98 Units / Rail
NE5534ADR2	8-Pin Plastic Small Outline (SO-8) Package	0 to +70°C	2500 / Tape & Reel
NE5534ADR2G	8-Pin Plastic Small Outline (SO-8) Package (Pb-Free)	0 to +70°C	2500 / Tape & Reel
NE5534AN	8-Pin Plastic Dual In-Line Package (PDIP-8)	0 to +70°C	50 Units / Rail
NE5534ANG	8-Pin Plastic Dual In-Line Package (PDIP-8) (Pb-Free)	0 to +70°C	50 Units / Rail
NE5534D	8-Pin Plastic Small Outline (SO-8) Package	0 to +70°C	98 Units / Rail
NE5534DG	8-Pin Plastic Small Outline (SO-8) Package (Pb-Free)	0 to +70°C	98 Units / Rail
NE5534DR2	8-Pin Plastic Small Outline (SO-8) Package	0 to +70°C	2500 / Tape & Reel
NE5534DR2G	8-Pin Plastic Small Outline (SO-8) Package (Pb-Free)	0 to +70°C	2500 / Tape & Reel
NE5534N	8-Pin Plastic Dual In-Line Package (PDIP-8)	0 to +70°C	50 Units / Rail
NE5534NG	8-Pin Plastic Dual In-Line Package (PDIP-8) (Pb-Free)	0 to +70°C	50 Units / Rail
SA5534AD	8-Pin Plastic Small Outline (SO-8) Package	-40 to +85°C	98 Units / Rail
SA5534ADG	8-Pin Plastic Small Outline (SO-8) Package (Pb-Free)	-40 to +85°C	98 Units / Rail
SA5534ADR2	8-Pin Plastic Small Outline (SO-8) Package	-40 to +85°C	2500 / Tape & Reel
SA5534ADR2G	8-Pin Plastic Small Outline (SO-8) Package (Pb-Free)	-40 to +85°C	2500 / Tape & Reel
SA5534AN	8-Pin Plastic Dual In-Line Package (PDIP-8)	-40 to +85°C	50 Units / Rail
SA5534ANG	8-Pin Plastic Dual In-Line Package (PDIP-8) (Pb-Free)	-40 to +85°C	50 Units / Rail
SA5534N	8-Pin Plastic Dual In-Line Package (PDIP-8)	-40 to +85°C	50 Units / Rail
SA5534NG	8-Pin Plastic Dual In-Line Package (PDIP-8) (Pb-Free)	-40 to +85°C	50 Units / Rail
SE5534AN	8-Pin Plastic Dual In-Line Package (PDIP-8)	-55 to +125°C	50 Units / Rail
SE5534ANG	8-Pin Plastic Dual In-Line Package (PDIP-8) (Pb-Free)	-55 to +125°C	50 Units / Rail
SE5534N	8-Pin Plastic Dual In-Line Package (PDIP-8)	-55 to +125°C	50 Units / Rail
SE5534NG	8-Pin Plastic Dual In-Line Package (PDIP-8) (Pb-Free)	-55 to +125°C	50 Units / Rail

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

NE5534, SA5534, SE5534, NE5534A, SA5534A, SE5534A**PACKAGE DIMENSIONS**
SOIC-8 NB
CASE 751-07
ISSUE AG


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETER.
 3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
 5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.
 6. 751-01 THRU 751-06 ARE OBSOLETE. NEW STANDARD IS 751-07.

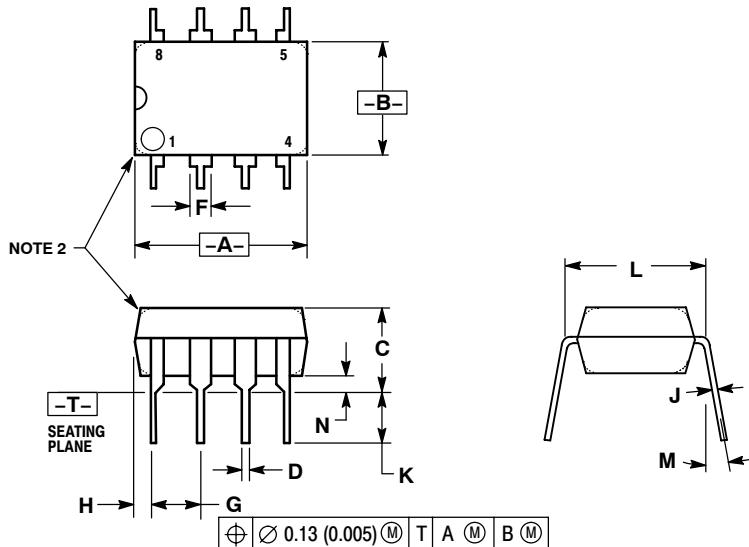
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.80	5.00	0.189	0.197
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.053	0.069
D	0.33	0.51	0.013	0.020
G	1.27	BSC	0.050	BSC
H	0.10	0.25	0.004	0.010
J	0.19	0.25	0.007	0.010
K	0.40	1.27	0.016	0.050
M	0 °	8 °	0 °	8 °
N	0.25	0.50	0.010	0.020
S	5.80	6.20	0.228	0.244

SOLDERING FOOTPRINT*SCALE 6:1 ($\frac{\text{mm}}{\text{inches}}$)

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

NE5534, SA5534, SE5534, NE5534A, SA5534A, SE5534A**PACKAGE DIMENSIONS****8-Pin Plastic Dual In-Line Package (PDIP-8)**

N SUFFIX
CASE 626-05
ISSUE L

**NOTES:**

1. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
2. PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.40	10.16	0.370	0.400
B	6.10	6.60	0.240	0.260
C	3.94	4.45	0.155	0.175
D	0.38	0.51	0.015	0.020
F	1.02	1.78	0.040	0.070
G	2.54 BSC		0.100 BSC	
H	0.76	1.27	0.030	0.050
J	0.20	0.30	0.008	0.012
K	2.92	3.43	0.115	0.135
L	7.62 BSC		0.300 BSC	
M	---	10°	---	10°
N	0.76	1.01	0.030	0.040

PUBLICATION ORDERING INFORMATION**LITERATURE FULFILLMENT:**

Literature Distribution Center for ON Semiconductor
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA

Phone: 480-829-7710 or 800-344-3860 Toll Free USA/Canada

Fax: 480-829-7709 or 800-344-3867 Toll Free USA/Canada

Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

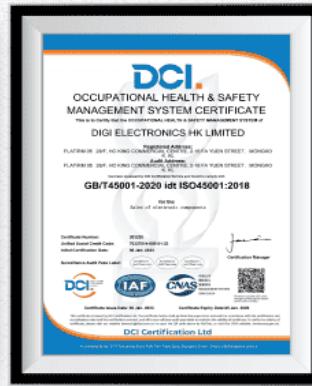
Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.