


# GP2S24 Datasheet

[www.digi-electronics.com](http://www.digi-electronics.com)

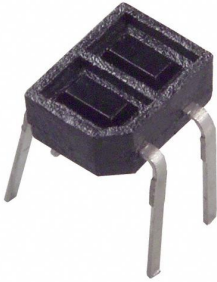

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	GP2S24-DG
Manufacturer	<a href="#">Sharp Microelectronics</a>
Manufacturer Product Number	GP2S24
Description	PHOTOINTERRUPTER REFLEC .8MM DIP
Detailed Description	Reflective Optical Sensor 0.031" (0.8mm) PCB Mount

This model GP2S24 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

GP2524

Series:

-

Sensing Distance:

0.031" (0.8mm)

Voltage - Collector Emitter Breakdown (Max):

35 V

Current - DC Forward (If) (Max):

50 mA

Response Time:

20µs, 20µs

Package / Case:

PCB Mount

Manufacturer:

Sharp Microelectronics

Product Status:

Obsolete

Sensing Method:

Reflective

Current - Collector (Ic) (Max):

20 mA

Output Type:

Phototransistor

Mounting Type:

Through Hole

Operating Temperature:

-25°C ~ 85°C

## Environmental & Export classification

RoHS Status:

RoHS non-compliant

ECCN:

EAR99

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8541.49.8000

# GP2S09/GP2S24/ GP2S26/GP2S27

## Subminiature Photointerrupter

### ■ Features

1. Compact and thin  
**GP2S09**: Compact DIP long lead type  
**GP2S24**: Compact DIP type  
**GP2S26**: Flat lead type  
**GP2S27**: Mini-flat package type


### ■ Applications

1. Cassette tape recorders, VCRs
2. Floppy disk drives
3. Various microcomputerized control equipment

2. Optimum detection distance: 0.6 to 0.8mm
3. Visible light cut-off type

### ■ Outline Dimensions

(Unit : mm)

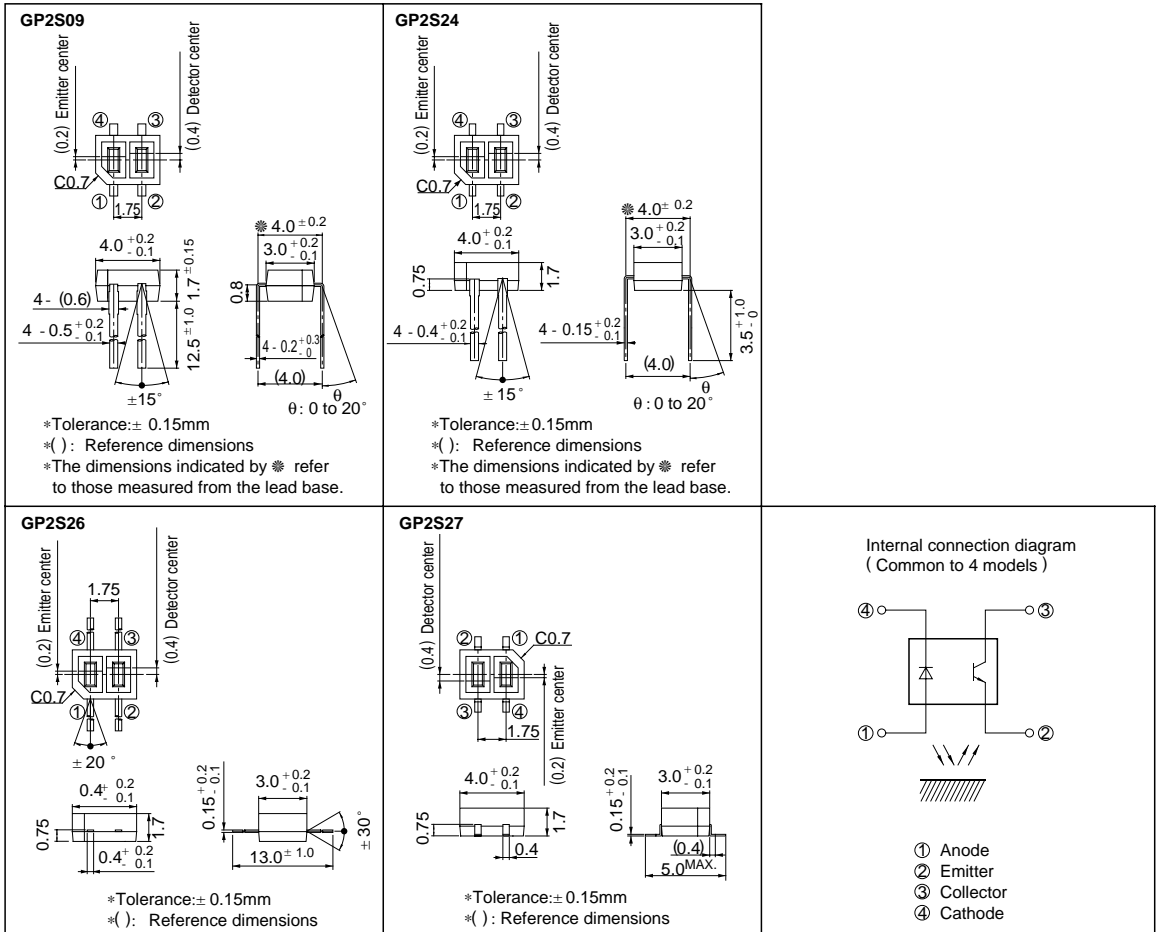

## Absolute Maximum Ratings

(Ta = 25°C)


Parameter		Symbol	Rating	Unit
Input	Forward current	I <sub>F</sub>	50	mA
	Reverse voltage	V <sub>R</sub>	6	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	V <sub>CEO</sub>	35	V
	Emitter-collector voltage	V <sub>ECO</sub>	6	V
	Collector current	I <sub>C</sub>	20	mA
	Collector power dissipation	P <sub>C</sub>	75	mW
Total power dissipation		P <sub>tot</sub>	100	mW
Operating temperature		T <sub>opr</sub>	- 20 to + 85	°C
Storage temperature		T <sub>stg</sub>	- 40 to + 100	°C
*1 Soldering temperature		T <sub>sol</sub>	260	°C

\*1 Within 5 seconds (Soldering areas for each model are shown below )

### GP2S09, GP2S24

Soldering area:

The hatched area more than 1mm\*<sup>2</sup> away from the lower edge of package as shown in the figure below.




\*2 GP2S09: 4mm

### GP2S26

Soldering area:


The hatched area more than 2.0mm away from the both edges of package as shown in the figure below.



### GP2S27

Soldering area:

The hatched area more than 0.5mm away from the both edges of package as shown in the figure below.



## Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 20mA	-	1.2	1.4	V	
	Reverse current	I <sub>R</sub>	V <sub>R</sub> = 6V	-	-	10	μ A	
Output	Collector dark current	I <sub>CEO</sub>	V <sub>CE</sub> = 20V	-	10 <sup>-9</sup>	10 <sup>-7</sup>	A	
Transfer characteristics	*3 Collector current		I <sub>C</sub>	I <sub>F</sub> = 4mA, V <sub>CE</sub> = 2V	20	45	120	μ A
	Response time	Rise time	t <sub>r</sub>	V <sub>CE</sub> = 2V, I <sub>C</sub> = 100 μ A	-	20	100	μ s
		Fall time	t <sub>f</sub>	R <sub>L</sub> = 1kΩ, d = 1mm	-	20	100	μ s
	*4 Leak current		I <sub>LEAK</sub>	I <sub>F</sub> = 4mA, V <sub>CE</sub> = 2V	-	-	0.1	μ A

\*3 The condition and arrangement of the reflective object are shown below.

\*4 Without reflective object


The ranking of collector current shall be classified into the following 6 ranks.

(GP2S09, GP2S24, GP2S26, GP2S27)


Rank	Collector-current I <sub>C</sub> (μ A)
*5A	20 to 42
B	34 to 71
C	58 to 120
A or B	20 to 71
B or C	34 to 120
A, B or C	20 to 120

\*5 GP2S24 and GP2S26 and GP2S27 don't have A rank.


Test Condition and Arrangement for Collector Current

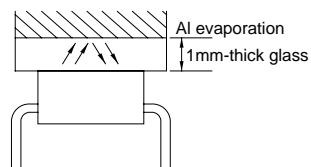


**Fig. 1 Forward Current vs. Ambient Temperature**

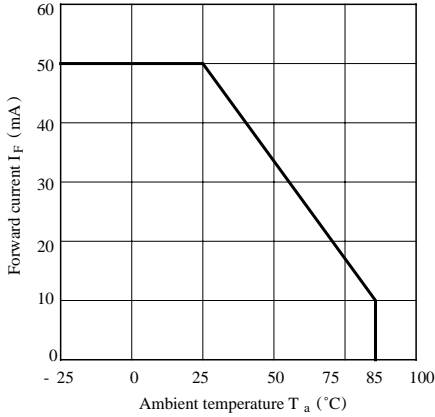


**Fig. 2 Power Dissipation vs. Ambient Temperature**

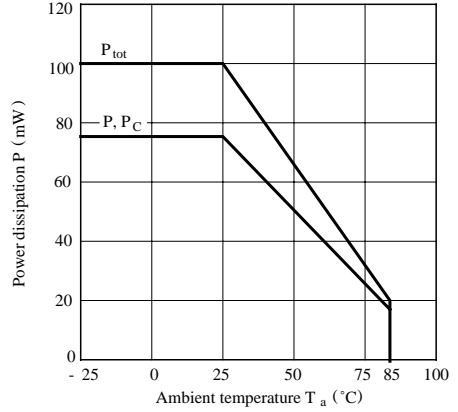


**Fig. 3 Forward Current vs. Forward Voltage**

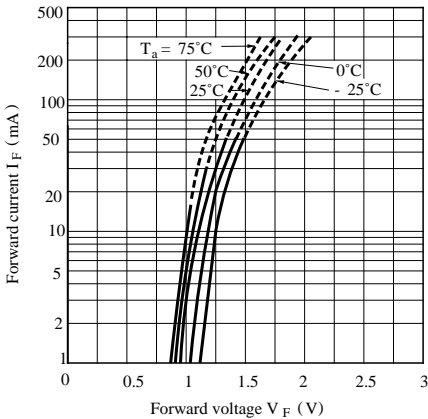


**Fig. 4 Collector Current vs. Forward Current**

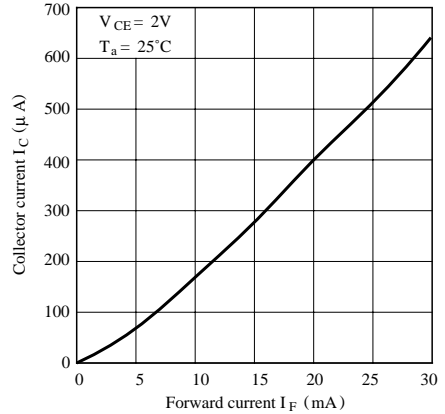


**Fig. 5 Collector Current vs. Collector-Emitter Voltage**

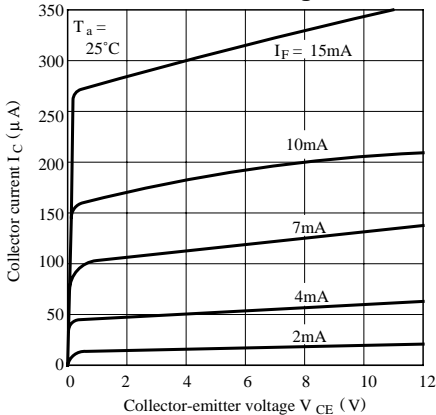


**Fig. 6 Relative Collector Current vs. Ambient Temperature**

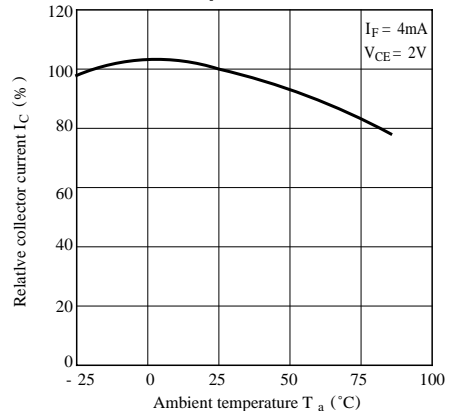


**Fig. 7 Collector Dark Current vs. Ambient Temperature**

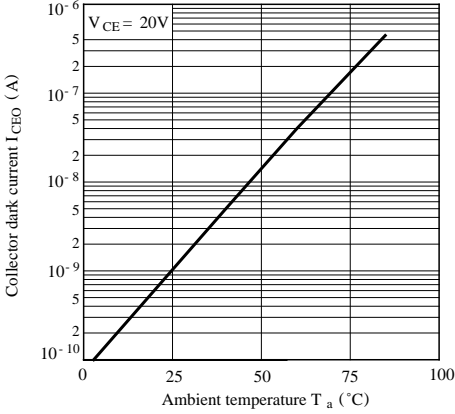


**Fig. 8 Response Time vs. Load Resistance (GP2S09)**

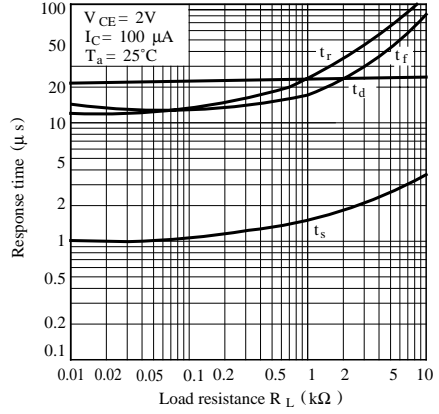


**Fig. 9 Response Time vs. Load Resistance (GP2S24/ GP2S26/GP2S27)**

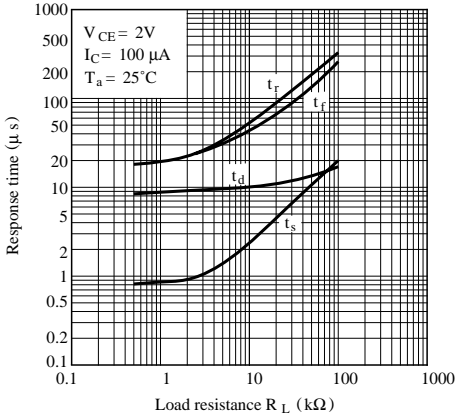


**Test Circuit for Response Time**

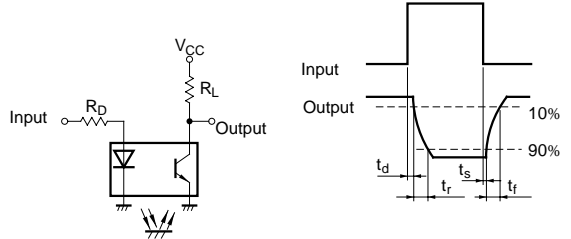


**Fig.10 Relative Collector Current vs. Distance between Sensor and Al Evaporation Glass**

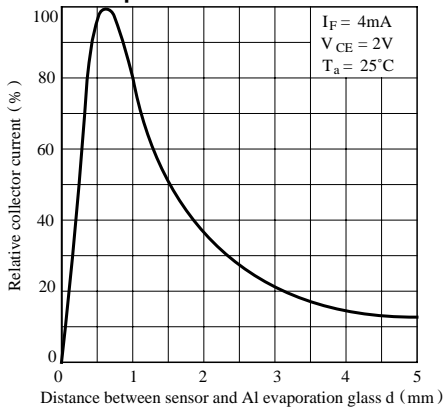


**Fig.11 Relative Collector Current vs. Card Moving Distance (1)**

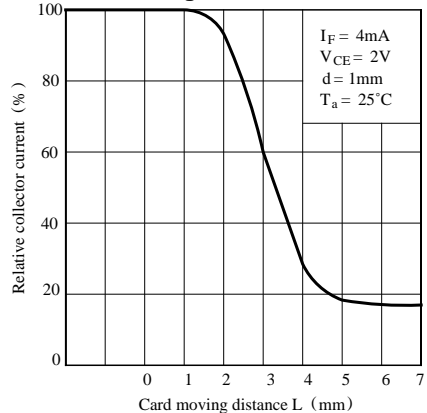


**Fig.12 Relative Collector Current vs. Card Moving Distance (2)**

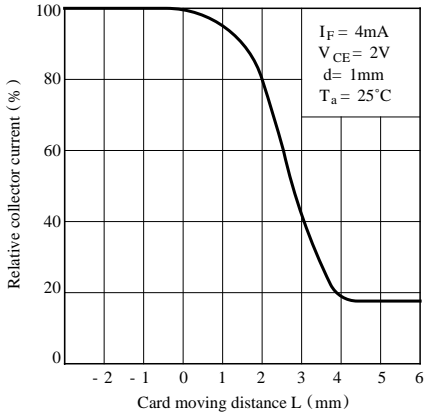


**Test Condition for Distance & Detecting Position Characteristics (EX : GP2S24)**

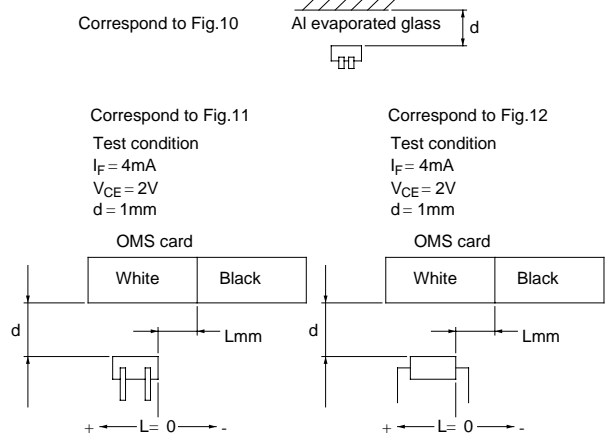


**Fig.13-a Frequency Response (GP2S09)**

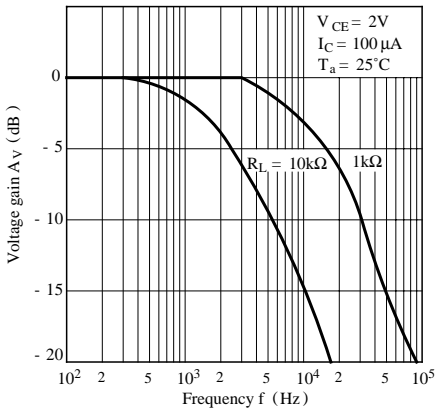

**Fig.13-b Frequency Response (GP2S24/ GP2S26/ GP2S27)**

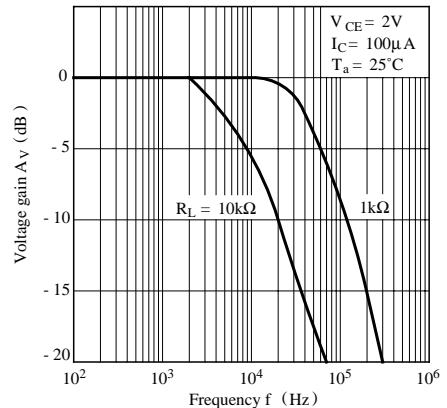

**Fig.14 Spectral Sensitivity (Detecting Side)**

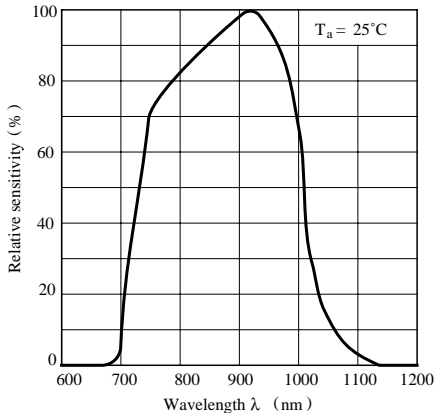

- Please refer to the chapter “Precautions for Use”.

**NOTICE**

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
  - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
    - Personal computers
    - Office automation equipment
    - Telecommunication equipment [terminal]
    - Test and measurement equipment
    - Industrial control
    - Audio visual equipment
    - Consumer electronics
  - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
    - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
    - Traffic signals
    - Gas leakage sensor breakers
    - Alarm equipment
    - Various safety devices, etc.
  - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
    - Space applications
    - Telecommunication equipment [trunk lines]
    - Nuclear power control equipment
    - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.