

# BR3JB25L0 Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	BR3JB25L0-DG
Manufacturer	<a href="#">Stackpole Electronics Inc</a>
Manufacturer Product Number	BR3JB25L0
Description	RES 0.025 OHM 5% 3W RADIAL
Detailed Description	25 mOhms $\pm$ 5% 3W Through Hole Resistor Radial Current Sense, Flame Proof, Non-Inductive, Pulse Withstanding, Safety Metal Foil

This model BR3JB25L0 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

BR3JB25L0

Series:

BR

Resistance:

25 mOhms

Power (Watts):

3W

Features:

Current Sense, Flame Proof, Non-Inductive, Pulse Withstanding, Safety

Operating Temperature:

-65°C ~ 350°C

Supplier Device Package:

-

Height - Seated (Max):

1.000" (25.40mm)

Failure Rate:

-

Manufacturer:

Stackpole Electronics Inc

Product Status:

Active

Tolerance:

±5%

Composition:

Metal Foil

Temperature Coefficient:

±20ppm/°C

Package / Case:

Radial

Size / Dimension:

0.602" L x 0.065" W (15.30mm x 1.65mm)

Number of Terminations:

2

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8533.21.0090

Moisture Sensitivity Level (MSL):

Not Applicable

ECCN:

EAR99

# BR Series

## Bare Element Current Sensing Resistor

Stackpole Electronics, Inc.  
Resistive Product Solutions

### Features:

- 1, 3, and 5 watts
- $\pm 1\%$ ,  $\pm 2\%$ , or  $\pm 5\%$  tolerance
- $\pm 20$  ppm/ $^{\circ}\text{C}$  element wire
- $\pm 200$  ppm/ $^{\circ}\text{C}$  at lead stops
- All welded construction
- Flameproof
- Non-inductive (10 nH max)
- High current handling to 31 amps
- RoHS compliant, REACH compliant, lead free, and halogen free



### Electrical Specifications


Type/Code	Power Rating (W) at 85 $^{\circ}\text{C}$	Ohmic Range ( $\Omega$ ) and Tolerance <sup>(1)</sup>
		1%, 2%, 5%
BR1	1	0.005 - 0.1
BR3	3	0.005 - 0.1
BR5	5	0.005 - 0.05

(1) Contact Stackpole for resistance values below 0.005 $\Omega$ .

Product photo shown above is typical. Actual components may vary depending on element wire size and amount of trim adjusting required to meet desired resistance value.

Please refer to the High Power Resistor Application Note for more information on designing and implementing high power resistor types.

### Mechanical Specifications

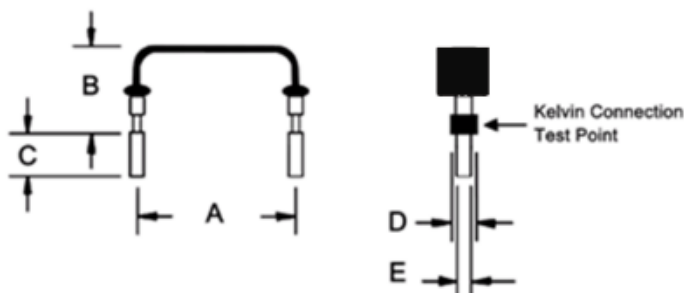

Element width varies depending on resistance value.

Type/Code	A	B	C	D	E	Unit
BR1	0.450 $\pm$ 0.040	0.200 $\pm$ 0.100	0.125 $\pm$ 0.030	0.065 $\pm$ 0.010	0.04 $\pm$ 0.002	inches
	11.43 $\pm$ 1.02	5.08 $\pm$ 2.54	3.18 $\pm$ 0.76	1.65 $\pm$ 0.25	1.02 $\pm$ 0.05	mm
BR3	0.602 $\pm$ 0.040	0.800 $\pm$ 0.200	0.125 $\pm$ 0.030	0.065 $\pm$ 0.010	0.04 $\pm$ 0.002	inches
	15.30 $\pm$ 1.02	20.32 $\pm$ 5.08	3.18 $\pm$ 0.76	1.65 $\pm$ 0.25	1.02 $\pm$ 0.05	mm
BR5	0.800 $\pm$ 0.040	0.800 $\pm$ 0.200	0.125 $\pm$ 0.030	0.065 $\pm$ 0.010	0.04 $\pm$ 0.002	inches
	20.32 $\pm$ 1.02	20.32 $\pm$ 5.08	3.18 $\pm$ 0.76	1.65 $\pm$ 0.25	1.02 $\pm$ 0.05	mm

# BR Series

## Bare Element Current Sensing Resistor


Stackpole Electronics, Inc.  
Resistive Product Solutions

### Performance Characteristics

Test	Test Specification
Moisture Resistance	± 1%
Load Life @ 25°C - 1000 hours	± 2%, + 0.0005Ω
Temperature Cycle @ -40°C & +125°C (1000 cycles)	± 1%

Operating temperature range is -65 to +350°C

### Power Derating Curve:

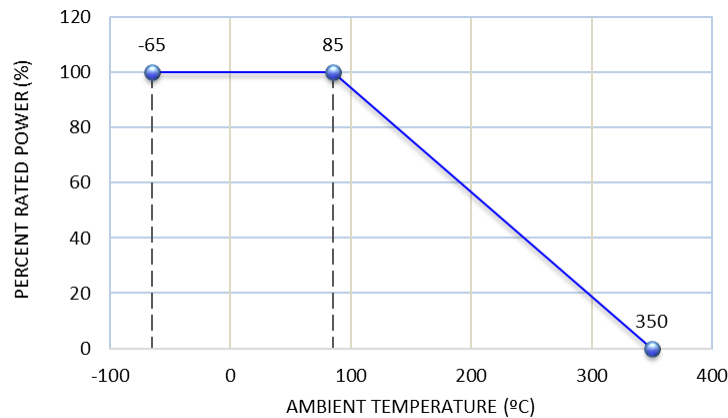

Note: Maximum recommended solder joint/lead stop temperature is +105°C

### Recommended Solder Profile

This information is intended as a reference for solder profiles for Stackpole resistive components. These profiles should be compatible with most soldering processes. These are only recommendations. Actual numbers will depend on board density, geometry, packages used, etc., especially those cells labeled with “\*\*”.

### 100% Matte Tin / RoHS Compliant Terminations

Soldering iron recommended temperatures is 330 to 350°C with minimum duration.  
Maximum number of reflow cycles is 3.

### Wave Soldering

Description	Maximum	Recommended	Minimum
Preheat Time	80 seconds	70 seconds	60 seconds
Temperature Diff.	140°C	120°C	100°C
Solder Temp.	260°C	250°C	240°C
Dwell Time at Max.	10 seconds	5 seconds	*
Ramp DN (°C/sec)	N/A	N/A	N/A

Temperature Diff. = Difference between final preheat stage and soldering stage.

### Convection IR Reflow


Description	Maximum	Recommended	Minimum
Ramp Up (°C/sec)	3°C/sec	2°C/sec	*
Dwell Time > 217°C	150 seconds	90 seconds	60 seconds
Solder Temp.	260°C	245°C	*
Dwell Time at Max.	30 seconds	15 seconds	10 seconds
Ramp DN (°C/sec)	6°C/sec	3°C/sec	*

# BR Series

## Bare Element Current Sensing Resistor

Stackpole Electronics, Inc.  
Resistive Product Solutions

### Recommended Lead Free Resistor Reflow Profile

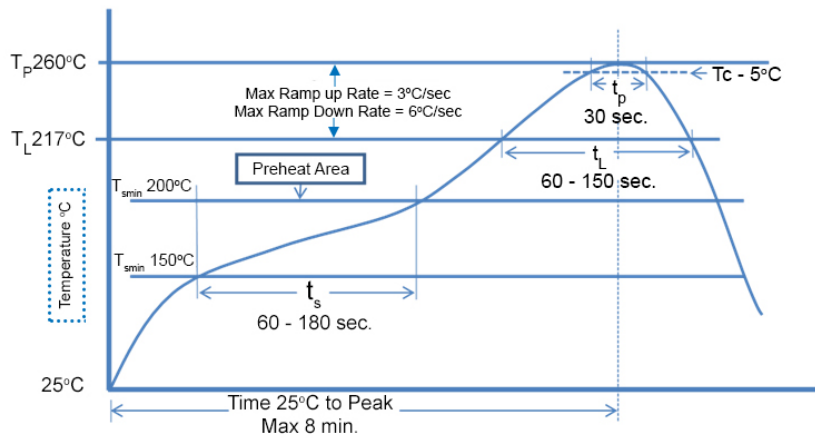


### High Power Chip Resistors and Thermal Management

Stackpole has developed several surface mount resistor series in addition to our current sense resistors, which have had higher power ratings than standard resistor chips. This has caused some uncertainty and even confusion by users as to how to reliably use these resistors at the higher power ratings in their designs.

The data sheets for the RHC, RMCP, RNCP, CSR, CSRN, CSRF, CSS, and CSSH state that the rated power assumes an ambient temperature of no more than 100°C for the CSS / CSSH series and 70°C for all other high power resistor series. In addition, IPC and UL best practices dictate that the combined temperature on any resistor due to power dissipated and ambient air shall be no more than 105°C. At first glance this wouldn't seem too difficult, however the graph below shows typical heat rise for the CSR ½ 100 milliohm at full rated power. The heat rise for the RMCP and RNCP would be similar. The RHC with its unique materials, design, and processes would have less heat rise and therefore would be easier to implement for any given customer.

CSR1206 100mΩ Surface Temperature Rise

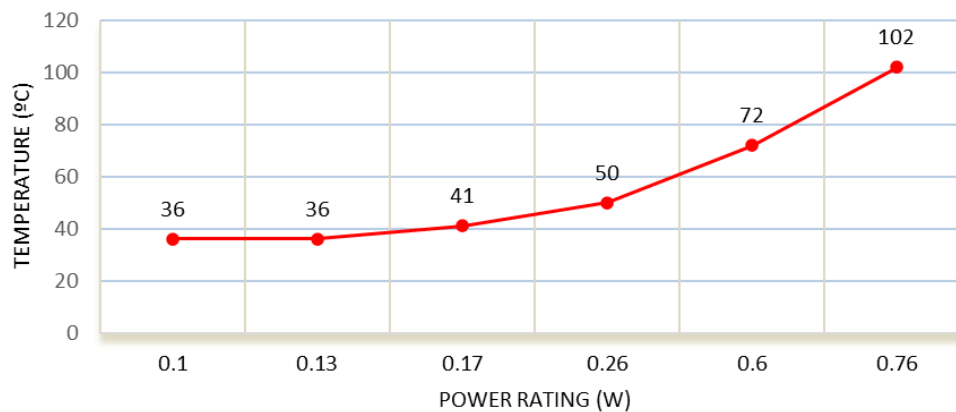

The 102°C heat rise shown here would indicate there will be additional thermal reduction techniques needed to keep this part under 105°C total hot spot temperature if this part is to be used at 0.75 watts of power. However, this same part at the usual power rating for this size would have a heat rise of around 72°C. This additional heat rise may be dealt with using wider conductor traces, larger solder pads and land patterns under the solder mask, heavier copper in the conductors, via through PCB, air movement, and heat sinks, among many other techniques. Because of the variety of methods customers can use to lower the effective heat rise of the circuit, resistor manufacturers simply specify power ratings with the limitations on ambient air temperature and total hot spot temperatures and leave the details of how to best accomplish this to the design engineers. Design guidelines for products in various market segments can vary widely so it would be unnecessarily constraining for a resistor manufacturer to recommend the use of any of these methods over another.

Note: The final resistance value can be affected by the board layout and assembly process, especially the size of the mounting pads and the amount of solder used. This is especially notable for resistance values  $\leq 50\text{m}\Omega$ . This should be taken into account when designing.

# BR Series

## Bare Element Current Sensing Resistor

Stackpole Electronics, Inc.  
Resistive Product Solutions

### RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status						
Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
BR	Open Air Bare Element Current Sense Resistor	Special	YES	100% Matte Sn	Jan-06	06/01

### "Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.


### Compliance to "REACH"

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, "The Registration, Evaluation, Authorization and Restriction of Chemicals", otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

### Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

### How to Order

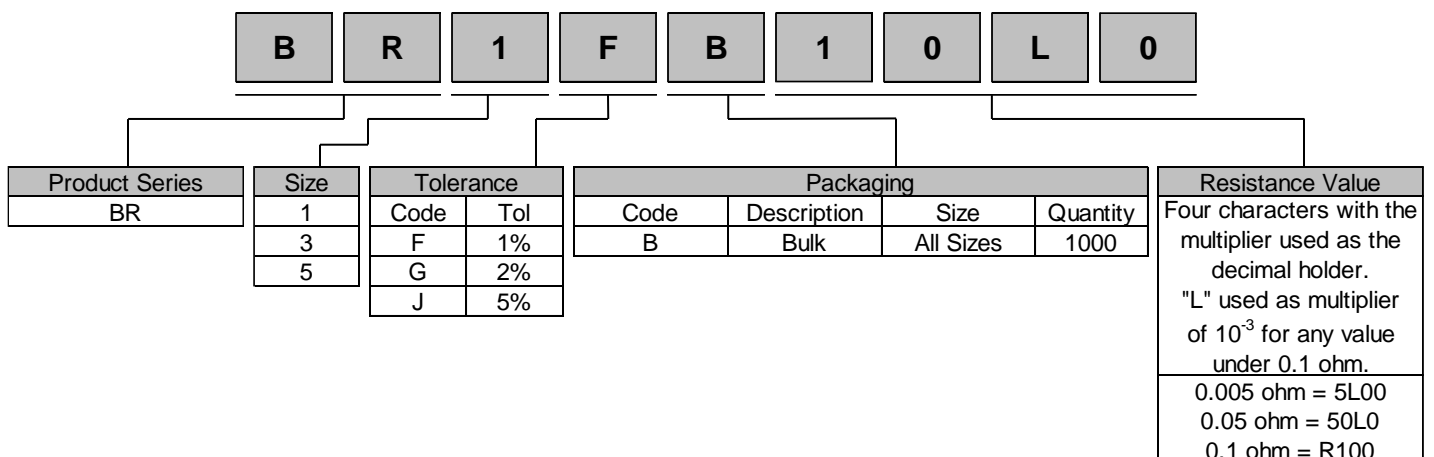

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.