

# CF12JB1R20 Datasheet

www.digi-electronics.com



https://www.DiGi-Electronics.com

|                              |   |
|------------------------------|---|
| DiGi Electronics Part Number | CF12JB1R20-DG   |
| Manufacturer                 | <a href="#">Stackpole Electronics Inc</a>   |
| Manufacturer Product Number  | CF12JB1R20  |
| Description                  | RES 1.2 OHM 5% 1/2W AXIAL   |
| Detailed Description         | 1.2 Ohms ±5% 0.5W, 1/2W Through Hole Resistor Axial Flame Retardant Coating, Safety Carbon Film |

This model CF12JB1R20 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

CF12JB1R20

Series:

CF

Resistance:

1.2 Ohms

Power (Watts):

0.5W, 1/2W

Features:

Flame Retardant Coating, Safety

Operating Temperature:

-55°C ~ 155°C

Supplier Device Package:

Axial

Height - Seated (Max):

-

Failure Rate:

-

Manufacturer:

Stackpole Electronics Inc

Product Status:

Active

Tolerance:

±5%

Composition:

Carbon Film

Temperature Coefficient:

±400ppm/°C

Package / Case:

Axial

Size / Dimension:

0.335" L x 0.122" W (8.50mm x 3.10mm)

Number of Terminations:

2

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8533.10.0065

Moisture Sensitivity Level (MSL):

Not Applicable

ECCN:

EAR99

# CF / CFM Series

## Carbon Film Resistor

Stackpole Electronics, Inc.  
Resistive Product Solutions

### Features:

- General purpose resistor ideal for commercial/industrial applications
- Flame retardant coatings standard
- Flameproof version available as CFF and CFFM
- Panasert available on selected sizes - contact Stackpole
- Auto sequencing/insertion compatible
- CFM (mini) ideal choice when size constraints apply
- Cut and formed product is available on select sizes - contact Stackpole
- Standard lead wire for CF and CFM is copper plated steel, with 100% tin over plate
- 100% tin plate on copper wire is available as type CFQ and CFQM
- RoHS compliant, REACH compliant, lead free and halogen free



### Electrical Specifications – CF, CFQ, PCF

| Type/Code    | Size | Power Rating (W)<br>@ 70°C | Maximum<br>Working<br>Voltage (V) <sup>(1)</sup> | Maximum<br>Overload<br>Voltage (V) | Dielectric<br>Withstanding<br>Voltage (V) | TCR (ppm/°C) per Ohmic Range   | Ohmic Range (Ω) and<br>Tolerance |         |
|--------------|------|----------------------------|--|------------------------------------|---|--|----------------------------------|---------|
|              |      |                            |  |                                    |   |  | 2%                               | 5%      |
| CF, CFQ      | 18   | 0.125                      | 250  | 500                                | 350                                       | $< 10\Omega = \pm 400 \text{ ppm/}^\circ\text{C}$<br>$10\Omega \text{ to } 9.99\text{K}\Omega = 0 \sim -400 \text{ ppm/}^\circ\text{C}$<br>$10\text{K}\Omega \text{ to } 99\text{K}\Omega = 0 \sim -500 \text{ ppm/}^\circ\text{C}$<br>$100\text{K}\Omega \text{ to } 999\text{K}\Omega = 0 \sim -850 \text{ ppm/}^\circ\text{C}$<br>$1\text{M}\Omega \text{ and above} = 0 \sim -1500 \text{ ppm/}^\circ\text{C}$ | 10 - 1M                          | 1 - 22M |
| CF, CFQ, PCF | 14   | 0.25                       | 350  | 600                                | 350                                       |  | 1 - 1M                           | 1 - 22M |
| CF, CFQ      | 12   | 0.5                        | 350  | 700                                | 600                                       |  | 10 - 1M                          | 1 - 22M |
| CF, CFQ      | 1    | 1                          | 500  | 1000                               | 600                                       |  | 1 - 1M                           | 1 - 10M |
| CF, CFQ      | 2    | 2                          | 500  | 1000                               | 600                                       |  | 1 - 1M                           | 1 - 10M |

(1) Lesser of  $\sqrt{P \cdot R}$  or maximum working voltage.

### Electrical Specifications – CFM, CFQM, PCFM

| Type/Code       | Size | Power Rating (W)<br>@ 70°C | Maximum<br>Working<br>Voltage (V) <sup>(1)</sup> | Maximum<br>Overload<br>Voltage (V) | Dielectric<br>Withstanding<br>Voltage (V) | TCR (ppm/°C) per Ohmic Range   | Ohmic Range (Ω) and<br>Tolerance |         |
|-----------------|------|----------------------------|--|------------------------------------|---|--|----------------------------------|---------|
|                 |      |                            |  |                                    |   |  | 2%                               | 5%      |
| CFM, CFQM       | 14   | 0.25                       | 250  | 500                                | 350                                       | $< 10\Omega = \pm 400 \text{ ppm/}^\circ\text{C}$<br>$10\Omega \text{ to } 9.99\text{K}\Omega = 0 \sim -400 \text{ ppm/}^\circ\text{C}$<br>$10\text{K}\Omega \text{ to } 99\text{K}\Omega = 0 \sim -500 \text{ ppm/}^\circ\text{C}$<br>$100\text{K}\Omega \text{ to } 999\text{K}\Omega = 0 \sim -850 \text{ ppm/}^\circ\text{C}$<br>$1\text{M}\Omega \text{ and above} = 0 \sim -1500 \text{ ppm/}^\circ\text{C}$ | 1 - 1M                           | 1 - 10M |
| CFM, CFQM, PCFM | 12   | 0.5                        | 350  | 600                                | 350                                       |  | 1 - 1M                           | 1 - 10M |
| CFM, CFQM       | 1    | 1                          | 600  | 1000                               | 600                                       |  | 1 - 1M                           | 1 - 10M |
| CFM, CFQM       | 2    | 2                          | 600  | 1000                               | 600                                       |  | 1 - 1M                           | 1 - 10M |


(1) Lesser of  $\sqrt{P \cdot R}$  or maximum working voltage.

### Electrical Specifications – CFF/CFM

| Type/Code | Size | Power Rating (W)<br>@ 70°C | Maximum<br>Working<br>Voltage (V) <sup>(1)</sup> | Maximum<br>Overload<br>Voltage (V) | Dielectric<br>Withstanding<br>Voltage (V) | TCR (ppm/°C) per Ohmic Range   | Ohmic Range (Ω) and<br>Tolerance |  |
|-----------|------|----------------------------|--|------------------------------------|---|--|----------------------------------|--|
|           |      |                            |  |                                    |   |  | 2%, 5%                           |  |
| CFF       | 18   | 0.166                      | 200  | 400                                | 300                                       | $< 10\Omega = \pm 400 \text{ ppm/}^\circ\text{C}$<br>$10\Omega \text{ to } 9.99\text{K}\Omega = 0 \sim -400 \text{ ppm/}^\circ\text{C}$<br>$10\text{K}\Omega \text{ to } 99\text{K}\Omega = 0 \sim -500 \text{ ppm/}^\circ\text{C}$<br>$100\text{K}\Omega \text{ to } 999\text{K}\Omega = 0 \sim -850 \text{ ppm/}^\circ\text{C}$<br>$1\text{M}\Omega \text{ and above} = 0 \sim -1500 \text{ ppm/}^\circ\text{C}$ | 1 - 2.2M                         |  |
|           | 14   | 0.25                       | 300  | 600                                | 500                                       |  | 1 - 5.1M                         |  |
|           | 12   | 0.5                        | 350  | 700                                | 500                                       |  |                                  |  |
| CFFM      | 14   | 0.25                       | 250  | 500                                | 300                                       |  | 1 - 2.2M                         |  |
|           | 12   | 0.5                        | 300  | 600                                | 500                                       |  |                                  |  |

(1) Lesser of  $\sqrt{P \cdot R}$  or maximum working voltage.

## Mechanical Specifications

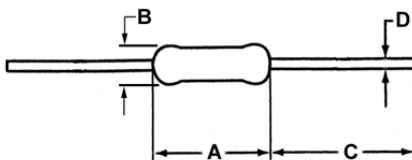


| Type/Code         | Size | A<br>Body Length | B<br>Body Diameter | C<br>Lead Length (ref.)       | D - Lead Diameter | Unit   |
|-------------------|------|------------------|--------------------|-------------------------------|-------------------|--------|
| CF                | 18   | 0.130 ± 0.012    | 0.067 ± 0.012      | 1.102 ± 0.118<br>28.00 ± 3.00 | 0.016 ± 0.003     | inches |
| CFQ               |      | 3.30 ± 0.30      | 1.70 ± 0.30        |                               | 0.40 ± 0.08       | mm     |
| CFF               | 18   | 0.126 ± 0.008    | 0.073 ± 0.008      |                               | 0.018 ± 0.002     | inches |
|                   |      | 3.20 ± 0.20      | 1.85 ± 0.20        |                               | 0.45 ± 0.05       | mm     |
| CF, CFF, CFQ, PCF | 14   | 0.236 ± 0.012    | 0.091 ± 0.012      |                               | 0.022 ± 0.003     | inches |
|                   |      | 6.00 ± 0.30      | 2.30 ± 0.30        |                               | 0.55 ± 0.08       | mm     |
| CFFM              |      | 0.126 ± 0.008    | 0.073 ± 0.008      |                               | 0.018 ± 0.002     | inches |
|                   |      | 3.20 ± 0.20      | 1.85 ± 0.20        |                               | 0.45 ± 0.05       | mm     |
| CFM               |      | 0.130 ± 0.012    | 0.067 ± 0.012      |                               | 0.016 ± 0.003     | inches |
| CFQM              |      | 3.30 ± 0.30      | 1.70 ± 0.30        |                               | 0.40 ± 0.08       | mm     |
| CF                | 12   | 0.335 ± 0.039    | 0.106 ± 0.020      |                               | 0.018 ± 0.003     | inches |
| CFF, CFQ          |      | 8.50 ± 1.00      | 2.70 ± 0.50        |                               | 0.45 ± 0.08       | mm     |
| CFM, CFQM, CFFM   |      | 0.236 ± 0.012    | 0.091 ± 0.012      | 0.022 ± 0.003                 | inches            |        |
|                   |      | 6.00 ± 0.30      | 2.30 ± 0.30        | 0.55 ± 0.08                   | mm                |        |
| CF, CFQ           | 1    | 0.433 ± 0.039    | 0.177 ± 0.020      | 1.181 ± 0.118                 | 0.031 ± 0.004     | inches |
|                   |      | 11.00 ± 1.00     | 4.50 ± 0.50        | 30.00 ± 3.00                  | 0.80 ± 0.10       | mm     |
| CFM, CFQM         | 1    | 0.354 ± 0.020    | 0.138 ± 0.020      | 1.102 ± 0.118                 | 0.028 ± 0.002     | inches |
|                   |      | 9.00 ± 0.50      | 3.50 ± 0.50        | 28.00 ± 3.00                  | 0.70 ± 0.05       | mm     |
| CF, CFQ           | 2    | 0.591 ± 0.039    | 0.197 ± 0.020      | 1.339 ± 0.157                 | 0.031 ± 0.004     | inches |
|                   |      | 15.00 ± 1.00     | 5.00 ± 0.50        | 34.00 ± 4.00                  | 0.80 ± 0.10       | mm     |

## Performance Characteristics

| Test                         | Test Method                     | Typical Result |               |            | Test Limit   |               |            |
|------------------------------|---------------------------------|----------------|---------------|------------|--|---------------|------------|
|                              |                                 | 1Ω ~ 91KΩ      | 100KΩ ~ 910KΩ | 1MΩ ~ 22MΩ | 1Ω ~ 91KΩ  | 100KΩ ~ 910KΩ | 1MΩ ~ 22MΩ |
| Current Noise                | MIL-STD 202, Method 308         | 0.15μ V/V      | 0.32μ V/V     | 0.54μ V/V  | 0.2μ V/V   | 0.4μ V/V      | 0.6μ V/V   |
| Short Time Overload          | JIS C5201-1, IEC60115-1, 4.13   | < ±0.25%       |               |            | ≤ ±(0.75% + 0.05Ω)                                       |               |            |
| Resistance to Soldering Heat | JIS C5201-1, IEC60115-1, 4.18   | < ±0.3%        |               |            | ≤ ±(0.5% + 0.05Ω)  |               |            |
| Rapid Change of Temperature  | JIS C5201-1, IEC60115-1, 4.19   | < ±0.3%        |               |            | ≤ ±(1% + 0.05Ω)  |               |            |
| Endurance at 70°C            | JIS C5201-1, IEC60115-1, 4.25.1 | < ±1%          |               |            | R < 100KΩ: ≤ ±(2% + 0.05Ω)<br>R ≥ 100KΩ: ≤ ±(3% + 0.05Ω) |               |            |
| Terminal Strength            | MIL-STD 202, Method 211         | < ±0.2%        |               |            | ≤ ±(0.5% + 0.05Ω)  |               |            |
| Damp Heat (Steady state)     | JIS C5201-1, IEC60115-1, 4.24   | < ±1.5%        |               |            | R < 100KΩ: ≤ ±(3% + 0.05Ω)<br>R ≥ 100KΩ: ≤ ±(5% + 0.05Ω) |               |            |

Operating temperature range is -55 to +155°C

**Power Derating Curve:**

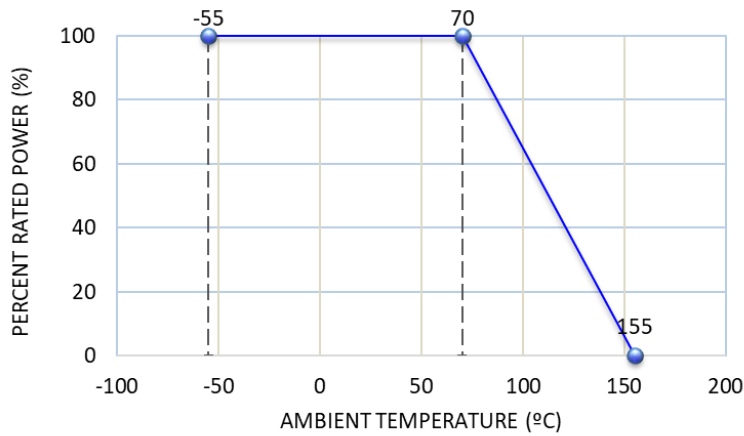


**Recommended Soldering Condition**

**Flow Soldering:**


- Pre-heating: 110°C MAX
- Peak temperature/duration: 260°C within 10 seconds (1<sup>st</sup>, 2<sup>nd</sup> wave total)
- Temperature profile (see chart on the right)

**Iron Soldering:**

- 380°C, 5 seconds, once/terminal

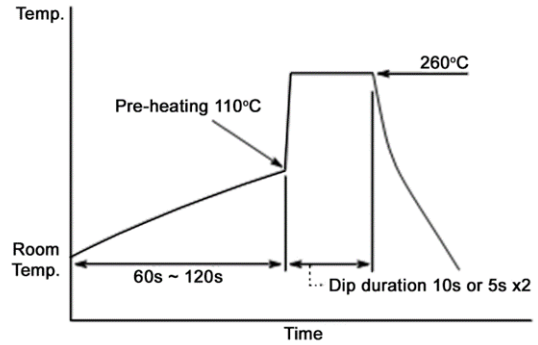

**Single Pulse Power**

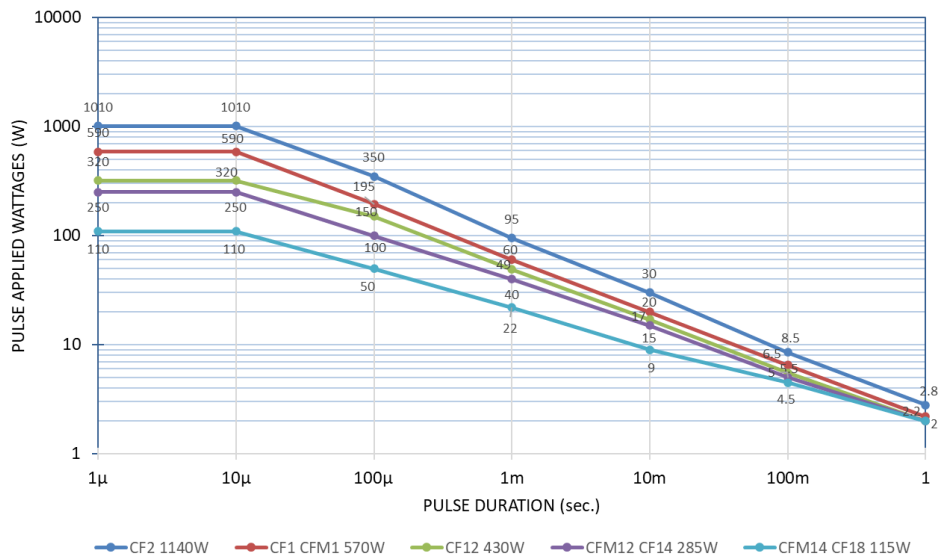

## Repetitive Pulse Information


If repetitive pulses are applied to resistors, pulse wave form must be less than "Pulse limiting voltage", "Pulse limiting current" or "Pulse limiting wattage" calculated by the formula below.

$$V_p = K\sqrt{P \times R \times T/t}$$

$$I_p = K\sqrt{P/R \times T/t}$$

$$P_p = K^2 \times P \times T/t$$

Where:  $V_p$ : Pulse limiting voltage (V)  
 $I_p$ : Pulse limiting current (A)  
 $P_p$ : Pulse limiting wattage (W)  
 $P$ : Power rating (W)  
 $R$ : Nominal resistance (ohm)  
 $T$ : Repetitive period (sec.)  
 $t$ : Pulse duration (sec.)  
 $K$ : Coefficient: 0.8  
 $[V_r$ : Rated Voltage (V),  $I_r$ : Rated Current (A)]

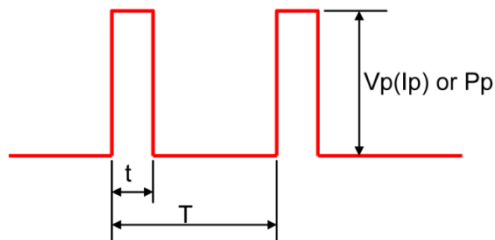

Note 1: If  $T > 10 \rightarrow T = 10$  (sec.),  $T/t > 1000 \rightarrow T/t = 1000$ .

Note 2: If  $T > 10$  and  $T/t > 1000$ , "Pulse Limiting power (single pulse) is applied.


Note 3: If  $V_p < V_r$  ( $I_p < I_r$  or  $P_p < P$ ),  $V_r$  ( $I_r$ ,  $P$ ) is  $V_p$  ( $I_p$ ,  $P_p$ ).

Note 4: Pulse limiting voltage (Current, Wattage) is applied at less than rated ambient temperature. If ambient temperature is more than the rated temperature (70°C), please decrease power rating according to "Power Derating Curve".

Note 5: Please assure sufficient margin for use period and conditions for "Pulse limiting voltage".


Note 6: If the pulse waveform is not square wave, please judge after transform the waveform into square wave according to the "Waveform Transformation to Square Wave".

## Current Noise

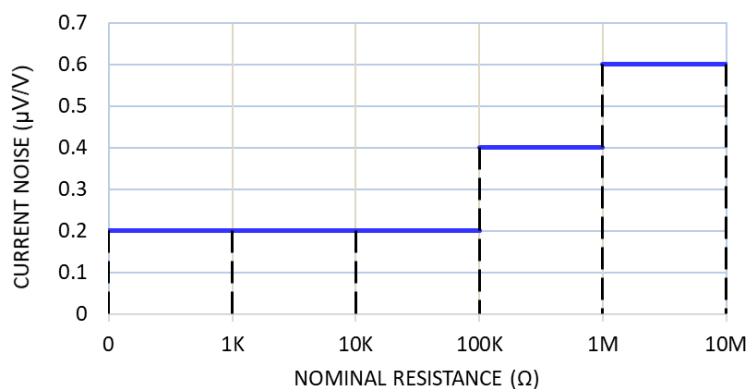


## Waveform Transformation to Square Wave


1. Discharge curve wave with time constant "t" → Square wave

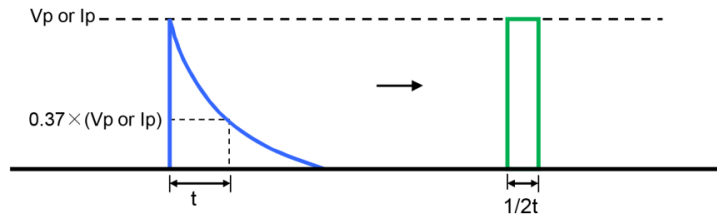


2. Damping oscillation wave with time constant of envelope "t" → Square wave

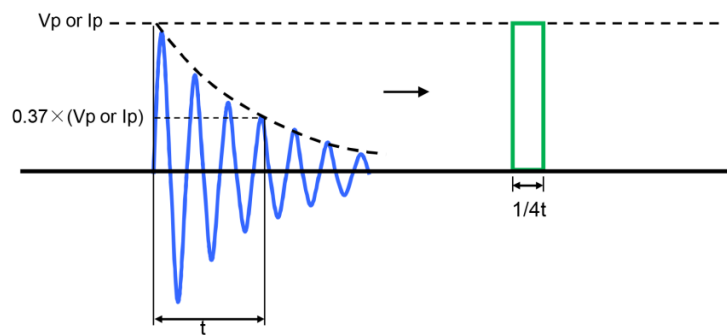


3. Half-wave rectification wave → Square wave

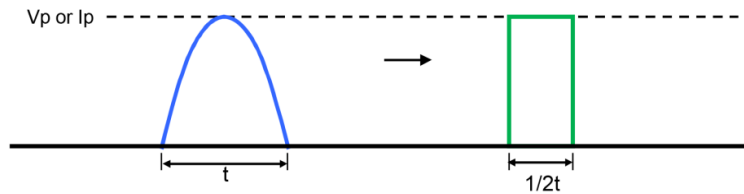

4. Triangular wave → Square wave

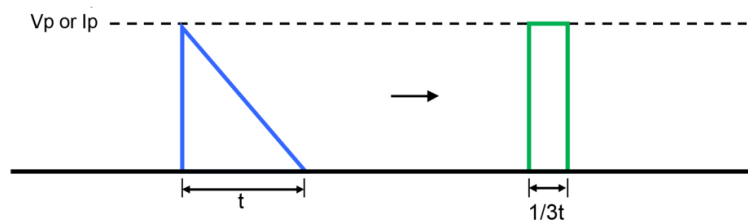

5. Special wave → Square wave

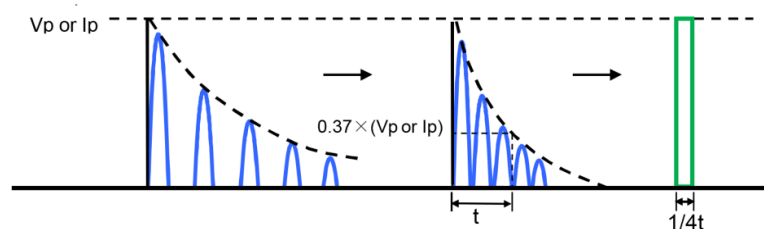


# CF / CFM Series

## Carbon Film Resistor

Stackpole Electronics, Inc.  
Resistive Product Solutions


### Reel Specifications

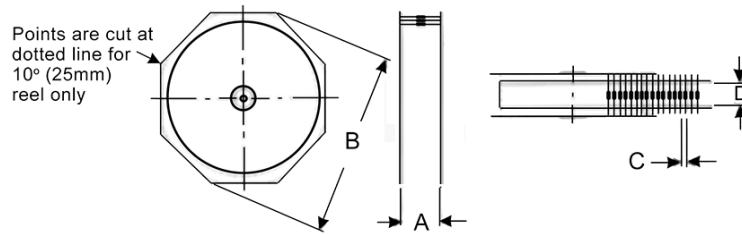

| Type/Code       | Size | Class | Tape          | A Max <sup>(1)</sup> | B Max            | C                            | D                             | Unit                          |
|-----------------|------|-------|---------------|----------------------|------------------|------------------------------|-------------------------------|-------------------------------|
| CF, CFQ         | 18   | I     | 0.250<br>6.35 | 2.508<br>63.70       | 13.504<br>343.00 | 0.197 ± 0.020<br>5.00 ± 0.50 | 2.063 ± 0.079<br>52.40 ± 2.00 | inches<br>mm                  |
| CFF             | 18   |       |               | 2.508<br>63.70       |                  |                              |                               | inches<br>mm                  |
| CF, CFQ, CFF    | 14   |       |               | 2.638<br>67.00       |                  |                              |                               | inches<br>mm                  |
|                 | 12   |       |               | 2.736<br>69.50       |                  |                              |                               | inches<br>mm                  |
| CF, CFQ         | 1    |       |               | 2.972<br>75.50       |                  |                              |                               | inches<br>mm                  |
|                 | 2    |       |               | 3.130<br>79.50       |                  |                              |                               | 0.394 ± 0.020<br>10.00 ± 0.50 |
| CFM, CFQM, CFFM | 14   |       |               | 2.508<br>63.70       |                  | inches<br>mm                 |                               |                               |
|                 | 12   |       |               | 2.638<br>67.00       |                  | 0.197 ± 0.020<br>5.00 ± 0.50 |                               | inches<br>mm                  |
| CFM, CFQM       | 1    |       |               | 2.736<br>69.50       |                  | inches<br>mm                 |                               |                               |


Packaging is per EIA-296.

### Ammo Packaging Specifications

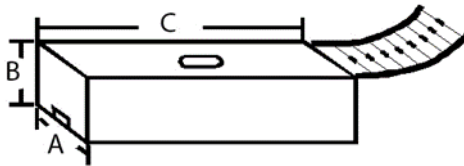

| Type/Code | Size | A                             | B                              | C                               | Unit         |
|-----------|------|-------------------------------|--------------------------------|---------------------------------|--------------|
| CF, CFQ   | 16   | 2.953 ± 0.079<br>75.00 ± 2.00 | 2.756 ± 0.118<br>70.00 ± 3.00  | 10.039 ± 0.197<br>255.00 ± 5.00 | inches<br>mm |
| CF, CFQ   | 14   |                               | 3.937 ± 0.118<br>100.00 ± 3.00 |                                 | inches<br>mm |
| CF, CFQ   | 12   |                               | 2.756 ± 0.118<br>70.00 ± 3.00  |                                 | inches<br>mm |
| CFQ       | 2    |                               | 3.543 ± 0.118<br>90.00 ± 3.00  |                                 | inches<br>mm |
| CFM, CFQM | 14   |                               | 2.756 ± 0.118<br>70.00 ± 3.00  |                                 | inches<br>mm |
| CFM, CFQM | 12   |                               | 3.937 ± 0.118<br>100.00 ± 3.00 |                                 | inches<br>mm |
| CFQ, CFQM | 1    |                               | 2.953 ± 0.118<br>75.00 ± 3.00  |                                 | inches<br>mm |
|           |      |                               | inches<br>mm                   |                                 |              |



## Radial Lead Taping Specifications (Pana-Sert PCF14)

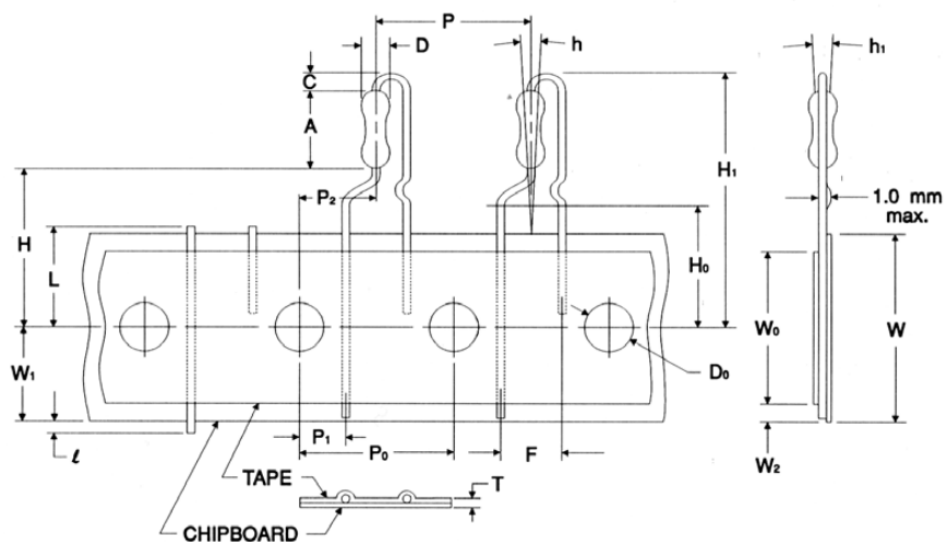


| Symbol         | Description                  | PANA-SERT                               | Unit         | Symbol         | Description                             | PANA-SERT                                    | Unit         |
|----------------|------------------------------|---|--------------|----------------|---|--|--------------|
| A              | Resistor body length         | 0.256 ± 0.020<br>6.50 ± 0.50            | inches<br>mm | L              | Cutout Length                           | 0.433 max.<br>11.00 max.                     | inches<br>mm |
| C              | Height of bending            | 0.098 ± 0.020<br>2.50 ± 0.50            | inches<br>mm | P              | Resistor pitch                          | 0.500 ± 0.039<br>12.70 ± 1.00                | inches<br>mm |
| D              | Resistor body diameter       | 0.091 ± 0.008<br>2.30 ± 0.20            | inches<br>mm | P <sub>0</sub> | Sprocket-hole pitch                     | 0.500 ± 0.012<br>12.70 ± 0.30                | inches<br>mm |
| D <sub>0</sub> | Sprocket-hole diameter       | 0.157 ± 0.012<br>4.00 ± 0.30            | inches<br>mm | P <sub>1</sub> | Sprocket-hole center to lead center     | 0.152 ± 0.028<br>3.85 ± 0.70                 | inches<br>mm |
| F              | Resistor lead spacing        | 0.197 ± 0.039<br>5.00 ± 1.00            | inches<br>mm | P <sub>2</sub> | Sprocket-hole center to resistor center | 0.250 ± 0.051<br>6.35 ± 1.30                 | inches<br>mm |
| H              | Height to bottom of resistor | 0.748 ± 0.039<br>19.00 ± 1.00           | inches<br>mm | T              | Thickness (chipboard and tape)          | 0.028 ± 0.008<br>0.70 ± 0.20                 | inches<br>mm |
| H <sub>0</sub> | Height to lead clinch        | 0.630 ± 0.020<br>16.00 ± 0.50           | inches<br>mm | W              | Chipboard width                         | 0.709 +0.039 / -0.020<br>18.00 +1.00 / -0.50 | inches<br>mm |
| H <sub>1</sub> | Height of resistor           | 1.122 max.<br>28.50 max.                | inches<br>mm | W <sub>0</sub> | Hold-down tape width                    | 0.49 min.<br>12.50 min.                      | inches<br>mm |
| h              | Resistor alignment           | 0 ± 0.079 (0 ± 5°)<br>0 ± 2.00 (0 ± 5°) | inches<br>mm | W <sub>1</sub> | Sprocket-hole position                  | 0.354 +0.030 / -0.020<br>9.00 +0.75 / -0.50  | inches<br>mm |
| h <sub>1</sub> | Resistor alignment           | 0 ± 0.079 (0 ± 5°)<br>0 ± 2.00 (0 ± 5°) | inches<br>mm | W <sub>2</sub> | Hold-down tape position                 | 0.118 max.<br>3.00 max.                      | inches<br>mm |
| l              | Lead protrusion              | 0.079 max.<br>2.00 max.                 | inches<br>mm |                |   |  |              |

**Surface Temperature Rise**

Measurement Point

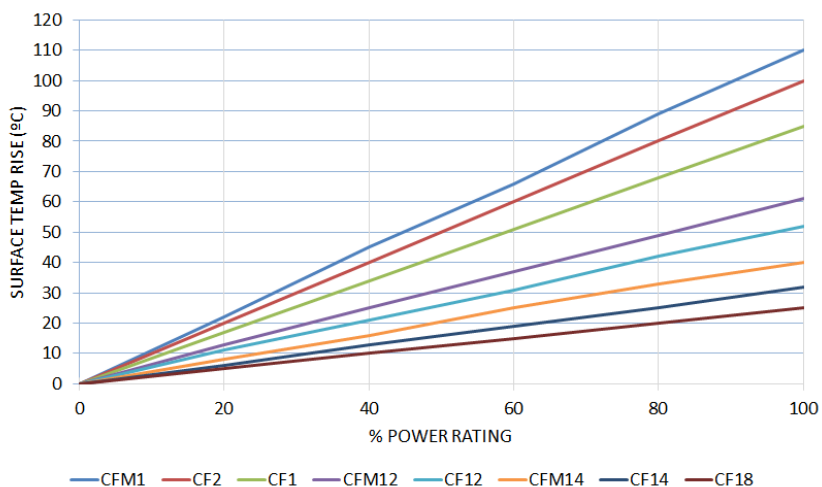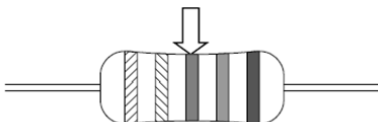

**Standard Color Codes**



**PRECISION** - Have three significant-figure bands, a multiplier band, and a tolerance band.  
Tolerances 1% or less.

**GENERAL PURPOSE** - Have two significant-figure bands, a multiplier band, and a tolerance band.  
Tolerances 2% or greater.

| Color  | Nominal | Multiplier | Tolerance (%) |
|--------|---------|------------|---------------|
| Black  | 0       | 1          | -             |
| Brown  | 1       | 10         | 1             |
| Red    | 2       | 100        | 2             |
| Orange | 3       | 1K         | -             |
| Yellow | 4       | 10K        | -             |
| Green  | 5       | 100K       | 0.5           |
| Blue   | 6       | 1000K      | 0.25          |
| Violet | 7       | -          | 0.1           |
| Gray   | 8       | -          | -             |
| White  | 9       | 0.001      | -             |
| Silver | -       | 0.01       | 10            |
| Gold   | -       | 0.1        | 5             |

**COLOR BAND DESCRIPTION**

| BAND     | PRECISION  | GENERAL PURPOSE |
|----------|------------|-----------------|
| 1st band | Nominal    | Nominal         |
| 2nd band | Nominal    | Nominal         |
| 3rd band | Nominal    | Multiplier      |
| 4th band | Multiplier | Tolerance       |
| 5th band | Tolerance  | -               |

## RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

| RoHS Compliance Status  |   |                            |                                |                                   |  |                                       |
|-------------------------|---|----------------------------|--------------------------------|-----------------------------------|--|---------------------------------------|
| Standard Product Series | Description   | Package / Termination Type | Standard Series RoHS Compliant | Lead-Free Termination Composition | Lead-Free Mfg. Effective Date (Std Product Series) | Lead-Free Effective Date Code (YY/WW) |
| CF                      | Carbon Film Leaded Resistor                                 | Axial                      | YES                            | 100% Matte Sn                     | Jan-04 (Taiwan, China)                             | 04/01                                 |
| CFM                     | Carbon Film Resistor (Mini)                                 | Axial                      | YES                            | 100% Matte Sn                     | Jan-04 (Taiwan, China)                             | 04/01                                 |
| CFF                     | Carbon Film Resistor (Flameproof)                           | Axial                      | YES                            | 100% Matte Sn                     | Jan-04 (Taiwan, China)                             | 04/01                                 |
| CFFM                    | Carbon Film Resistor (Flameproof - mini)                    | Axial                      | YES                            | 100% Matte Sn                     | Jan-04 (Taiwan, China)                             | 04/01                                 |
| PCF                     | Carbon Film Resistor (Panaset CF14)                         | Axial                      | YES                            | 100% Matte Sn                     | Jan-04 (Taiwan, China)                             | 04/01                                 |
| PCFM                    | Carbon Film Resistor (Panaset CFM12)                        | Axial                      | YES                            | 100% Matte Sn                     | Jan-04 (Taiwan, China)                             | 04/01                                 |
| CFQ                     | Carbon Film Resistor (Tin Plating on Copper Wire)           | Axial                      | YES                            | 100% Matte Sn                     | Jan-04 (Taiwan, China)                             | 04/01                                 |
| CFQM                    | Carbon Film Resistor (Tin Plating Mini on Copper Wire)      | Axial                      | YES                            | 100% Matte Sn                     | Jan-04 (Taiwan, China)                             | 04/01                                 |
| PCFQ                    | Carbon Film Resistor (Tin Plating on Copper Wire - Panaset) | Axial                      | YES                            | 100% Matte Sn                     | Jan-04 (Taiwan, China)                             | 04/01                                 |

## "Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

## Compliance to "REACH"

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, "The Registration, Evaluation, Authorization and Restriction of Chemicals", otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

## Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

# CF / CFM Series

Carbon Film Resistor

## How to Order



| Product Series |                                     |
|----------------|-------------------------------------|
| Code           | Description                         |
| CF             | Standard                            |
| CFM            | Mini                                |
| CFF            | Flameproof                          |
| CFFM           | Flameproof (mini)                   |
| PCF            | Panasert CF14                       |
| PCFM           | Panasert CFM12                      |
| CFQ            | Tin plating on copper wire          |
| CFQM           | Tin plating (mini)                  |
| PCFQ           | Tin plating on copper wire Panasert |

| Power Rating |       |
|--------------|-------|
| Code         | W     |
| 18           | 0.125 |
| CFF18        | 0.166 |
| 14           | 0.25  |
| 12           | 0.5   |
| 1            | 1     |
| 2            | 2     |

| Tolerance |     |
|-----------|-----|
| Code      | Tol |
| G         | 2%  |
| J         | 5%  |

| Packaging |               |   |        |
|-----------|---------------|---|--------|
| Code      | Description   | Product Code  | Qty(*) |
| T         | Tape and Reel | CF18, CFQ18, CFF18<br>CF14, CFM14, CFF14, CFFM14<br>CFQ14, CFQM14 | 5000   |
|           |               | CF12, CFM12, CFF12, CFFM12<br>CFQ12, CFQM12                       | 2500   |
|           |               | CFM1, CFQM1, PCF14, PCFM12  | 2000   |
|           |               | CF1, CFQ1   | 1000   |
| A         | Ammo          | CF18, CFQ18, CFF18<br>CF14, CFF14, CFFM14, CFM14<br>CFQ14, CFQM14 | 5000   |
|           |               | CFM12, CFFM12, CFQM12<br>CF12, CFF12, CFQ12, PCFM12               | 2000   |
|           |               | CF1, CFM1, CFQ1, CFQM1<br>PCF14                                   | 1000   |
|           |               | CF2   | 1000   |

| Resistance Value  |
|---|
| Four characters with the multiplier used as the decimal holder. |
| 10 ohm = 10R0   |
| 10.2 Kohm = 10K2  |
| 1 Mohm = 1M00   |

(\*) Unpopular values may be subject to MOQ higher than SPQ.

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.