

# CSRF0603FT2L50 Datasheet



<https://www.DiGi-Electronics.com>

|                              |  |
|------------------------------|--|
| DiGi Electronics Part Number | CSRF0603FT2L50-DG  |
| Manufacturer                 | <a href="#">Stackpole Electronics Inc</a>  |
| Manufacturer Product Number  | CSRF0603FT2L50   |
| Description                  | RES 0.0025 OHM 1% 1/4W 0603  |
| Detailed Description         | 2.5 mOhms ±1% 0.25W, 1/4W Chip Resistor 0603 (1608 Metric) Automotive AEC-Q200, Current Sense, Moisture Resistant Metal Foil |

This model CSRF0603FT2L50 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

CSRF0603FT2L50

Series:

CSRF

Resistance:

2.5 MOhms

Power (Watts):

0.25W, 1/4W

Features:

Automotive AEC-Q200, Current Sense, Moisture Resistant

Operating Temperature:

-55°C ~ 170°C

Supplier Device Package:

0603

Size / Dimension:

0.063" L x 0.031" W (1.60mm x 0.80mm)

Number of Terminations:

2

Manufacturer:

Stackpole Electronics Inc

Product Status:

Active

Tolerance:

±1%

Composition:

Metal Foil

Temperature Coefficient:

±400ppm/°C

Package / Case:

0603 (1608 Metric)

Ratings:

AEC-Q200

Height - Seated (Max):

0.028" (0.70mm)

Failure Rate:

-

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8533.10.0042

Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

# CSRF Series

## Foil on Ceramic Current Sensing Chip Resistor

### Features:

- High power rating
- Wide resistance range
- Other resistance values may be available
- RoHS compliant, REACH compliant, lead free, and halogen free
- All sizes, except 0612, 0805-HP and 2010, are AEC-Q200 compliant




| Electrical Specifications - CSRF |                  |              |                               |    |
|----------------------------------|------------------|--------------|-------------------------------|----|
| Type/Code                        | Power Rating (W) | TCR (ppm/°C) | Ohmic Range (Ω) and Tolerance |    |
|                                  |                  |              | 1%                            | 5% |
| CSRF0402                         | 0.125            | ±300         | 0.003 - 0.007                 |    |
|                                  |                  | ±200         | 0.008 - 0.02                  |    |
| CSRF0402-HP                      | 0.25             | ±400         | 0.0025                        |    |
|                                  |                  | ±300         | 0.003 - 0.004                 |    |
|                                  |                  | ±200         | 0.005 - 0.007                 |    |
|                                  |                  | ±100         | 0.008 - 0.02                  |    |
| CSRF0603                         | 0.25             | ±100         | 0.002 - 0.004                 |    |
|                                  |                  | ±150         | 0.005 - 0.009                 |    |
|                                  |                  | ±75          | 0.01 - 0.03                   |    |
| CSRF0603-HP                      | 0.5              | ±100         | 0.002 - 0.009                 |    |
|                                  |                  | ±75          | 0.01 - 0.03                   |    |
| CSRF0805                         | 0.5              | ±100         | 0.003 - 0.01                  |    |
|                                  |                  | ±50          | 0.011 - 0.03                  |    |
| CSRF0805-HP                      | 1                | ±100         | 0.005 - 0.01                  |    |
|                                  |                  | ±50          | 0.011 - 0.03                  |    |
| CSRF0508                         | 1                | ±100         | 0.005 - 0.009                 |    |
|                                  |                  | ±50          | 0.01 - 0.062                  |    |
| CSRF1206                         | 1                | ±100         | 0.003 - 0.01                  |    |
|                                  |                  | ±50          | 0.011 - 0.05                  |    |
| CSRF0612                         | 1.5              | ±100         | 0.002 - 0.004                 |    |
|                                  |                  | ±75          | 0.005 - 0.03                  |    |
| CSRF2010 <sup>(1)</sup>          | 1                | ±200         | 0.002                         |    |
|                                  |                  | ±100         | 0.003 - 0.009                 |    |
|                                  |                  | ±50          | 0.01 - 0.1                    |    |
| CSRF2512                         | 2                | ±100         | 0.002 - 0.009                 |    |
|                                  |                  | ±50          | 0.01 - 0.56                   |    |
| CSRF1225                         | 3                | ±100         | 0.001 - 0.009                 | -  |
|                                  |                  | ±50          | 0.01 - 0.1                    | -  |

(1) For 2010 size, MOQ of 20 K pieces per value is required.


Please refer to the High-Power Resistor Application Note for more information on designing and implementing high power resistor types.

**Mechanical Specifications**



| Type/Code                                      | L<br>Body Length             | W<br>Body Width              | H<br>Body Height             | T<br>Bottom Termination      | Unit         |
|--|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| CSRF0402<br>0.003Ω - 0.007Ω                    | 0.039 ± 0.004<br>1.00 ± 0.10 | 0.022 ± 0.004<br>0.55 ± 0.10 | 0.018 ± 0.004<br>0.45 ± 0.10 | 0.014 ± 0.004<br>0.35 ± 0.10 | inches<br>mm |
| CSRF0402<br>0.008Ω - 0.02Ω                     | 0.039 ± 0.004<br>1.00 ± 0.10 | 0.022 ± 0.004<br>0.55 ± 0.10 | 0.018 ± 0.004<br>0.45 ± 0.10 | 0.010 ± 0.004<br>0.25 ± 0.10 | inches<br>mm |
| CSRF0402-HP<br>0.0025Ω                         | 0.039 ± 0.004<br>1.00 ± 0.10 | 0.022 ± 0.004<br>0.55 ± 0.10 | 0.018 ± 0.004<br>0.45 ± 0.10 | 0.018 ± 0.004<br>0.45 ± 0.10 | inches<br>mm |
| CSRF0402-HP<br>0.003Ω - 0.004Ω                 | 0.039 ± 0.004<br>1.00 ± 0.10 | 0.022 ± 0.004<br>0.55 ± 0.10 | 0.018 ± 0.004<br>0.45 ± 0.10 | 0.018 ± 0.004<br>0.45 ± 0.10 | inches<br>mm |
| CSRF0402-HP<br>0.005Ω - 0.007Ω                 | 0.039 ± 0.004<br>1.00 ± 0.10 | 0.022 ± 0.004<br>0.55 ± 0.10 | 0.018 ± 0.004<br>0.45 ± 0.10 | 0.014 ± 0.004<br>0.35 ± 0.10 | inches<br>mm |
| CSRF0402-HP<br>0.008Ω - 0.02Ω                  | 0.039 ± 0.004<br>1.00 ± 0.10 | 0.022 ± 0.004<br>0.55 ± 0.10 | 0.018 ± 0.004<br>0.45 ± 0.10 | 0.010 ± 0.004<br>0.25 ± 0.10 | inches<br>mm |
| CSRF0603 (standard and -HP)<br>0.002Ω - 0.004Ω | 0.063 ± 0.004<br>1.60 ± 0.10 | 0.031 ± 0.004<br>0.80 ± 0.10 | 0.022 ± 0.006<br>0.55 ± 0.15 | 0.022 ± 0.008<br>0.55 ± 0.20 | inches<br>mm |
| CSRF0603 (standard and -HP)<br>0.005Ω - 0.03Ω  | 0.063 ± 0.004<br>1.60 ± 0.10 | 0.031 ± 0.004<br>0.80 ± 0.10 | 0.022 ± 0.006<br>0.55 ± 0.15 | 0.012 ± 0.008<br>0.30 ± 0.20 | inches<br>mm |
| CSRF0805<br>CSRF0805-HP                        | 0.083 ± 0.008<br>2.10 ± 0.20 | 0.051 ± 0.006<br>1.30 ± 0.15 | 0.028 ± 0.006<br>0.70 ± 0.15 | 0.018 ± 0.008<br>0.45 ± 0.20 | inches<br>mm |
| CSRF1206                                       | 0.122 ± 0.008<br>3.10 ± 0.20 | 0.061 ± 0.008<br>1.55 ± 0.20 | 0.031 ± 0.006<br>0.80 ± 0.15 | 0.022 ± 0.008<br>0.55 ± 0.20 | inches<br>mm |
| CSRF2010<br>0.002Ω                             | 0.197 ± 0.008<br>5.00 ± 0.20 | 0.098 ± 0.008<br>2.50 ± 0.20 | 0.030 ± 0.008<br>0.75 ± 0.20 | 0.071 ± 0.012<br>1.80 ± 0.30 | inches<br>mm |
| CSRF2010<br>0.003Ω                             | 0.197 ± 0.008<br>5.00 ± 0.20 | 0.098 ± 0.008<br>2.50 ± 0.20 | 0.030 ± 0.008<br>0.75 ± 0.20 | 0.063 ± 0.012<br>1.60 ± 0.30 | inches<br>mm |
| CSRF2010<br>0.004Ω - 0.005Ω                    | 0.197 ± 0.008<br>5.00 ± 0.20 | 0.098 ± 0.008<br>2.50 ± 0.20 | 0.030 ± 0.008<br>0.75 ± 0.20 | 0.051 ± 0.012<br>1.30 ± 0.30 | inches<br>mm |
| CSRF2010<br>> 0.005Ω                           | 0.197 ± 0.008<br>5.00 ± 0.20 | 0.098 ± 0.008<br>2.50 ± 0.20 | 0.030 ± 0.008<br>0.75 ± 0.20 | 0.031 ± 0.012<br>0.80 ± 0.30 | inches<br>mm |
| CSRF2512                                       | 0.252 ± 0.012<br>6.40 ± 0.30 | 0.126 ± 0.012<br>3.20 ± 0.30 | 0.030 ± 0.012<br>0.75 ± 0.30 | 0.055 ± 0.022<br>1.40 ± 0.55 | inches<br>mm |

**Mechanical Specifications**



| Type/Code | L<br>Body Length             | W<br>Body Width              | H<br>Body Height             | T<br>Bottom Termination      | Unit         |
|-----------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| CSRF0508  | 0.047 ± 0.010<br>1.20 ± 0.25 | 0.079 ± 0.010<br>2.00 ± 0.25 | 0.026 ± 0.008<br>0.65 ± 0.20 | 0.017 ± 0.008<br>0.43 ± 0.20 | inches<br>mm |
| CSRF0612  | 0.063 ± 0.008<br>1.60 ± 0.20 | 0.126 ± 0.008<br>3.20 ± 0.20 | 0.024 ± 0.008<br>0.60 ± 0.20 | 0.012 ± 0.008<br>0.30 ± 0.20 | inches<br>mm |
| CSRF1225  | 0.126 ± 0.012<br>3.20 ± 0.30 | 0.252 ± 0.012<br>6.40 ± 0.30 | 0.026 ± 0.008<br>0.65 ± 0.20 | 0.024 ± 0.008<br>0.60 ± 0.20 | inches<br>mm |

| Performance Characteristics        |   |                           |         |  |
|------------------------------------|---|---------------------------|---------|--|
| Test                               | Test Method                                 | Test Specification        | Typical | Test Condition   |
| Load Life                          | MIL-STD-202F-Method 108A                    | ±1%<br>1225: ±2% + 0.5 mΩ | ≤ 0.5%  | RCWV at 70°C; 1.5 hours "ON"; 0.5 hour "OFF"<br>Total 1000 ±24 hours   |
| Resistance to Soldering Heat       | MIL-STD-202F-Method 210E                    | ±1%                       | ≤ 0.3%  | 260 ± 5°C for 10 ± 1 seconds   |
| Solderability                      | MIL-STD-202F-Method 208H                    | minimum 95% coverage      | > 95%   | 245 ± 5°C for 2 ± 0.5 seconds  |
| Thermal Shock                      | MIL-STD-202F-Method 107G                    | ±1%                       | ≤ 0.3%  | -55 to +150°C, 100 cycles  |
| Short Time Overload <sup>(*)</sup> | JIS-C-5202-5.5                              | ±1% + 0.5 mΩ              | ≤ 0.3%  | Sizes 0805-HP, 0508,1225, and 2512:<br>2.5 X rated power for 5 seconds<br>All other sizes: 5 X rated power for 5 seconds |
| High Temperature Exposure          | JIS-C-5201-1, Clause 4.23.2<br>IEC60068-2-2 | ±1%<br>1225: ±1% + 0.5 mΩ | ≤ 0.2%  | 125°C, 1000 hours<br>1225: 155°C, 1000 hours   |
| Moisture Resistance                | MIL-STD-202F-Method 106G                    | ±1%                       | ≤ 0.5%  |  |
| Insulation Resistance              | MIL-STD-202F-Method 302                     | 1 MΩ minimum              | ≥ 1 MΩ  | Apply 100 VDC for 1 minute   |

(\*) Sufficient copper size and weight required to maintain component temperature below 100°C  
 Recommended storage temperature: 5 ~ 35°C. humidity: 40 ~ 75%  
 Operating temperature range: 1225 and 2512 = -55 to +155°C; all other sizes = -55 to +170°C

**Power Derating Curve:**



**Taping Specifications - Paper Tape**




| Type/Code | A             | B             | E             | F             | W             | Unit   |
|-----------|---------------|---------------|---------------|---------------|---------------|--------|
| CSRF0402  | 0.028 ± 0.002 | 0.047 ± 0.002 | 0.069 ± 0.004 | 0.138 ± 0.002 | 0.315 ± 0.008 | Inches |
|           | 0.70 ± 0.05   | 1.20 ± 0.05   | 1.75 ± 0.10   | 3.50 ± 0.05   | 8.00 ± 0.20   | mm     |
| CSRF0603  | 0.043 ± 0.004 | 0.075 ± 0.004 | 0.069 ± 0.004 | 0.138 ± 0.002 | 0.315 ± 0.008 | Inches |
|           | 1.10 ± 0.10   | 1.90 ± 0.10   | 1.75 ± 0.10   | 3.50 ± 0.05   | 8.00 ± 0.20   | mm     |
| CSRF0805  | 0.063 ± 0.004 | 0.094 ± 0.004 | 0.069 ± 0.004 | 0.138 ± 0.002 | 0.315 ± 0.008 | Inches |
|           | 1.60 ± 0.10   | 2.40 ± 0.10   | 1.75 ± 0.10   | 3.50 ± 0.05   | 8.00 ± 0.20   | mm     |
| CSRF0508  | 0.066 ± 0.008 | 0.094 ± 0.008 | 0.069 ± 0.004 | 0.138 ± 0.004 | 0.315 ± 0.012 | Inches |
|           | 1.68 ± 0.20   | 2.38 ± 0.20   | 1.75 ± 0.10   | 3.50 ± 0.10   | 8.00 ± 0.30   | mm     |
| CSRF1206  | 0.079 ± 0.004 | 0.142 ± 0.004 | 0.069 ± 0.004 | 0.138 ± 0.002 | 0.315 ± 0.008 | Inches |
|           | 2.00 ± 0.10   | 3.60 ± 0.10   | 1.75 ± 0.10   | 3.50 ± 0.05   | 8.00 ± 0.20   | mm     |
| CSRF0612  | 0.079 ± 0.004 | 0.142 ± 0.004 | 0.069 ± 0.004 | 0.138 ± 0.002 | 0.315 ± 0.008 | Inches |
|           | 2.00 ± 0.10   | 3.60 ± 0.10   | 1.75 ± 0.10   | 3.50 ± 0.05   | 8.00 ± 0.20   | mm     |

**Taping Specifications - Paper Tape (cont.)**

| Type/Code | P0            | P1            | P2            | D0            | T             | Unit   |
|-----------|---------------|---------------|---------------|---------------|---------------|--------|
| CSRF0402  | 0.157 ± 0.004 | 0.079 ± 0.004 | 0.079 ± 0.002 | 0.061 ± 0.002 | 0.024 ± 0.004 | Inches |
|           | 4.00 ± 0.10   | 2.00 ± 0.10   | 2.00 ± 0.05   | 1.55 ± 0.05   | 0.60 ± 0.10   | mm     |
| CSRF0603  | 0.157 ± 0.004 | 0.157 ± 0.004 | 0.079 ± 0.002 | 0.061 ± 0.002 | 0.028 ± 0.004 | Inches |
|           | 4.00 ± 0.10   | 4.00 ± 0.10   | 2.00 ± 0.05   | 1.55 ± 0.05   | 0.70 ± 0.10   | mm     |
| CSRF0805  | 0.157 ± 0.004 | 0.157 ± 0.004 | 0.079 ± 0.002 | 0.061 ± 0.002 | 0.038 ± 0.004 | Inches |
|           | 4.00 ± 0.10   | 4.00 ± 0.10   | 2.00 ± 0.05   | 1.55 ± 0.05   | 0.97 ± 0.10   | mm     |
| CSRF0508  | 0.157 ± 0.004 | 0.157 ± 0.004 | 0.079 ± 0.004 | 0.059 ± 0.004 | 0.034 ± 0.008 | Inches |
|           | 4.00 ± 0.10   | 4.00 ± 0.10   | 2.00 ± 0.10   | 1.50 ± 0.10   | 0.87 ± 0.20   | mm     |
| CSRF1206  | 0.157 ± 0.004 | 0.157 ± 0.004 | 0.079 ± 0.002 | 0.061 ± 0.002 | 0.038 ± 0.004 | Inches |
|           | 4.00 ± 0.10   | 4.00 ± 0.10   | 2.00 ± 0.05   | 1.55 ± 0.05   | 0.97 ± 0.10   | mm     |
| CSRF0612  | 0.157 ± 0.004 | 0.157 ± 0.004 | 0.079 ± 0.002 | 0.061 ± 0.002 | 0.038 ± 0.004 | Inches |
|           | 4.00 ± 0.10   | 4.00 ± 0.10   | 2.00 ± 0.05   | 1.55 ± 0.05   | 0.97 ± 0.10   | mm     |

**Taping Specifications – Plastic Tape**

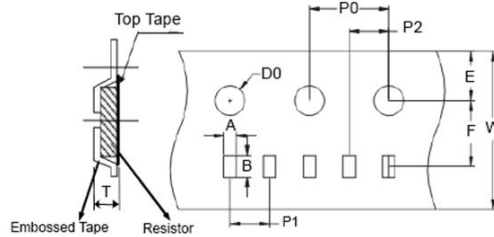

| Type/Code | A             | B             | E             | F             | W             | Unit   |
|-----------|---------------|---------------|---------------|---------------|---------------|--------|
| CSRF2010  | 0.110 ± 0.006 | 0.217 ± 0.006 | 0.069 ± 0.004 | 0.217 ± 0.002 | 0.472 ± 0.012 | Inches |
|           | 2.80 ± 0.15   | 5.50 ± 0.15   | 1.75 ± 0.10   | 5.50 ± 0.05   | 12.00 ± 0.30  | mm     |
| CSRF2512  | 0.134 ± 0.008 | 0.266 ± 0.008 | 0.069 ± 0.004 | 0.217 ± 0.004 | 0.472 ± 0.012 | Inches |
|           | 3.40 ± 0.20   | 6.75 ± 0.20   | 1.75 ± 0.10   | 5.50 ± 0.10   | 12.00 ± 0.30  | mm     |

| Type/Code | P0            | P1            | P2            | D0            | T             | Unit   |
|-----------|---------------|---------------|---------------|---------------|---------------|--------|
| CSRF2010  | 0.157 ± 0.004 | 0.157 ± 0.004 | 0.079 ± 0.002 | 0.059 ± 0.004 | 0.033 ± 0.008 | Inches |
|           | 4.00 ± 0.10   | 4.00 ± 0.10   | 2.00 ± 0.05   | 1.50 ± 0.10   | 0.84 ± 0.20   | mm     |
| CSRF2512  | 0.157 ± 0.004 | 0.157 ± 0.004 | 0.079 ± 0.004 | 0.059 ± 0.004 | 0.039 ± 0.008 | Inches |
|           | 4.00 ± 0.10   | 4.00 ± 0.10   | 2.00 ± 0.10   | 1.50 ± 0.10   | 1.00 ± 0.20   | mm     |

**Taping Specifications – Plastic Tape**



| Type/Code | W             | P             | E             | F             | D               | G             | Unit   |
|-----------|---------------|---------------|---------------|---------------|-----------------|---------------|--------|
| CSRF1225  | 0.472 ± 0.012 | 0.016 ± 0.004 | 0.069 ± 0.004 | 0.217 ± 0.004 | 0.059 +0.004/-0 | 0.157 ± 0.004 | Inches |
|           | 12.00 ± 0.30  | 0.40 ± 0.10   | 1.75 ± 0.10   | 5.50 ± 0.10   | 1.50 +0.1/-0    | 4.00 ± 0.10   | mm     |
|           | H             | A             | B             | T1            | T               | Unit          |        |
|           | 0.079 ± 0.004 | 0.134 ± 0.008 | 0.266 ± 0.008 | 0.039 ± 0.008 | 0.010 ± 0.004   | Inches        |        |
|           | 2.00 ± 0.10   | 3.40 ± 0.20   | 6.75 ± 0.20   | 1.00 ± 0.20   | 0.25 ± 0.10     | mm            |        |

**CSRF Series**  
Foil on Ceramic Current Sensing Chip Resistor

**Recommended Pad Layouts**



| Size        | Ohmic Range (Ω) | a             | b             | c             | Unit         |
|-------------|-----------------|---------------|---------------|---------------|--------------|
| CSRF0402    | 0.003 - 0.007   | 0.012<br>0.30 | 0.024<br>0.60 | 0.024<br>0.60 | inches<br>mm |
|             | 0.008 - 0.02    | 0.020<br>0.50 | 0.020<br>0.50 | 0.024<br>0.60 | inches<br>mm |
| CSRF0402-HP | All             | 0.008<br>0.20 | 0.031<br>0.80 | 0.024<br>0.60 | inches<br>mm |
| CSRF0603    | 0.002 - 0.004   | 0.014<br>0.35 | 0.043<br>1.10 | 0.039<br>1.00 | inches<br>mm |
|             | 0.005 - 0.009   | 0.024<br>0.60 | 0.035<br>0.90 | 0.039<br>1.00 | inches<br>mm |
|             | 0.01 - 0.03     | 0.035<br>0.90 | 0.028<br>0.70 | 0.039<br>1.00 | inches<br>mm |
| CSRF0603-HP | 0.005 - 0.009   | 0.024<br>0.60 | 0.035<br>0.90 | 0.039<br>1.00 | inches<br>mm |
| CSRF0603-HP | 0.01 - 0.03     | 0.035<br>0.90 | 0.028<br>0.70 | 0.039<br>1.00 | inches<br>mm |
| CSRF0805    | All             | 0.047<br>1.20 | 0.047<br>1.20 | 0.055<br>1.40 | inches<br>mm |
| CSRF0805-HP | All             | 0.047<br>1.20 | 0.047<br>1.20 | 0.055<br>1.40 | inches<br>mm |
| CSRF0508    | All             | 0.024<br>0.60 | 0.043<br>1.10 | 0.091<br>2.30 | inches<br>mm |
| CSRF1206    | All             | 0.087<br>2.20 | 0.051<br>1.30 | 0.071<br>1.80 | inches<br>mm |
| CSRF0612    | All             | 0.024<br>0.60 | 0.051<br>1.30 | 0.142<br>3.60 | inches<br>mm |
| CSRF2010    | 0.002           | 0.039<br>1.00 | 0.104<br>2.65 | 0.114<br>2.90 | inches<br>mm |
|             | 0.003 - 0.009   | 0.063<br>1.60 | 0.093<br>2.35 | 0.114<br>2.90 | inches<br>mm |
|             | 0.01 - 0.1      | 0.106<br>2.70 | 0.071<br>1.80 | 0.114<br>2.90 | inches<br>mm |
| CSRF2512    | 0.002 - 0.003   | 0.063<br>1.60 | 0.152<br>3.85 | 0.141<br>3.57 | inches<br>mm |
| CSRF2512    | 0.004 - 0.56    | 0.122<br>3.10 | 0.122<br>3.10 | 0.141<br>3.57 | inches<br>mm |
| CSRF1225    | 0.001 - 0.1     | 0.093<br>2.35 | 0.285<br>7.25 | 0.055<br>1.40 | inches<br>mm |

**Soldering Recommendations:**

- Peak reflow temperatures and durations:
  - IR Reflow Peak = 260°C max for 10 seconds
  - Wave Solder = 260°C max for 10 seconds
- Compatible with lead and lead-free solder reflow process
- Recommended IR Reflow Profile:



**High Power Chip Resistors and Thermal Management**

Stackpole has developed several surface mount resistor series in addition to our current sense resistors, which have had higher power ratings than standard resistor chips. This has caused some uncertainty and even confusion by users as to how to reliably use these resistors at the higher power ratings in their designs.

The data sheets for the RHC, RMCP, RNCP, CSR, CSRN, CSRF, CSS, and CSSH state that the rated power assumes an ambient temperature of no more than 100°C for the CSS / CSSH series and 70°C for all other high power resistor series. In addition, IPC and UL best practices dictate that the combined temperature on any resistor due to power dissipated and ambient air shall be no more than 105°C. At first glance this wouldn't seem too difficult, however the graph below shows typical heat rise for the CSR1206 100 milliohm at full rated power. The heat rise for the RMCP and RNCP would be similar. The RHC with its unique materials, design, and processes would have less heat rise and therefore would be easier to implement for any given customer.

CSR1206 100 mΩ Surface Temperature Rise



The 102°C heat rise shown here would indicate there will be additional thermal reduction techniques needed to keep this part under 105°C total hot spot temperature if this part is to be used at 0.75 watts of power. However, this same part at the usual power rating for this size would have a heat rise of around 72°C. This additional heat rise may be dealt with using wider conductor traces, larger solder pads and land patterns under the solder mask, heavier copper in the conductors, vias through PCB, air movement, and heat sinks, among many other techniques. Because of the variety of methods customers can use to lower the effective heat rise of the circuit, resistor manufacturers simply specify power ratings with the limitations on ambient air temperature and total hot spot temperatures and leave the details of how to best accomplish this to the design engineers. Design guidelines for products in various market segments can vary widely so it would be unnecessarily constraining for a resistor manufacturer to recommend the use of any of these methods over another.

Note: The final resistance value can be affected by the board layout and assembly process, especially the size of the mounting pads and the amount of solder used. This is especially notable for resistance values ≤ 50mΩ. This should be taken into account when designing.

# CSRF Series

## Foil on Ceramic Current Sensing Chip Resistor

### RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

| RoHS Compliance Status  |   |                            |                                |                                   |  |                                       |
|-------------------------|---|----------------------------|--------------------------------|-----------------------------------|--|---------------------------------------|
| Standard Product Series | Description   | Package / Termination Type | Standard Series RoHS Compliant | Lead-Free Termination Composition | Lead-Free Mfg. Effective Date (Std Product Series) | Lead-Free Effective Date Code (YY/WW) |
| CSRF                    | Foil on Ceramic Current Sensing Surface Mount Chip Resistor | SMD                        | YES                            | 100% Matte Sn over Ni             | Jul-04   | 04/27                                 |

### "Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.


### Compliance to "REACH"

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, "The Registration, Evaluation, Authorization and Restriction of Chemicals", otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

### Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

## How to Order

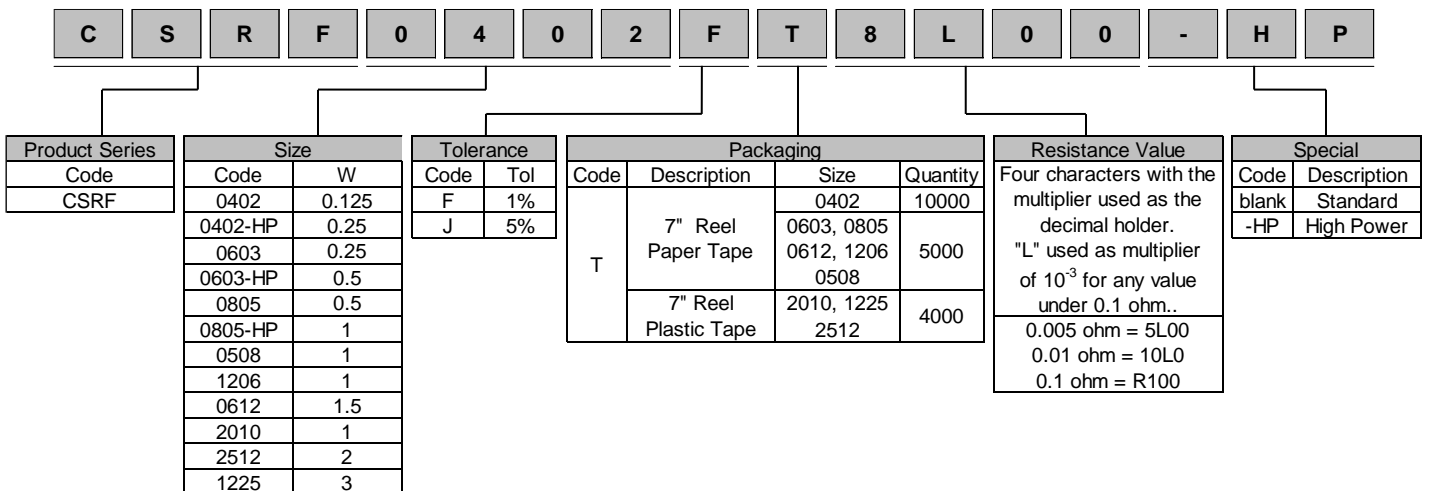

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we strictly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.