

# FRN2JT8R20 Datasheet



DiGi Electronics Part Number	FRN2JT8R20-DG
Manufacturer	<a href="#">Stackpole Electronics Inc</a>
Manufacturer Product Number	FRN2JT8R20
Description	RES 8.2 OHM 5% 2W AXIAL
Detailed Description	8.2 Ohms ±5% 2W Through Hole Resistor Axial Flame Proof, Fusible, Moisture Resistant, Safety Metal Film

<https://www.DiGi-Electronics.com>

This model FRN2JT8R20 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

FRN2JT8R20

Series:

FRN

Resistance:

8.2 Ohms

Power (Watts):

2W

Features:

Flame Proof, Fusible, Moisture Resistant, Safety

Operating Temperature:

-40°C ~ 155°C

Supplier Device Package:

Axial

Height - Seated (Max):

-

Failure Rate:

-

Manufacturer:

Stackpole Electronics Inc

Product Status:

Active

Tolerance:

±5%

Composition:

Metal Film

Temperature Coefficient:

±350ppm/°C

Package / Case:

Axial

Size / Dimension:

0.217" Dia x 0.591" L (5.50mm x 15.00mm)

Number of Terminations:

2

## Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8533.21.0090

Moisture Sensitivity Level (MSL):

Not Applicable

ECCN:

EAR99

# FRN Series

## Fusing Resistor

Stackpole Electronics, Inc.  
Resistive Product Solutions

### Features:

- Coating meets UL 94V-0
- Designed for constant current to provide overload protection
- Consistent performance and reliability
- Cut and formed product is available on select sizes, contact Stackpole for details
- RoHS compliant, REACH compliant, lead free, and halogen free




### Electrical Specifications

Type / Code	Power Rating (W) @ 70°C	Maximum Working Voltage (V) <sup>(1)</sup>	Maximum Overload Voltage (V)	TCR (ppm/°C)	Ohmic Range (Ω) and Tolerance
					5%
FRN16	0.166	150	200	± 350	0.56 - 10K
FRN14	0.25	200	300	± 350	0.22 - 10K
FRN12	0.5	250	400	± 350	0.47 - 10K
FRN1	1	300	600	± 350	0.47 - 10K
FRN2	2	300	600	± 350	1 - 3K

(1) Lesser of  $\sqrt{P \cdot R}$  or maximum working voltage

### Mechanical Specifications

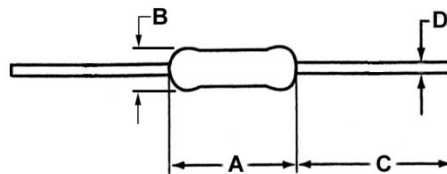


Type / Code	A Body Length	B Body Diameter	C Lead Length (Bulk)	D Lead Diameter	Unit
FRN16	0.126 +0.008 / -0	0.073 ± 0.006	1.102 ± 0.118	0.018 ± 0.002	inches
	3.20 +0.20 / -0	1.85 ± 0.15	28.00 ± 3.00	0.45 ± 0.05	mm
FRN14	0.236 ± 0.020	0.091 ± 0.008	1.102 ± 0.118	0.022 ± 0.002	inches
	6.00 ± 0.50	2.30 ± 0.20	28.00 ± 3.00	0.55 ± 0.05	mm
FRN12	0.354 ± 0.039	0.118 ± 0.020	1.102 ± 0.118	0.028 ± 0.002	inches
	9.00 ± 1.00	3.00 ± 0.50	28.00 ± 3.00	0.70 ± 0.05	mm
FRN1	0.433 ± 0.039	0.157 ± 0.020	1.102 ± 0.118	0.031 ± 0.002	inches
	11.00 ± 1.00	4.00 ± 0.50	28.00 ± 3.00	0.80 ± 0.05	mm
FRN2	0.591 ± 0.039	0.217 ± 0.039	1.378 ± 0.118	0.031 ± 0.002	inches
	15.00 ± 1.00	5.50 ± 1.00	35.00 ± 3.00	0.80 ± 0.05	mm

### Performance Characteristics

Test	Test Result
Moisture Resistance	± 5%
Thermal Shock	± 1%
Load Life @ 70°C - 1000 hours	± 5%
Resistance to Soldering Heat	± 1%
Short Time Overload	± 2%

Operating temperature range is -40°C to +155°C

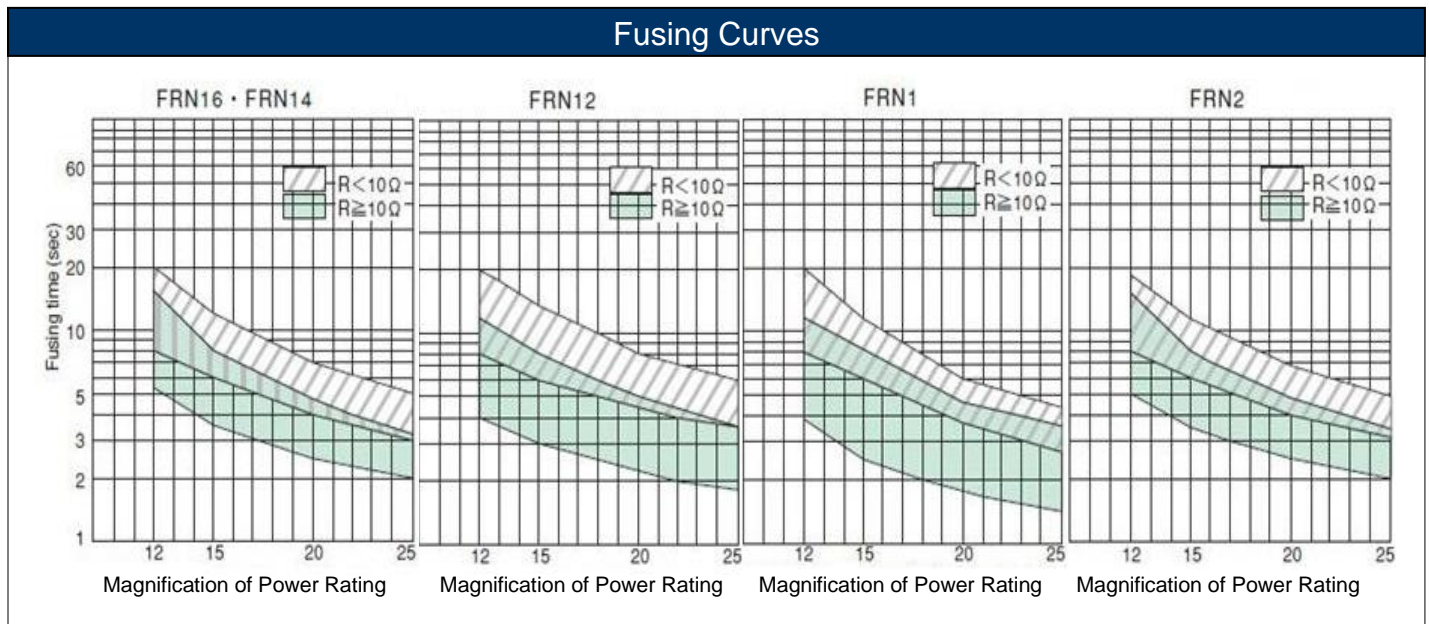

#### Repetitive Pulse Information:

If repetitive pulses are applied to resistors, pulse wave form must be less than “pulse limiting voltage”, “pulse limiting current” or “pulse limiting wattage” calculated by the formula below.


$$V_p = K\sqrt{P \times R \times T/t}$$

$$I_p = K\sqrt{P/P \times T/t}$$

$$P_p = K^2 \times P \times T/t$$

Where:

- $V_p$ : Pulse limiting voltage (V)
- $I_p$ : Pulse limiting current (A)
- $P_p$ : Pulse limiting wattage (W)
- $P$ : Power rating (W)
- $R$ : Nominal resistance (ohm)
- $T$ : Repetitive period (sec)
- $t$ : Pulse duration (sec)
- $K$ : Coefficient: 0.6
- [ $V_r$ : Rated Voltage (V),  $I_r$ : Rated Current (A)]

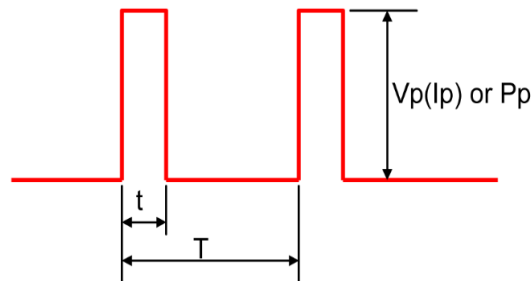

Note 1: If  $T > 10 \rightarrow T = 10$  (sec),  $T/t > 1000 \rightarrow T/t = 1000$

Note 2: If  $T > 10$  and  $T/t > 1000$ , “Pulse Limiting power (Single pulse) is applied

Note 3: If  $V_p < V_r$  ( $I_p < I_r$  or  $P_p < P$ ),  $V_r$  ( $I_r$ ,  $P$ ) is  $V_p$  ( $I_p$ ,  $P_p$ )

Note 4: Pulse limiting voltage (current, wattage) is applied at less than rated ambient temperature.


If ambient temperature is more than the rated temperature (70 °C), decrease power rating according to “Power Derating Curve”

Note 5: Assure sufficient margin for use period and conditions for “pulse limiting voltage”


Note 6: If the pulse waveform is not square wave, judge after transform the waveform into square wave according to the “Waveform Transformation to Square Wave”.

## Waveform Transformation to Square Wave


1. Discharge curve wave with time constant "t" → Square wave

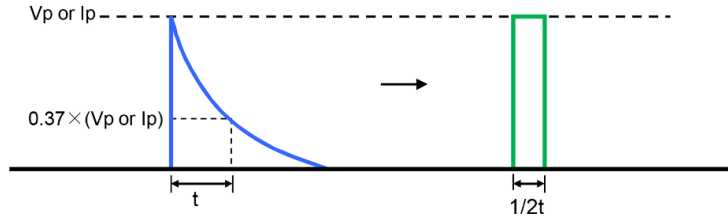


2. Damping oscillation wave with time constant of envelope "t" → Square wave

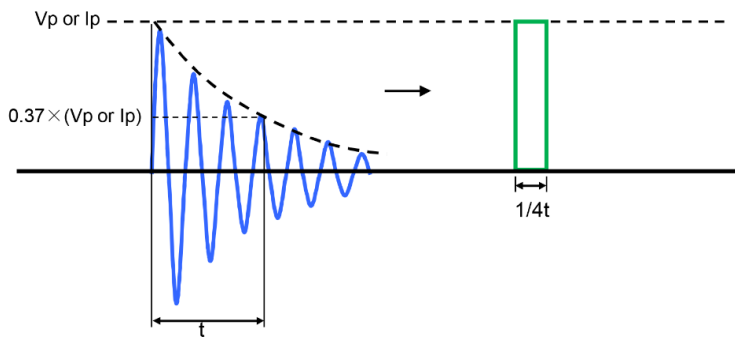


3. Half-wave rectification wave → Square wave

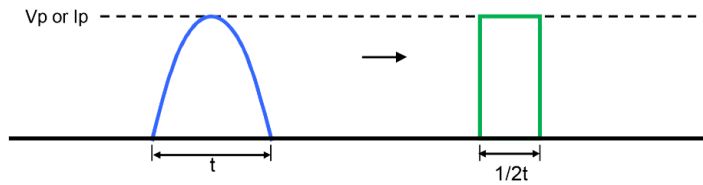

4. Triangular wave → Square wave

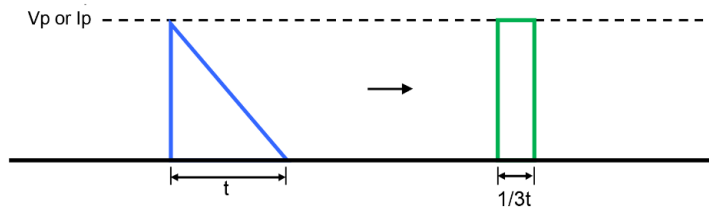

5. Special wave → Square wave

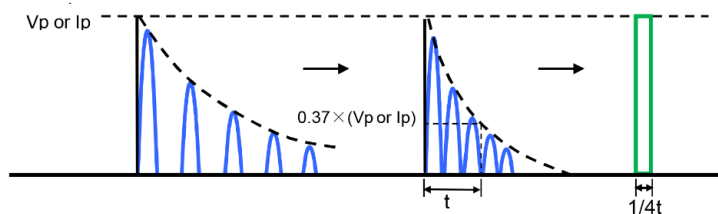


## Recommended Soldering Condition

### Flow Soldering:


- Pre-heating: 110°C MAX
- Peak temperature/duration: 260°C within 10 seconds (1<sup>st</sup>, 2<sup>nd</sup> wave total)
- Temperature profile (see chart on the right)

### Iron Soldering:

- 380°C, 5 seconds, once/terminal

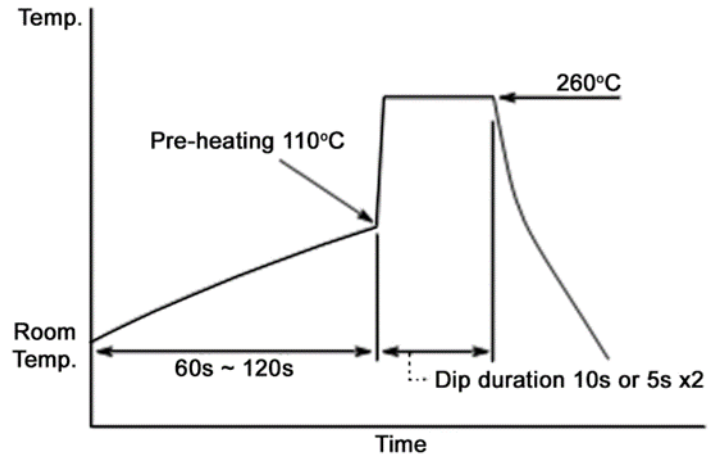

## Reel Specifications

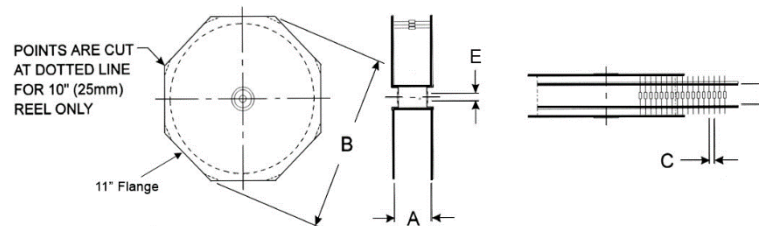

Series	A max <sup>(1)</sup>	B max	C	D <sup>(2)</sup>	Tape	Unit
FRN16	2.618	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
	66.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
FRN14	2.508	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
	63.70	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
FRN12	2.618	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
	66.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
FRN1	2.421	13.504	0.197 ± 0.020	2.063 ± 0.079	0.250	inches
	61.50	343.00	5.00 ± 0.50	52.40 ± 2.00	6.35	mm
FRN2	3.917	13.504	0.394 ± 0.020	2.500 ± 0.079	0.250	inches
	99.50	343.00	10.00 ± 0.50	63.50 ± 2.00	6.35	mm

Dimension "E": This is a non-critical dimension that does not have a tolerance in the standard.

Range of diameters is from 0.547 inches (13.90 mm) to 1.500 inches (38.10 mm).

(1) Reference value only. The "A" dimension shall be governed by the overall length of the taped component.

The distance between flanges shall be 0.059 inches (1.50 mm) to 0.315 (8.00 mm) greater than the overall component.

(2) The given dimension "D" expresses the standard width spacing. A 26 mm narrow spacing is available as option "N" packaging code.

## RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status						
Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
FRN	Axial Leaded Fusing Resistor	Axial	YES	99.3/0.7 Sn/Cu	Apr-05	05/14

## "Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.


## Compliance to "REACH"

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, "The Registration, Evaluation, Authorization and Restriction of Chemicals", otherwise referred to as REACH. Contact us for the complete list of REACH Substance Candidate List.

## Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

## How to Order

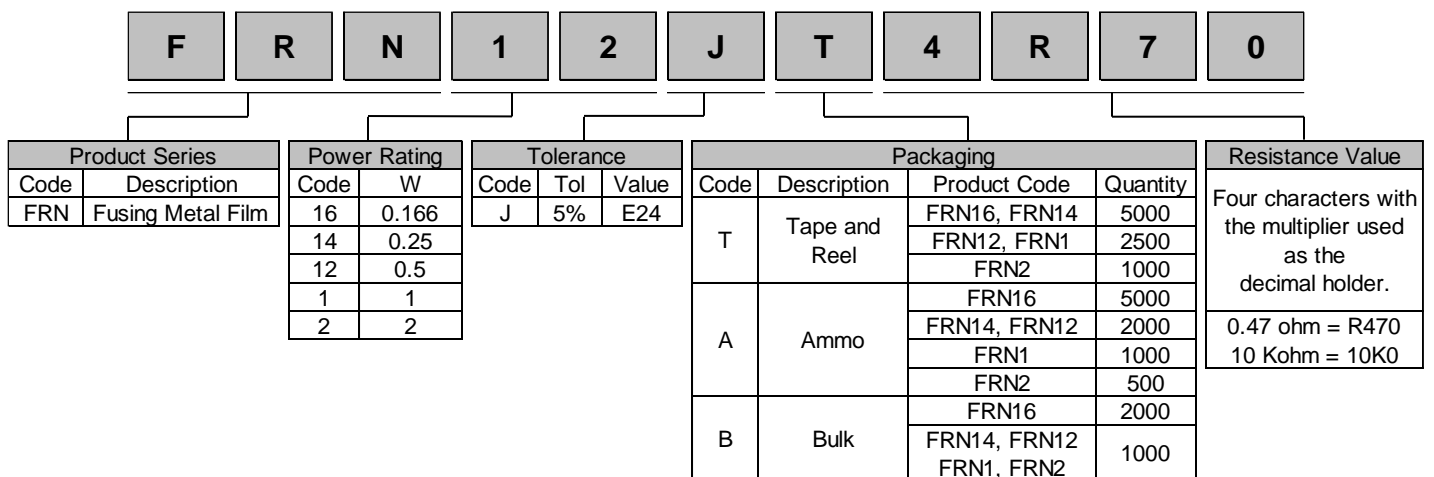

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.