


ESDCAN06-2BLY Datasheet

www.digi-electronics.com

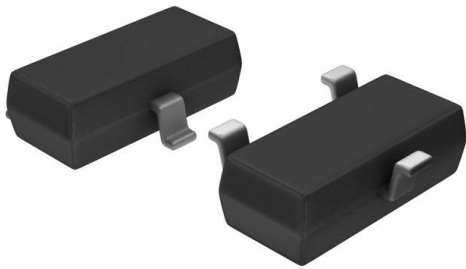

<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	ESDCAN06-2BLY-DG
Manufacturer	STMicroelectronics
Manufacturer Product Number	ESDCAN06-2BLY
Description	TVS DIODE 35VWM 59VC SOT23-3
Detailed Description	59V Clamp 3A (8/20µs) Ipp Tvs Diode Surface Mount SOT-23-3

This model ESDCAN06-2BLY is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

ESDCAN06-2BLY

Series:

-

Type:

Zener

Voltage - Reverse Standoff (Typ):

35V

Voltage - Clamping (Max) @ Ipp:

59V

Power - Peak Pulse:

230W

Applications:

CAN

Operating Temperature:

-40°C ~ 150°C (TJ)

Qualification:

AEC-Q101

Package / Case:

TO-236-3, SC-59, SOT-23-3

Base Product Number:

ESDCAN06

Manufacturer:

STMicroelectronics

Product Status:

Active

Bidirectional Channels:

2

Voltage - Breakdown (Min):

38V

Current - Peak Pulse (10/1000µs):

3A (8/20µs)

Power Line Protection:

No

Capacitance @ Frequency:

13pF @ 1MHz

Grade:

Automotive

Mounting Type:

Surface Mount

Supplier Device Package:

SOT-23-3

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.10.0080


Moisture Sensitivity Level (MSL):

1 (Unlimited)


ECCN:

EAR99

Automotive dual-line TVS in SOT23-3L for CAN bus




SOT23-3L
(Jedec TO-236)


Product status link

[ESDCAN01-2BLY](#), [ESDCAN24-2BLY](#),
[ESDCAN04-2BLY](#), [ESDCAN06-2BLY](#)

Features

- AEC-Q101 qualified 
- Dual-line ESD and EOS protection
- Breakdown voltage: V_{BR}
 - ESDCAN01-2BLY: 25 V
 - ESDCAN24-2BLY: 27 V
 - ESDCAN04-2BLY: 27.5 V
 - ESDCAN06-2BLY: 38 V
- Bidirectional device
- Max pulse power up to 230 W (8/20 μ s)
- Low clamping factor V_{CL} / V_{BR}
- **ECOPACK2** ROHS compliant component

Complies with the following standards

- UL94, V0
- J-STD-020 MSL level 1
- IPC7531 footprint and JEDEC registered package
- ISO 16750-2 (Jump start and reversed battery tests for 12 V system))
- IEC 61000-4-4 (EFT)
 - 4 kV
- ISO 10605 C = 150 pF, R = 330 Ω , exceeds level 4:
 - ± 30 kV (Contact and air discharge)
- ISO 10605 C = 330 pF, R = 330 Ω exceeds level 4:
 - ± 30 kV (Contact and air discharge)
- ISO 10605 C = 330 pF, R = 2 k Ω exceeds level 4:
 - ± 30 kV (Contact and air discharge)
- ISO 7637-3:
 - Pulse 3a: -150 V
 - Pulse 3b: +150 V
 - Pulse 2a: +/- 85 V

Description

These dual-line CAN transceiver protection devices (TVS) protect both CAN H and CAN L signals of automotive CAN PHY against ISO 7637-3 transients and ESD (electrostatic discharge).

ESDCAN series complies with all the physical layer constraints (jump start, reverse polarity, ...) without compromising the low clamping voltage for an efficient CAN bus protection (controller area network) or LIN bus protection (local interconnect network).

The low line capacitance versions make them compliant with CAN-FD and high speed buses like FlexRay, USB, and even the future CAN XL.



1 Characteristics

Table 1. Absolute ratings ($T_{amb} = 25\text{ }^{\circ}\text{C}$)

Symbol	Parameter		Value	Unit	
V_{PP}	Peak pulse voltage	ISO 10605 - C = 150 pF, R = 330 Ω : Contact and air discharge	30	kV	
		ISO 10605 - C = 330 pF, R = 330 Ω : Contact and air discharge	ESDCAN24-2BLY ESDCAN01-2BLY ESDCAN04-2BLY		30
		ISO 10605 - C = 330 pF, R = 330 Ω : Contact discharge	ESDCAN06-2BLY		22
		Air discharge			30
		ISO 10605 - C = 330 pF, R = 2 k Ω : Contact and air discharge			30
I_{PP}	Peak pulse current (8/20 μs)	ESDCAN24-2BLY ESDCAN01-2BLY	5.5	A	
		ESDCAN04-2BLY	3.7		
		ESDCAN06-2BLY	3		
T_j	Operating junction temperature range		-40 to +150	$^{\circ}\text{C}$	
T_{stg}	Storage temperature range		-55 to +150	$^{\circ}\text{C}$	

Figure 1. Electrical characteristics (definitions)

Symbol	Parameter
V_{BR}	= Breakdown voltage
V_{RM}	= stand-off voltage
V_{CL}	= Clamping voltage
I_{RM}	= Leakage current at V_{RM}
I_{PP}	= Peak pulse current
R_d	= Dynamic impedance
C_{LINE}	= Input capacitance per line

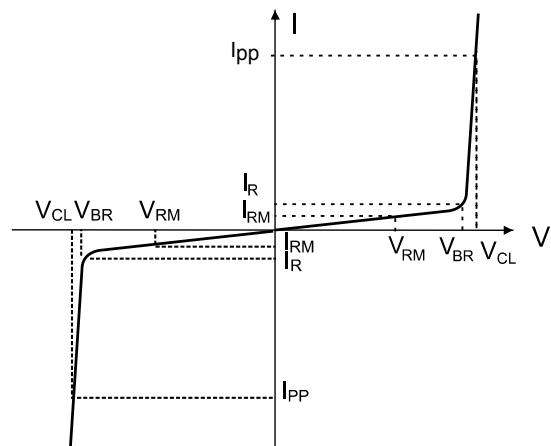



Table 2. Electrical characteristics (values, $T_{amb} = 25\text{ }^{\circ}\text{C}$)

Order code	I_{RM} max. at V_{RM}		V_{BR} at I_R			V_{CL} Pulse ISO7637-3		V_{CL} at I_{PP} (8/20 μs)		C		$\Delta C^{(1)}$	$\alpha T^{(2)}$
			Min.	Max.		3a at -150 V min.	3b at +150 V max.	Max.		Typ.	Max.	Typ.	Typ.
	μA	V	V		mA	V		V	A	pF		pF	$10^{-4}/^{\circ}\text{C}$
ESDCAN24-2BLY	0.1	24	27	32	1	-40	40	43	5	-	30	0.1	9
ESDCAN01-2BLY	0.1	24	25	30	1	-35	35	40	5	-	30	0.1	9
ESDCAN04-2BLY	0.05	25.5	27.5	30.7	1	-35	35	43	3	17	19	0.1	9
ESDCAN06-2BLY	0.1	35	38	42.2	1	-44	44	59	3	13	15	0.1	9

1. ΔC : capacitance variation between IO1 and IO2 versus GND

2. to calculate V_{BR} versus T_j : V_{BR} at $T_j = V_{BR}$ at $25\text{ }^{\circ}\text{C} \times (1 + \alpha T \times (T_j - 25))$



1.1 Characteristics (curves)

Figure 2. Maximum peak current versus initial junction temperature

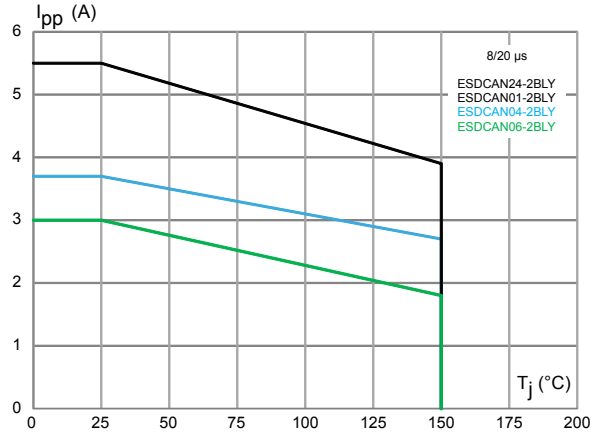


Figure 3. Maximum peak pulse current versus exponential pulse duration

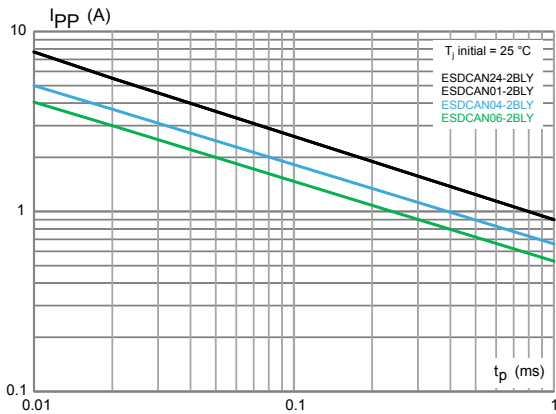


Figure 4. Clamping voltage versus peak pulse current

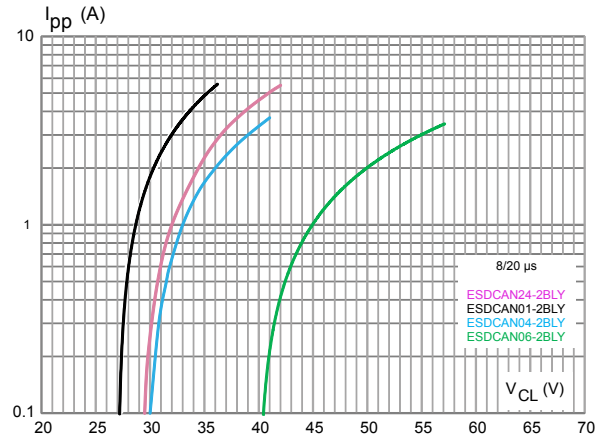


Figure 5. Junction capacitance versus reverse voltage

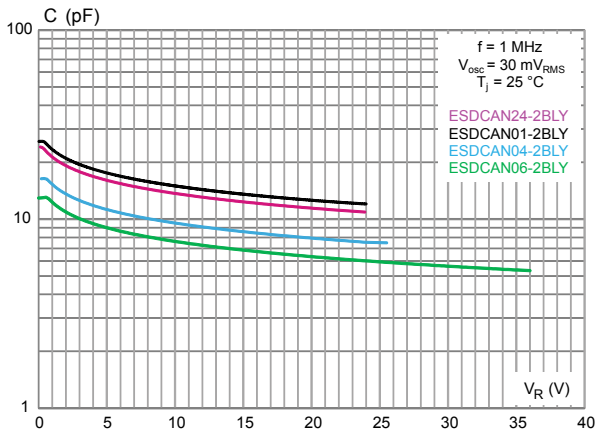


Figure 6. Leakage current versus junction temperature

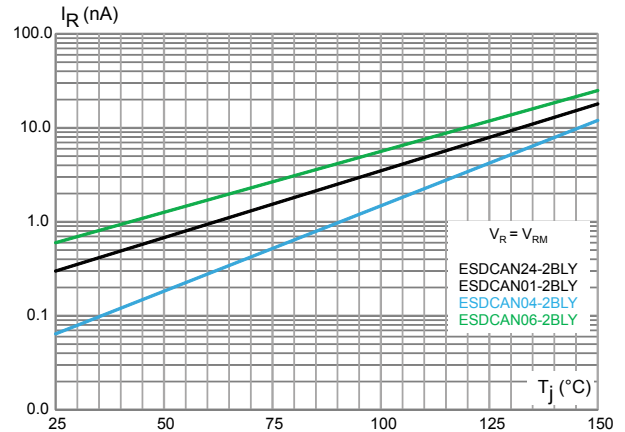




Figure 7. Response to ISO 10605 -C = 150 pF, R = 330 Ω (-8 kV contact)

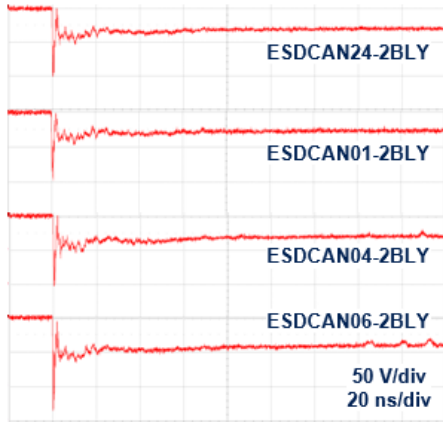


Figure 8. Response to ISO 10605 - C = 150 pF, R = 330 Ω (+8 kV contact)

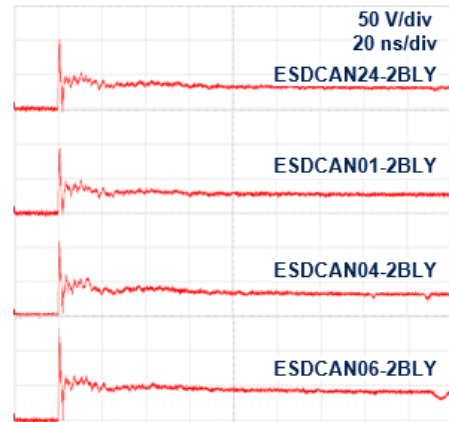


Figure 9. Response to ISO 7637-3 Pulse 3a: -150 V

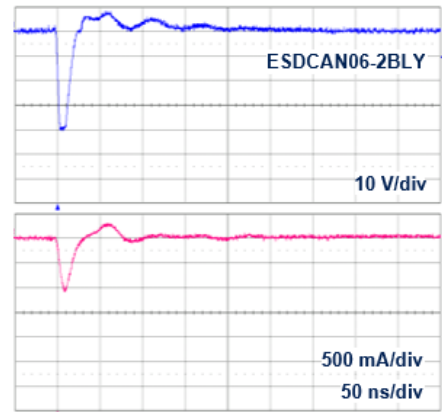
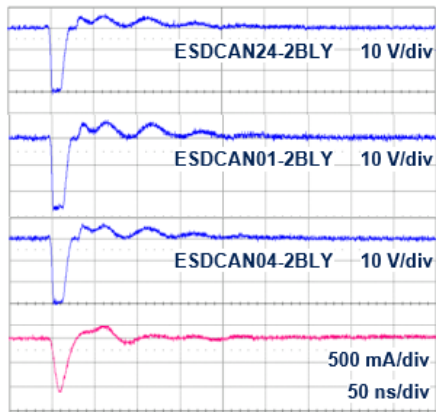


Figure 10. Response to ISO 7637-3 Pulse 3b : +150 V

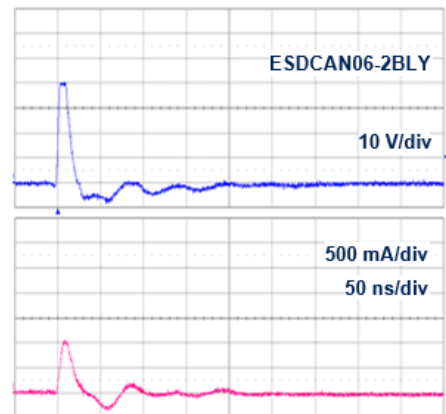
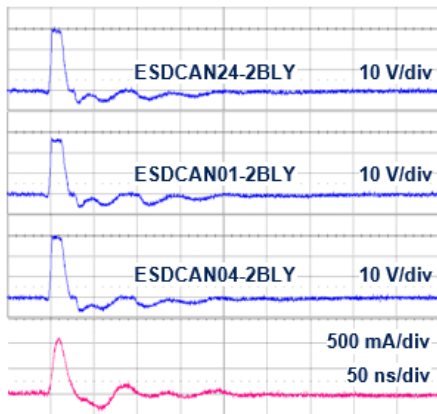




Figure 11. Response to ISO 7637-3 pulse 2a: -85 V

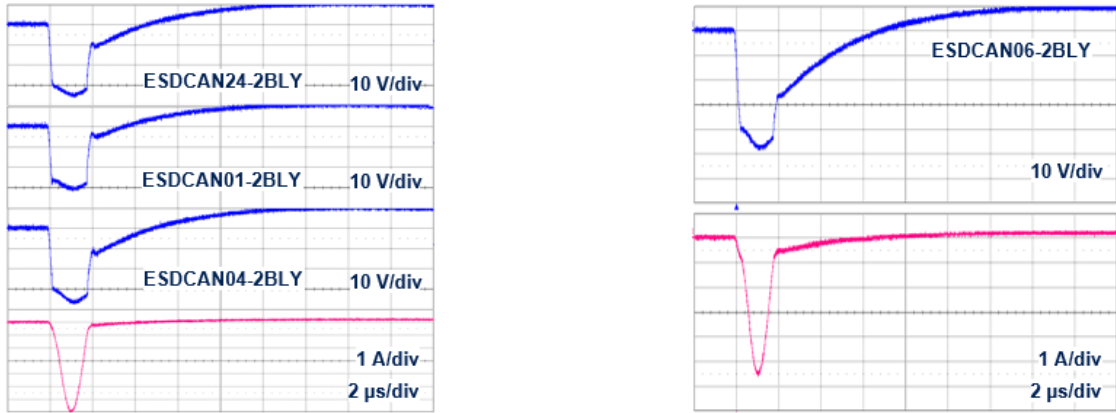


Figure 12. Response to ISO 7637-3 pulse 2a: +85 V

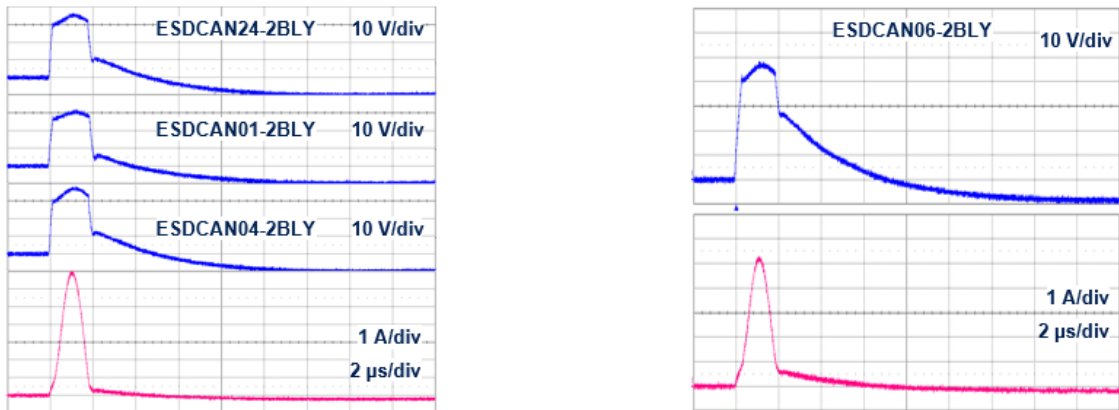


Figure 13. S21 attenuation


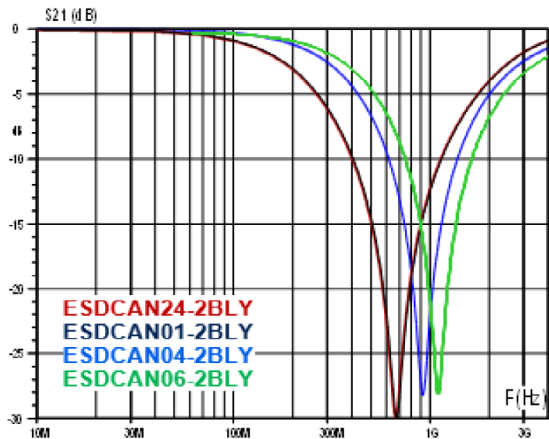


Figure 14. TLP

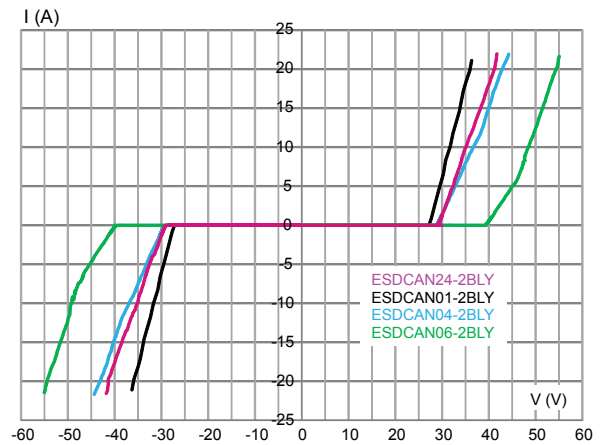

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 SOT23-3L package information

Figure 15. SOT23-3L package outline

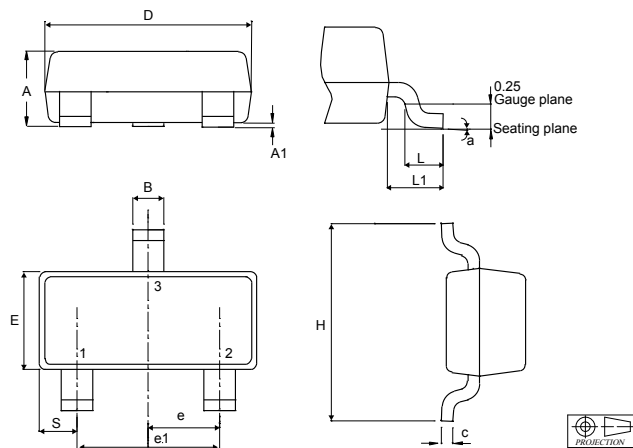


Table 3. SOT23-3L package mechanical data

Ref.	Dimensions					
	Millimeters			Inches ⁽¹⁾		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.89		1.25	0.0350		0.050
A1	0.00		0.15	0.0000		0.006
B	0.30		0.51	0.011		0.021
C	0.085		0.20	0.003		0.008
D	2.75		3.04	0.108		0.120
E	1.20		1.75	0.047		0.069
e	0.85	0.95	1.05	0.033	0.037	0.042
e1	1.70	1.90	2.10	0.066	0.075	0.083
H	2.10		3.00	0.082		0.119
L	0.25		0.61	0.009		0.025
L1		0.55			0.022	
S	0.35		0.65	0.013		0.026
a	0°		8°	0°		8°

1. Dimension in inches are given for reference only.



Figure 16. SOT23-3L marking

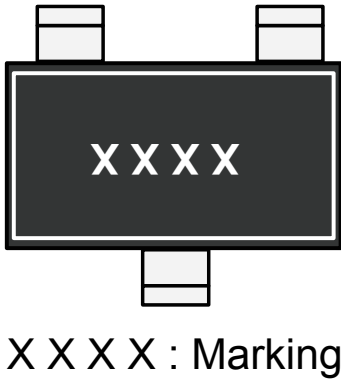


Figure 17. SOT23-3L footprint in mm


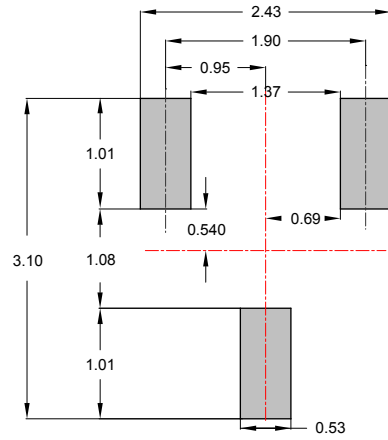


Figure 18. Package orientation in reel

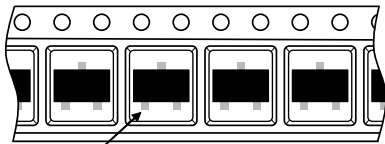

Pin 1 located according to EIA-481

Note: Pocket dimensions are not on scale
Pocket shape may vary depending on package

Figure 19. Tape and reel orientation

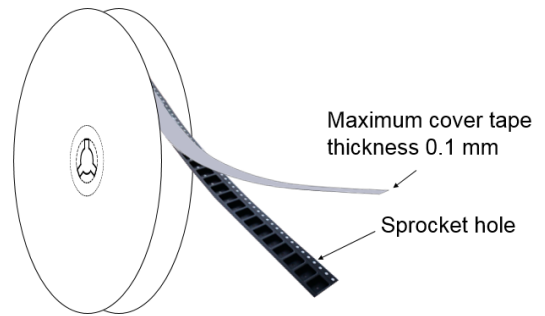


Figure 20. 7" reel dimension values

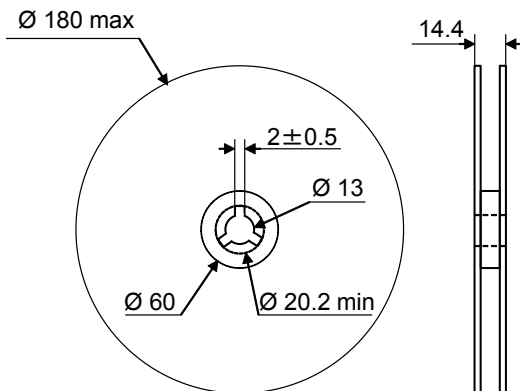


Figure 21. Inner box dimension values

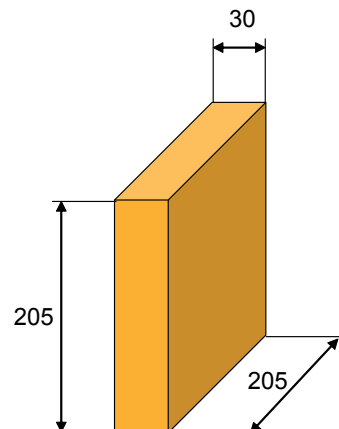
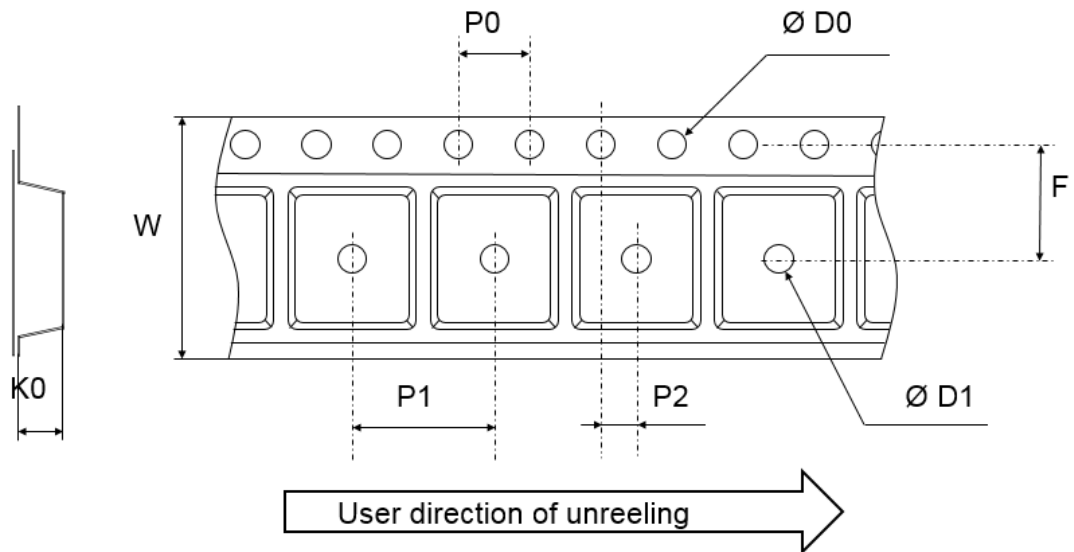


Figure 22. Tape outline


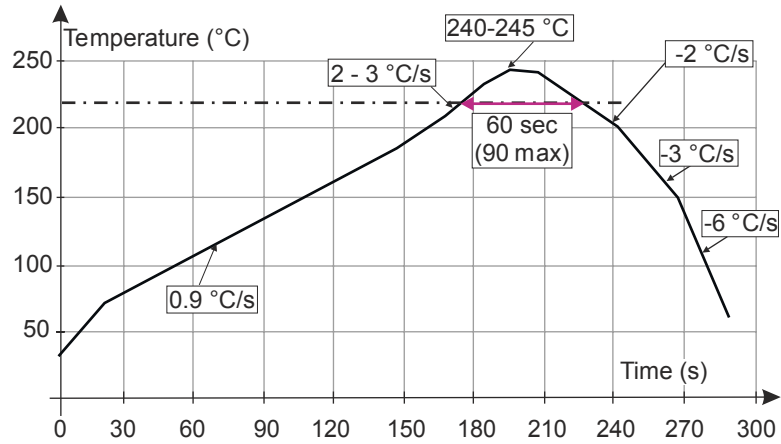
Note: Pocket dimensions are not on scale
 Pocket shape may vary depending on package

Table 4. Tape dimension values

Ref.	Dimensions		
	Millimeters		
	Min.	Typ.	Max.
D0	1.45	1.5	1.6
D1	1		
F	3.45	3.5	3.55
K0	1.3	1.4	1.5
P0	3.9	4.0	4.1
P1	3.9	4.0	4.1
P2	1.95	2.0	2.05
W	7.9	8	8.3

3 Reflow profile

Figure 23. ST ECOPACK® recommended soldering reflow profile for PCB mounting



Note: Minimize air convection currents in the reflow oven to avoid component movement. Maximum soldering profile corresponds to the latest IPC/JEDEC J-STD-020.



4 Ordering information

Figure 24. Ordering information scheme

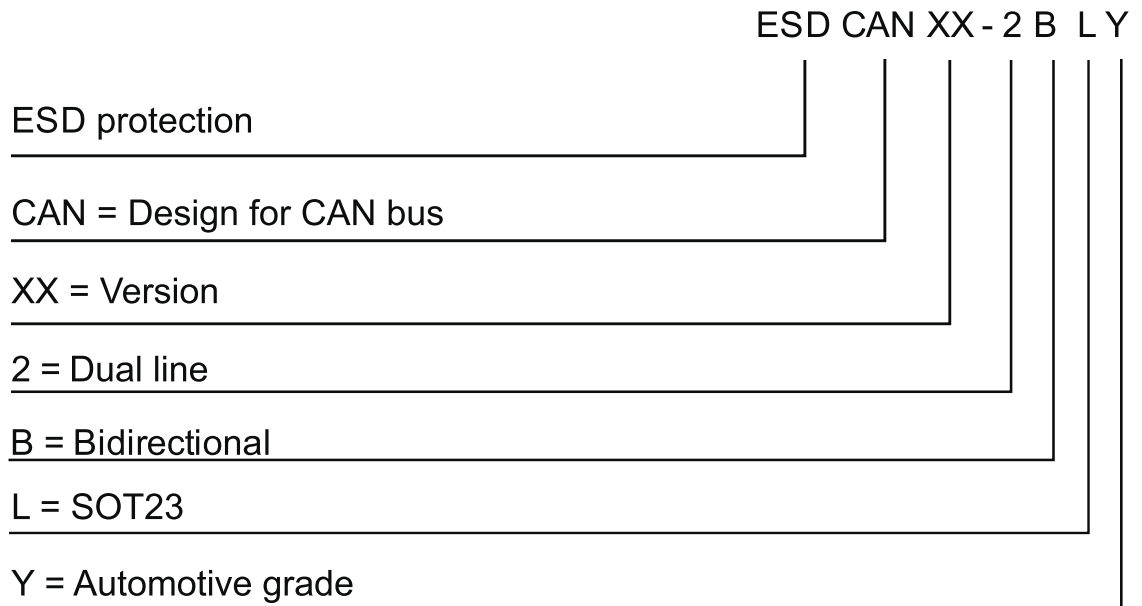


Table 5. Ordering information

Order code	Marking ⁽¹⁾	Package	Weight	Base qty.	Delivery mode
ESDCAN24-2BLY	EL24	SOT23-3L	9.8 mg	3000	Tape and reel
ESDCAN01-2BLY	EN24				
ESDCAN04-2BLY	EC24				
ESDCAN06-2BLY	EC35				

1. The marking can be rotated by multiples of 90° to differentiate assembly location



Revision history

Table 6. Document revision history

Date	Revision	Changes
13-Jul-2015	1	First issue.
04-Oct-2018	2	Added RPN ESDCAN04-2BLY and ESDCAN06-2BLY. Updated cover page, Section 1 Characteristics and Section 1.1 Characteristics (curves) . Added Packing and marking information.
05-Apr-2019	3	Added typical pitch in Table 3 and updated Figure 17 .
21-Jul-2022	4	Updated Features , Description and Table 1 .

**IMPORTANT NOTICE – READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2022 STMicroelectronics – All rights reserved

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.