

STTH310 Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	STTH310-DG
Manufacturer	STMicroelectronics
Manufacturer Product Number	STTH310
Description	DIODE GEN PURP 1KV 3A DO201AD
Detailed Description	Diode 1000 V 3A Through Hole DO-201AD

This model STTH310 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.

Purchase and inquiry

Manufacturer Product Number:

STTH310

Series:

-

Technology:

Standard

Current - Average Rectified (Io):

3A

Speed:

Fast Recovery =< 500ns, > 200mA (Io)

Current - Reverse Leakage @ Vr:

10 μ A @ 1000 V

Mounting Type:

Through Hole

Supplier Device Package:

DO-201AD

Base Product Number:

STTH310

Manufacturer:

STMicroelectronics

Product Status:

Active

Voltage - DC Reverse (Vr) (Max):

1000 V

Voltage - Forward (Vf) (Max) @ If:

1.7 V @ 3 A

Reverse Recovery Time (trr):

75 ns

Capacitance @ Vr, F:

-

Package / Case:

DO-201AD, Axial

Operating Temperature - Junction:

-40°C ~ 175°C

Environmental & Export classification

RoHS Status:

ROHS3 Compliant

REACH Status:

REACH Unaffected

HTSUS:

8541.10.0080


Moisture Sensitivity Level (MSL):

1 (Unlimited)

ECCN:

EAR99

1000 V - 3 A high efficiency ultrafast diode

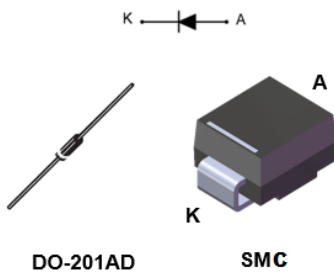

Features

- Low forward voltage drop
- High reliability
- High surge current capability
- Soft switching for reduced EMI disturbances
- Planar technology
- ECOPACK2 compliant

Applications

- Switching diode
- Auxiliary power supply

Description

The STTH310, which uses ST ultrafast high voltage planar technology, is specially suited for free-wheeling, clamping, snubbing, demagnetization in power supplies and other power switching applications.

Product status	
STTH310	
Product summary	
Symbol	Value
$I_{F(AV)}$	3 A
V_{RRM}	1000 V
$T_{j(max.)}$	175 °C
$V_{F(typ.)}$	0.98 V
$t_{rr(max.)}$	75 ns

1 Characteristics

Table 1. Absolute ratings (limiting values at 25 °C, unless otherwise specified)

Symbol	Parameter		Value	Unit	
V_{RRM}	Repetitive peak reverse voltage		1000	V	
$I_{F(AV)}$	Average forward current $\delta = 0.5$, square wave	DO-201AD	$T_L = 75\text{ °C}$	3	A
		SMC	$T_L = 75\text{ °C}$		
I_{FSM}	Surge non repetitive forward current	DO-201AD	$t_p = 8.3\text{ ms}$ sinusoidal	55	A
		SMC		45	
T_{stg}	Storage temperature range		-65 to +175	°C	
T_j	Maximum operating junction temperature		+175	°C	

Table 2. Thermal resistance parameter

Symbol	Parameter		Max. value	Unit
$R_{th(j-l)}$	Junction to lead		20	°C/W
	Junction to lead		20	
$R_{th(j-a)}$	Junction to ambient	Lead length = 10 mm	75	

For more information, please refer to the following application note :

- AN5088 : Rectifiers thermal management, handling and mounting recommendations

Table 3. Static electrical characteristics

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
$I_R^{(1)}$	Reverse leakage current	$T_j = 25\text{ °C}$	$V_R = V_{RRM}$	-		10	μA
		$T_j = 125\text{ °C}$		-		50	
$V_F^{(2)}$	Forward voltage drop	$T_j = 25\text{ °C}$	$I_F = 3\text{ A}$	-		1.7	V
		$T_j = 150\text{ °C}$		-	0.98	1.42	

1. Pulse test: $t_p = 5\text{ ms}$, $\delta < 2\%$

2. Pulse test: $t_p = 380\text{ }\mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses, use the following equation:

$$P = 1.20 \times I_{F(AV)} + 0.075 \times I_F^2_{(RMS)}$$

For more information, please refer to the following application notes related to the power losses :

- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode


Table 4. Dynamic characteristics ($T_j = 25\text{ °C}$ unless otherwise stated)

Symbol	Parameters	Test conditions	Min.	Typ.	Max.	Unit
t_{rr}	Reverse recovery time	$I_F = 0.5\text{ A}$, $I_{rr} = 0.25\text{ A}$, $I_R = 1\text{ A}$	-	-	75	ns
t_{fr}	Forward recovery time	$I_F = 3\text{ A}$, $di_F/dt = 50\text{ A}/\mu\text{s}$, $V_{FR} = 1.1 V_{F(max)}$	-	-	300	ns
V_{FP}	Forward recovery voltage		-	-	12	V



1.1 Characteristics (curves)

Figure 1. Conduction losses versus average current

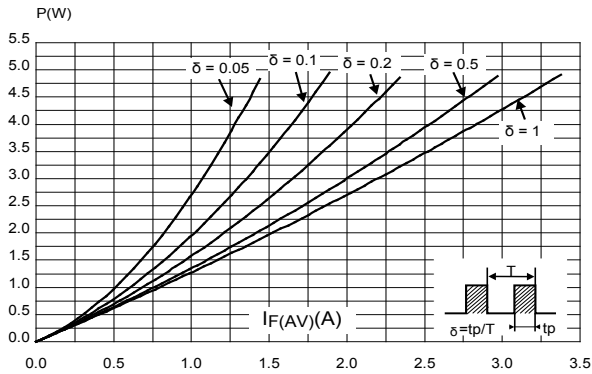


Figure 2. Forward voltage drop versus forward current

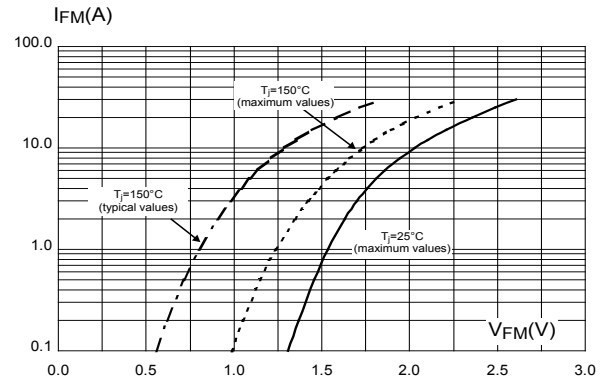


Figure 3. Relative variation of thermal impedance junction to ambient versus pulse duration (DO-201AD)

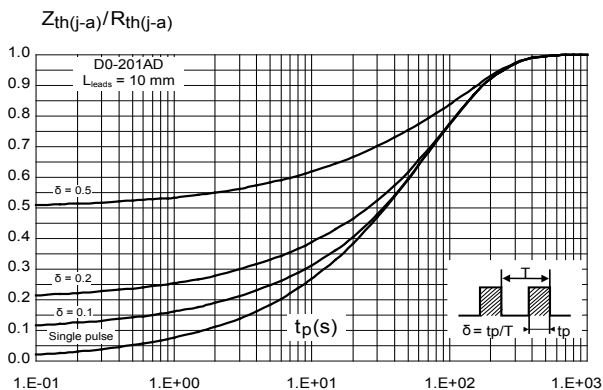


Figure 4. Relative variation of thermal impedance junction to ambient versus pulse duration (SMC)

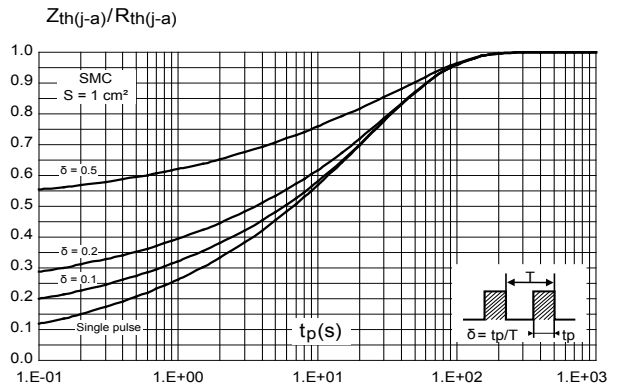


Figure 5. Thermal resistance versus lead length (DO-201AD)


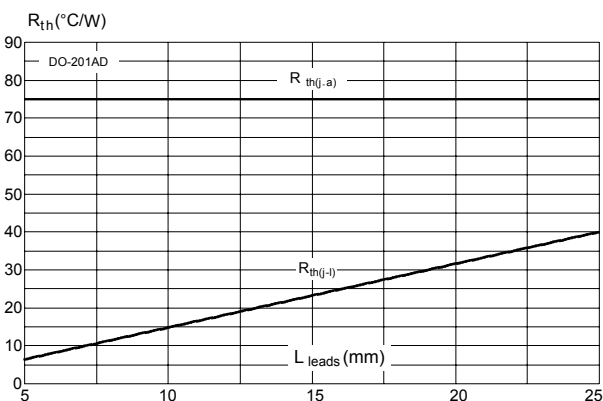


Figure 6. Thermal resistance junction to ambient versus copper surface under each lead (typical values) (SMC)

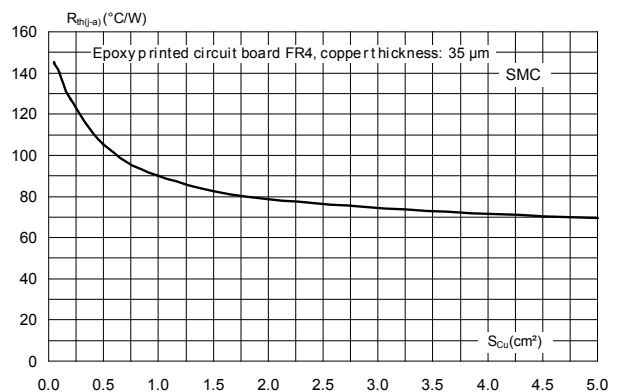

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 DO-201AD package information

- Epoxy meets UL 94, V0

Figure 7. DO-201AD package outline

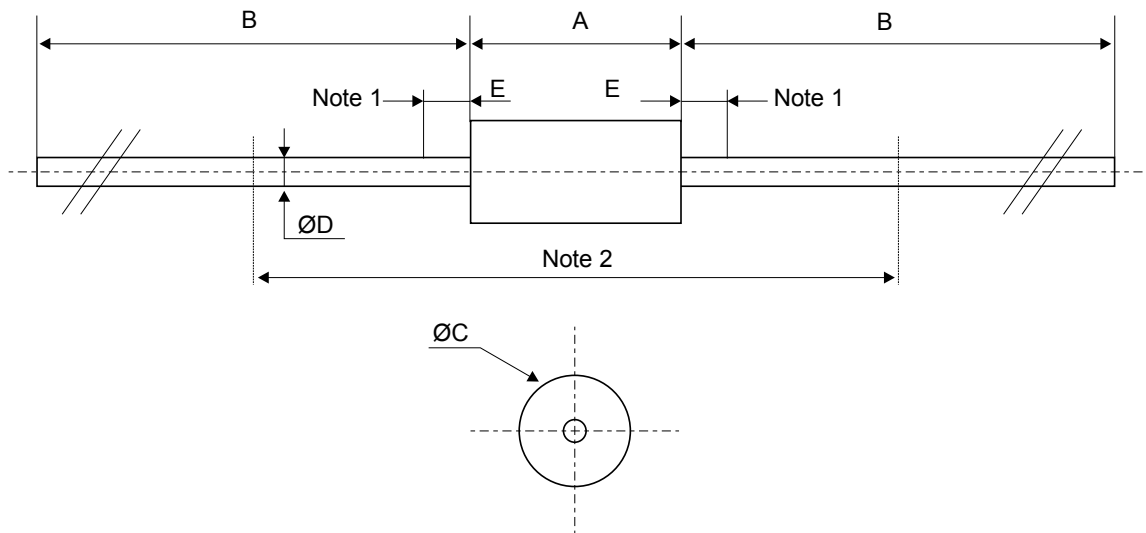


Table 5. DO-201AD package mechanical data

Ref.	Dimensions					
	Millimeters			Inches (for reference only)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A		-	9.50		-	0.374
B	25.40	-		1.000	-	
C		-	5.30		-	0.209
D ⁽¹⁾		-	1.30		-	0.051
E		-	1.25		-	0.049
Note 2 ⁽²⁾	15.00			0.590		

1. The lead diameter *D* is not controlled over zone *E*
2. The minimum length, which must stay straight between the right angles after bending, is 15 mm (0.59")

2.2 SMC package information

- Epoxy meets UL94, V0

Figure 8. SMC package outline


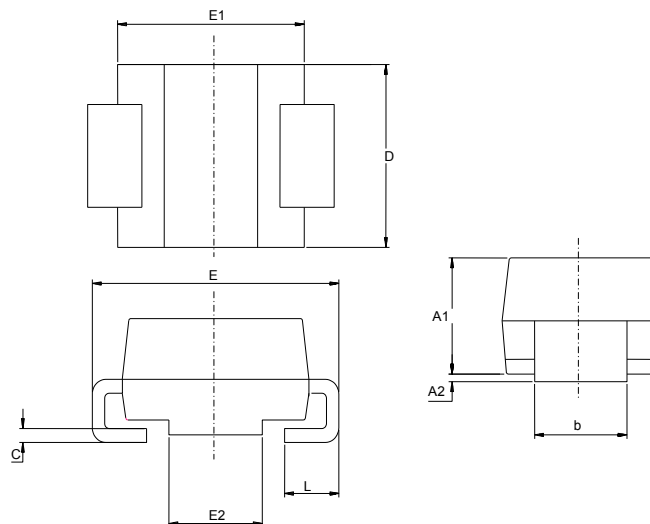


Table 6. SMC package mechanical data

Ref.	Dimensions			
	Millimeters		Inches (for reference only)	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.0748	0.0965
A2	0.05	0.20	0.0020	0.0079
b	2.90	3.20	0.1142	0.1260
c	0.15	0.40	0.0059	0.0157
D	5.55	6.25	0.2185	0.2461
E	7.75	8.15	0.3051	0.3209
E1	6.60	7.15	0.2598	0.2815
E2	4.40	4.70	0.1732	0.1850
L	0.75	1.50	0.0295	0.0591

Figure 9. SMC recommended footprint



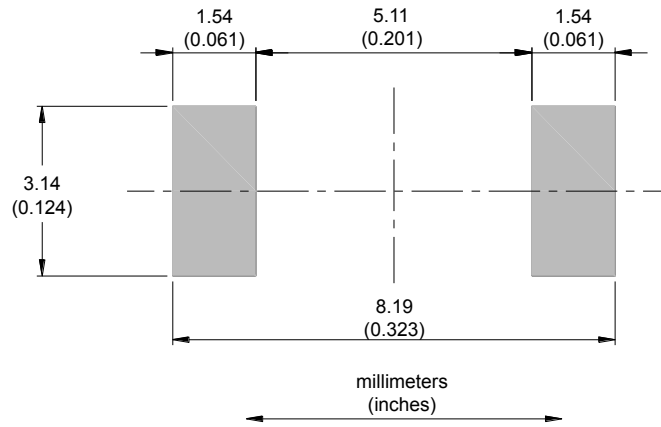

3 Ordering information

Table 7. Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
STTH310S	S10	SMC	0.245 g	2500	Tape and reel
STTH310	STTH310	DO-201AD	1.16 g	600	Ammopack
STTH310RL	STTH310		1.16 g	1900	Tape and reel



Revision history

Table 8. Document revision history

Date	Revision	Changes
Jan-2003	1	Initial release.
03-Apr-2007	2	DO-201AD C2 package added. SMC package information updated.
07-Dec-2009	3	Updated Table 6 package dimensions.
21-Jun-2012	4	Updated T_j in Table 1 and Table 2 and change min. T_{stg} to $-65\text{ }^{\circ}\text{C}$ in Table 2.
31-Mar-2020	5	Updated Figure 4 , Figure 5 and Figure 6 . Reformatted to current standard.

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved

OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: Info@DiGi-Electronics.com



Tel: +00 852-30501935

RFQ Email: Info@DiGi-Electronics.com

DiGi is a global authorized distributor of electronic components.