

# RJSNE528008 Datasheet



<https://www.DiGi-Electronics.com>

DiGi Electronics Part Number	RJSNE528008-DG
Manufacturer	<a href="#">Amphenol ICC (Commercial Products)</a>
Manufacturer Product Number	RJSNE528008
Description	CONN MOD JACK 8P8C R/A
Detailed Description	Jack Modular Connector 8p8c (RJ45, Ethernet) 90° Angle (Right)

This model RJSNE528008 is available at DiGi Electronics.

DiGi Electronics offers a global database of semiconductor and electronic component datasheets.

We welcome your inquiries regarding pricing, lead time, or other product-related questions.

 [Request a Quote](#)

 [Datasheet Search](#)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.

## Purchase and inquiry

Manufacturer Product Number:

RJSNE528008

Series:

RJSNE

Connector Type:

Jack

Number of Ports:

8

Mounting Type:

Through Hole

Termination:

Solder

Ratings:

-

LED Color:

Does Not Contain LED

Tab Direction:

Up and Down

Contact Finish:

Gold

Housing Material:

Thermoplastic

Base Product Number:

RJSNE528

Manufacturer:

Amphenol ICC (Commercial Products)

Product Status:

Obsolete

Number of Positions/Contacts:

8p8c (RJ45, Ethernet)

Number of Rows:

2

Orientation:

90° Angle (Right)

Shielding:

-

Features:

-

Ingress Protection:

-

Contact Material:

Phosphor Bronze

Contact Finish Thickness:

50.0µin (1.27µm)

Operating Temperature:

-40°C ~ 85°C

## Environmental & Export classification

RoHS Status:

RoHS Compliant

ECCN:

EAR99

Moisture Sensitivity Level (MSL):

1 (Unlimited)

HTSUS:

8536.69.4040

# RJSNE

## Product Specification S6070C Rev 1.0

# Amphenol

*Now you're connected!*

### About Amphenol Commercial Products

Amphenol's commercial connector products are used in a variety of end user applications including networking, telecom, server & computer, storage & HDD, consumer electronics and entertainment, professional audio & Industrial & Military/Aerospace.

### Related Products

#### RJSSE




P/N RJSSE-5381 SHOWN  
SINGLE PORT, 8 POSITION,  
WITH SHIELD AND LIGHT PIPE


#### RJHSE




P/N RJHSE-3081 SHOWN  
SINGLE PORT VERTICAL MOUNT,  
NO SHIELD, WITH LEDs



P/N RJHSE-5385-02 SHOWN  
TWO PORT REGULAR MOUNT,  
WITH SHIELD AND LEDs

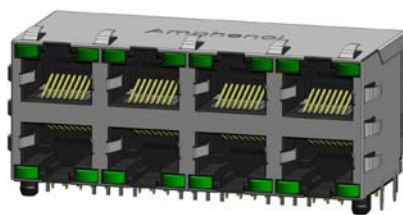

P/N RJSNE-5385-08 SHOWN

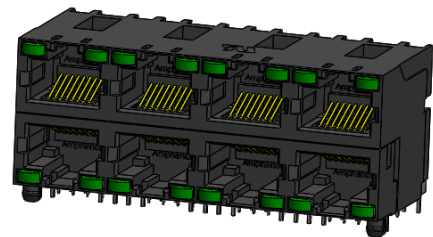

P/N RJSNE-5085-08 SHOWN

### Overview

This product specification defines the general use and performance parameters for Amphenol's RJSNE series of modular jacks.

Availability: 2x4 ports available with a wide variety of LED and shielding options.

### Usage

The RJSNE series of modular jacks supports Ethernet Protocols. Shielding available for increased EMI performance and LEDs for Link Activity and Network Speed verification.

### Applications

Intended for use in applications such as:  
Networking & Telecom

- Wireless (WiMAX)
- Network servers
- Hubs, routers, switches

Office & Home Equipment

- PC's, Laptops, Copiers/Printers
- Telephones, modems
- Surge Protectors
- ATMs, Vending Machines

Consumer Goods

- Security Systems
- Set Top Boxes
- Video Game Systems

Miscellaneous

- Multi-Media Equipment
- Industrial Equipment
- POS Terminals


# Now you're connected!

## About Amphenol Commercial Products

Amphenol's commercial connector products are used in a variety of end user applications including networking, telecom, server & computer, storage & HDD, consumer electronics and entertainment, professional audio & Industrial & Military/Aerospace.

## Related Products

### RJULE




P/N RJULE-4X182-01 SHOWN  
SINGLE PORT REGULAR MOUNT,  
STANDARD SHIELD WITH SMT

### FRJAE



P/N FRJAE-418 SHOWN  
SINGLE PORT, 8 POSITION,  
WITH FERRITE FILTER AND  
SHIELD (FRONT TABS)

### RJLSE



P/N RJLSE-41181-01 SHOWN  
SINGLE PORT REGULAR MOUNT,  
STANDARD SHIELD WITH SMT

## Electrical Characteristics

Contact resistance:	20 mΩ max.
Insulation resistance:	500 MΩ minimum at 500V DC for 2 minutes max.
Current rating:	1.5 Amps
Voltage rating:	125 Volts AC
DWV	1000 VAC, 60 Hz. 1 min.
LED forward DC current:	20mA typical
LED forward Voltage:	1.9 Volts max. @ 2mA (for single colors) 2.6 Volts max. @ 20mA (for Bi-colors)
LED reverse voltage:	5 Volts minimum
LED light intensity:	0.4 to 1.5 mcd @ 2mA (for single colors) 0.5 mcd min. @ 2mA (for Bi-colors)
LED wave length:	Yellow: 587± 7 nm measured @ 20mA Green: 565± 6 nm measured @ 20mA Red: 625± 5 nm measured @ 20mA

## Mechanical Characteristics

Mating connector insertion force:	5.0 lbs. Maximum.
Mating connector pull retention force:	20 lbs Minimum.
Durability:	750 mating & unmating cycles
Recommended soldering temperature:	Wave soldering peaked at 260° C for 5 seconds maximum.
Operating temperature:	-40° C to +85° C

## Material Requirements

RJSNE connectors are RoHS compliant.

Unless otherwise specified, the materials for each component shall be:

### Insulator:

- Engineering thermoplastic. Complies with UL 94V-0, Black color

### Contacts:

- Phosphor Bronze hard temper with gold thickness options (6μ", 15μ", 30μ", 50μ") over 50μ" minimum Nickel on contact mating area.
- 100μ" minimum matte tin plating on soldering tail

### Shield:

- Copper alloy, Nickel plated with tin dipped tail or stainless steel with tin dipped tail.

### LED:

- Pure Tin plating on LED tail

## Available Documents

### Drawing Numbers:

P-RJSNE-X38X-X8X	2X4 ports stackable modular jack, shielded, 8 position, 8 contacts, with tail length option and LED option.
P-RJSNE-X08X-X8X	2X4 ports stackable modular jack, 8 position, 8 contacts, with tail length option and LED option.

Contact factory or Authorized Amphenol representative for additional configurations

## OUR CERTIFICATE

DiGi provide top-quality products and perfect service for customer worldwide through standardization, technological innovation and continuous improvement. DiGi through third-party certification, we stricly control the quality of products and services. Welcome your RFQ to

Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)



Tel: +00 852-30501935

RFQ Email: [Info@DiGi-Electronics.com](mailto:Info@DiGi-Electronics.com)

DiGi is a global authorized distributor of electronic components.